


**thin film resistance thermal sensor**



**features**

- LP series is thin-film thermal sensors and accomodates resistance tolerance  $\pm 1\%$  and high T.C.R.  $+5000 \times 10^{-6}/K$  with the standard products
- Suitable for control of temperatures for various industrial equipment
- Products meet EU RoHS requirements

**dimensions and construction**

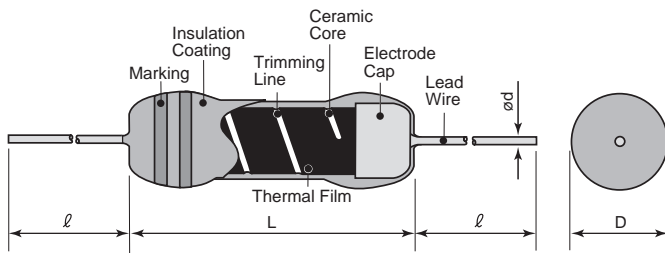

Type	Dimensions inches (mm)			
	L	D	d (Nom.)	I
LP 1/16	.138 <sup>+0.008</sup> <sub>-.016</sub> (3.5 <sup>+0.2</sup> <sub>-.4</sub> )	.067 $\pm$ .008 (1.7 $\pm$ 0.2)	.020 $\pm$ .002 (0.5 $\pm$ 0.05)	1.18 $\pm$ .118 (30 $\pm$ 3)
LP 1/8	.25 $\pm$ .031 (6.35 $\pm$ 0.8)	.090 $\pm$ .008 (2.3 $\pm$ 0.2)	.026 $\pm$ .002 (0.65 $\pm$ 0.05)	1.50 $\pm$ .118 (38 $\pm$ 3)

**EOL**

**ordering information**

LP	1/8	C	T26	A	103	J	362
Product Code	Power Rating	Termination Surface Material	Taping	Packaging	Nominal Resistance	Resistance Tolerance	Symbol of T.C.R.
	1/16: 0.063W 1/8: 0.125W	C: SnCu	Nil: Bulk T26: 26mm Taping T52: 52mm Taping	Nil: Bulk A: AMMO	3 digits	F: $\pm 1\%$ G: $\pm 2\%$ J: $\pm 5\%$	3 digits 151: 150 362: 3600

**applications and ratings**

Type	Power Rating	Thermal Time Constant	Thermal Dissipation Constant*	Rated Ambient Temperature	Operating Temperature Range
LP1/16C	0.063W	8s	2.5mW/°C	+70°C	-55°C-150°C
LP1/8C	0.125W	14s	4.5mW/°C		

\* Thermal time constant and dissipation constant are reference values, which are values of elements and vary with connecting or fixing methods.

T.C.R. ( $\times 10^{-6}/K$ )	T.C.R. Tolerance	$(\Omega)$ Resistance Range (E24 & 2.5, $5.0 \times 10^n$ )					
		LP1/16			LP1/8		
		F: $\pm 1\%$	G: $\pm 2\%$	J: $\pm 5\%$	F: $\pm 1\%$	G: $\pm 2\%$	J: $\pm 5\%$
150, 250, 350 450	$\pm 50 \times 10^{-6}/K$	-	150-10k	150-10k	-	150-51k0	150-51k0
550, 650, 750, 850 950, 1000, 1200 1400, 1600, 1800 2000, 2200, 2400			150-30k	150-30k		150-100k	150-100k
2500 3000 3300 3600 4000, 4500, 5000	$\pm 5\%$	100-30k	10-30k	1-30k	100-100k	10-100k	1-100k
		100-10k	10-10k	1-10k	100-51k	10-51k	1-51k
					100-20k	10-20k	1-20k

T.C.R. Measuring Temperature: +25°C/+65°C. T.C.R. is guaranteed by random inspections.


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

4/10/25


thermal sensors

## environmental applications

### Derating Curve

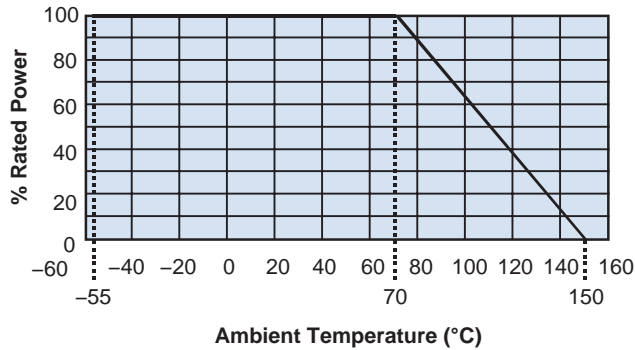

### Examples of Temp. Characteristics of Resistance

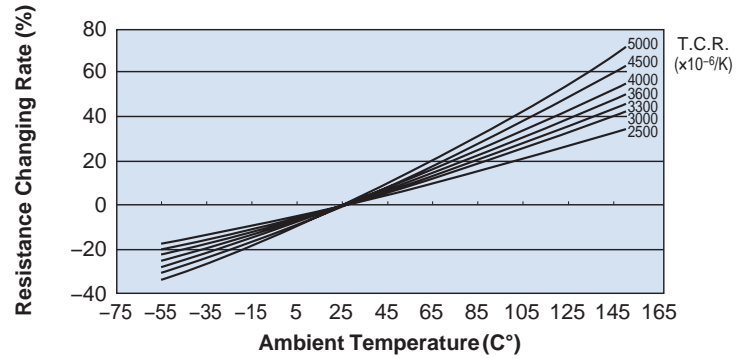

### Approximate Expression for Resistance-Temperature Characteristics

Values are not guaranteed but typical.

$$R_T = R_{25} (C_0 + C_1 T + C_2 T^2)$$

$R_T$ : T°C

$R_{25}$ : 25°C

T: (°C)

$C_0, C_1, C_2$ :

$R_T$ : Resistance value at T°C

$R_{25}$ : Resistance value at 25°C

T: Ambient temperature (°C)

$C_0, C_1, C_2$ : Constants

T.C.R. ( $\times 10^{-6}/K$ )	$C_0$	$C_1$	$C_2$
3000	0.931258	0.00265213	$3.90112 \times 10^{-6}$
3300	0.924355	0.00292569	$4.00516 \times 10^{-6}$
3600	0.916356	0.00323714	$4.34428 \times 10^{-6}$
4000	0.907039	0.00361006	$4.33457 \times 10^{-6}$
4500	0.897412	0.00395222	$6.05201 \times 10^{-6}$
5000	0.886014	0.00437224	$7.48809 \times 10^{-6}$

# EOL

### Performance Characteristics

Test Items	Performance Requirements $\Delta R \pm$ (%+0.05Ω)		Test Methods
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+65°C
Overload (Short time)	0.5%	0.2%	Rated voltage x 2.5 for 5 seconds
Resistance to Soldering Heat	0.5%	0.2%	350°C±10°C, 1 second
Rapid Change of Temperature	0.5%	0.2%	-55°C (30min.) /+25°C (10min.) /+150°C (30min.) /+25°C (10min.) 5 cycles
Moisture Resistance	2%	0.3%	40°C±2°C, 90%–95%RH, 1000h 1.5h ON/0.5h OFF cycle
Endurance at 70°C	2%	0.5%	70°C±3°C, 1000h 1.5h ON/0.5h OFF cycle