





features

- Resistors excellent in overload capability
- Thin SIP shape
- Thick film resistors (RuO₂) ensure high stabilities in life and change in aging
- Marking: Green body color, alpha numeric marking
- Meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

dimensions and construction

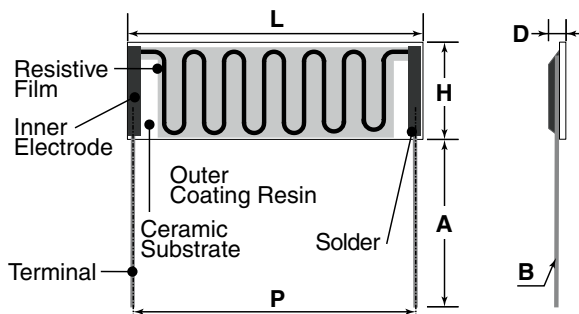

Type	Dimensions inches (mm)					
	L (Max.)	H (Max.)	P	D (Max.)	A	øB (Nom.)
18FL	1.91 (48.5)	.650 (16.5)	1.77±.039 (45.0±1.0)	.098 (2.5)	.010±.039 (30.0±1.0)	.026 (0.65)

ordering information


New Part #	RK92	18FL	4W	D	305	K
	Type	Style	Power Rating	Termination Material	Nominal Resistance	Resistance Tolerance
	RK92	18FL	4W	D: SnAgCu	3 Digits	K: ±10%

applications and ratings

Part Designation	Power Rating	Resistance Range (Ω) K: $\pm 10\%$	T.C.R. ($\times 10^{-6}/K$)	Rated Ambient Temperature	Operating Temperature Range
18FL	4W	1.2M ~ 16M (1.2M, 3M, 4M, 5M, 8M, 12M, 16M)	± 300	+70°C	-40°C to +90°C

environmental applications

Derating Curve

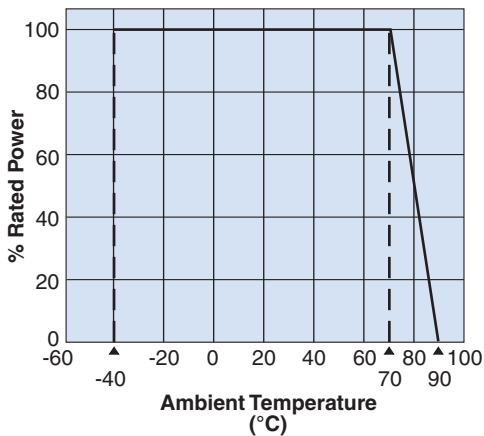

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

Performance Characteristics

Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Resistance to Solder Heat	1%	0.5%	260°C \pm 5°C, 10 seconds \pm 1 second
Temperature Cycling	1%	0.5%	-25°C (30 minutes)/ +125°C (30 minutes) 5 cycles
Endurance	5%	3%	Insulating oil 1000 hours, Rated voltage