


NEW



features


- Wide-side termination (reverse-geometry) type flat chip resistor
- High reliability and performance with T.C.R. $\pm 100 \times 10^{-6}/K$, resistance tolerance $\pm 1\%$
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

dimensions and construction

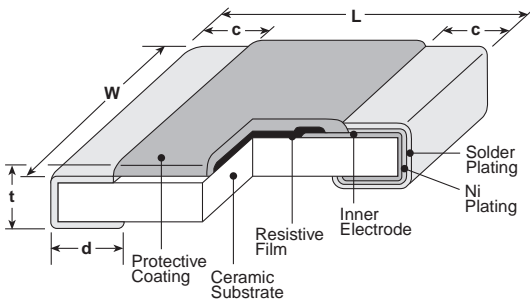

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
2B15 (0612)	.063±.006 (1.6±0.15)	.126±.008 (3.2±0.2)	.012±.008 (0.3±0.2)	.018±.006 (0.45±0.15)	.024±.004 (0.6±0.1)
2H2 (1020)	.098±.006 (2.5±0.15)	.197±.006 (5.0±0.15)	.016±.008 (0.4±0.2)	.030±.006 (0.75±0.15)	
3A3 (1225)	.122±.006 (3.1±0.15)	.252±.006 (6.3±0.15)	.018±.008 (0.45±0.2)		

Derating Curve

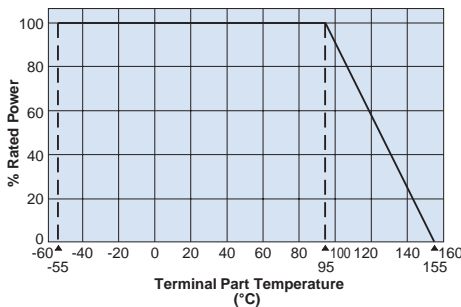

For resistors operated terminal temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve above. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

ordering information

WK73S	2H2	T	TE	33L0	F
Type	Size	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance
WK73S	2B15: 1.5W 2H2: 2W 3A3: 3W	T: Sn	TD: 0612: 7" 4mm pitch punched paper TE: 1020, 1225: 7" 4mm pitch embossed plastic For further information on packaging, please refer to Appendix A	$\pm 0.5\%$, $\pm 1\%$: 3 significant figures + 1 multiplier "R" indicates decimal on value $< 100\Omega$ $\pm 5\%$: 2 significant figures + 1 multiplier "R" indicates decimal on values $< 10\Omega$ All values less than 0.1Ω ($100m\Omega$) are expressed in $m\Omega$ with "L" as decimal. Ex: $33m\Omega$, 1% = 33L0	D: $\pm 0.5\%$ F: $\pm 1\%$ J: $\pm 5\%$


applications and ratings

Part Designation	Power Rating	Rated Terminal Part Temp.	T.C.R. (X 10 ⁻⁶ /K)	Resistance Range (Ω)			Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range
				D±0.5% E-24/E-96	F±1% E-24/E-96	J±5% E-24			
WK73S2B15	1.5W	95°C	±100	430m - 9.76	430m - 9.76	430m - 9.1	200V	400V	-55°C to +155°C
			±200	—	30m - 422m	30m - 390m			
			±800	—	—	10m - 27m			
WK73S2H2	2.0W ¹	95°C	±100	—	220m - 9.76	220m - 9.1	200V	400V	
			±200	—	27m - 215m	27m - 200m			
			±800	—	—	10m - 24m			
WK73S3A3	3.0W	95°C	±100	—	360m - 9.76	360m - 9.1	200V	400V	
			±200	—	33m - 357m	33m - 330m			
			±300	—	22m - 32.4m	22m - 30m			
			±800	—	—	10m - 20m			

Rated voltage = $\sqrt{\text{Power rating} \times \text{resistance value}}$ or max. working voltage, whichever is lower

environmental applications

Device Temperature Data

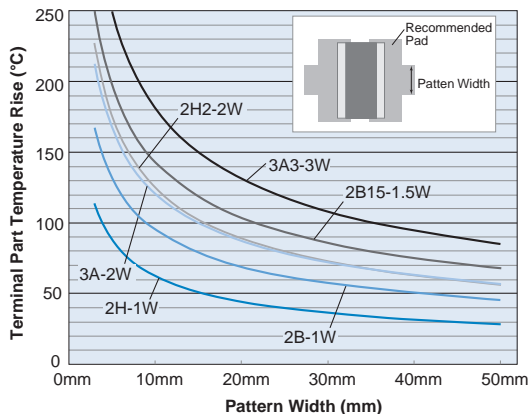

Room Temperature 25°C
 PCB: FR-4 t=1.6mm Cu foil thickness=35μm
 While using under high power, the temperature of the product may increase depending on the condition of heat dissipation from PCB.
 Be sure to check the terminal part temperature as well as precautions for use on delivery specifications before use.

Performance Characteristics

Parameter	Requirement Δ R (±(0.005Ω))		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.2%	Rated voltage x 2.0 for 5 seconds
Resistance to Solder Heat	±1%	±0.2%	260°C ± 5°C, 10 seconds ± 1 second
Bending Test	±1%	±0.1%	Holding point 90mm, Bending 1 time, Bending 5mm
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes)/ +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±0.2%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.2%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±2%: J (±5%) ±1%: all others	±0.5%: J (±5%) ±0.2%: all others	+155°C, 1000 hours

Additional environmental applications can also be found at www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18