

passive  
components

**KOA**<sup>®</sup>  
KOA SPEER ELECTRONICS, INC.





From  
**Concept to Reality**

Our wide range of passive component solutions will help you make the leap

Whether you're designing the car of tomorrow or connecting the Internet of Things, you need cutting-edge product solutions to bring your design to fruition. At KOA Speer, we're the ideal partner to help you do just that. Our constantly expanding line of passive components will give you the solution to make your concept a reality!

**Quality 1<sup>st</sup>**



You expect product quality from any component that makes it into one of your designs. But in today's competitive global marketplace, there's so more to the quality equation. At KOA Speer, our Quality 1st initiative reinforces our organization wide focus on serving you at the highest possible level.



Our commitment to quality in everything we do is paying off... in the past two years we've received ten major customer quality awards. We're the industry's most recognized and awarded supplier for achieving the highest product quality, on-time delivery and responsive customer service.

# KOA SPEER... More Than Just Resistors

## Resistors



Precision • Surge • Wide Terminal  
High Voltage • Thin Film  
High Temperature • Embedded • General Purpose  
Networks • Anti-Sulfur • Fusing • Melf

## Low Resistance Current Sense/Shunts




Metal Plate • Thick Film • Power Shunt  
Molded • Wide Terminal

## Leaded Resistors



General Purpose Carbon Film  
Precision Metal Film • High Voltage • Power  
Wirewound • Current Sense • Networks  
Fusing • Jumpers

## Thermistors/ Thermal Sensors

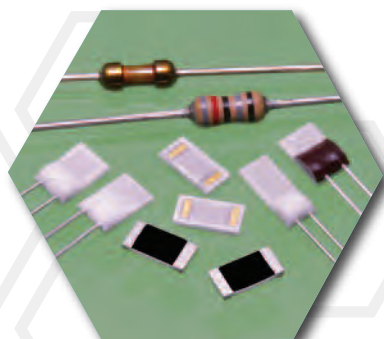

Platinum Thin Film  
Thin Film Linear PTC  
Thick Film Linear PTC  
NTC Thermistors • PTC Thermistors

## Inductors



Chip Inductors • Power Inductors

## Fuses




Flat Chip • Molded  
Ceramic Case

## Varistors



Chip Varistors • Automotive Varistors  
Disk Varistors

## LTCC Substrates

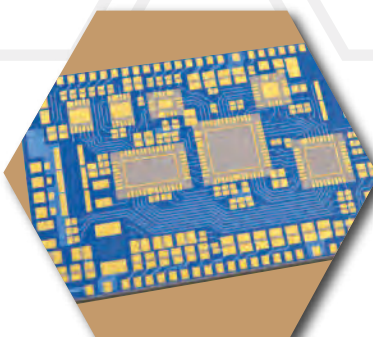

LTCC Substrates • Hybrid IC

## Other Products



Check Terminal




# KOA® Current Sense Resistors Selection Guide

**KOA SPEER ELECTRONICS, INC.**

KOA offers complete family of Current Sense Resistors capable of sensing large to small currents with ultra-low resistance  
 Applications: Current management sensor including charge/discharge of secondary batteries • Current control sensor of motors and DC/DC converters • Circuit protecting sensor by overcurrent detection

## Current Sense Resistors


## Current Ratings (A)

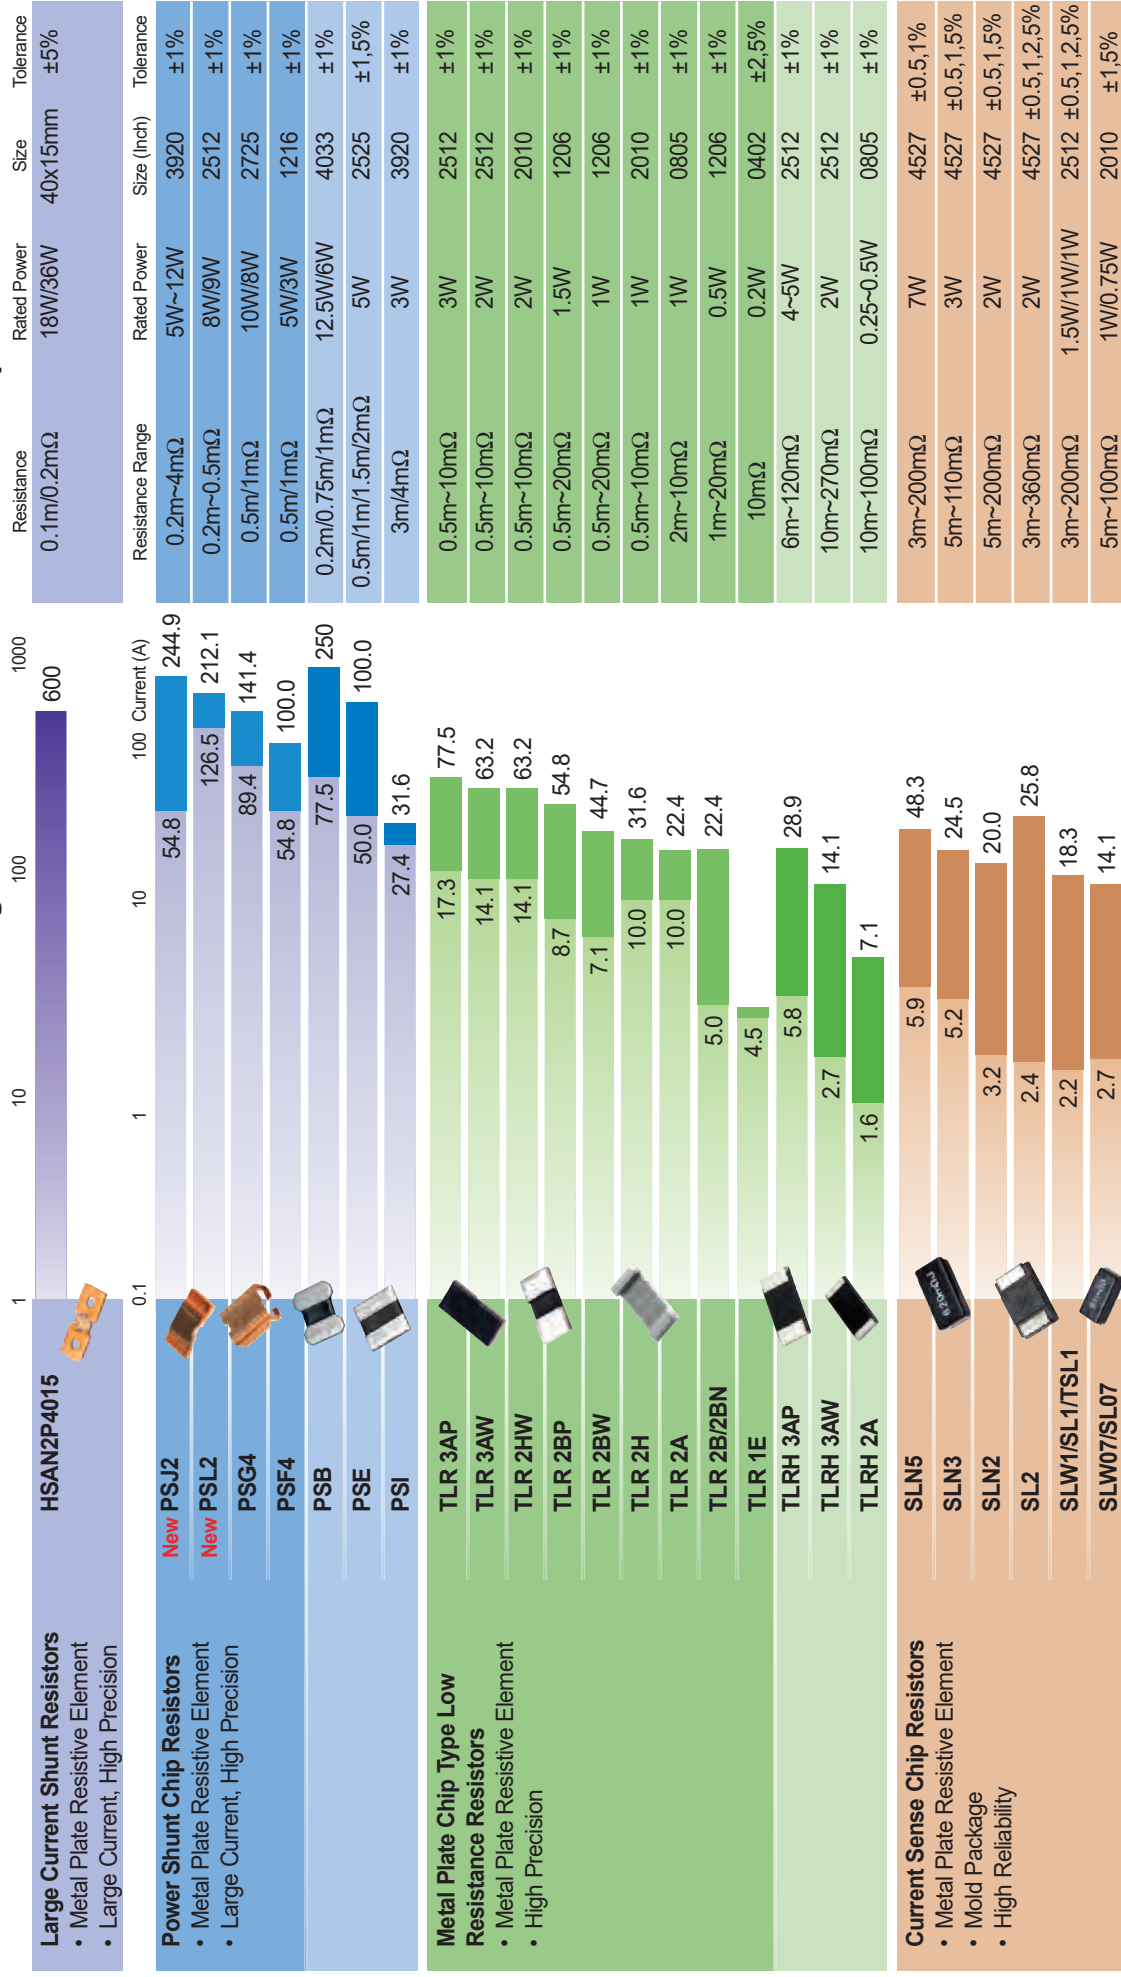



## Current Sense Resistors

## Current Ratings (A)

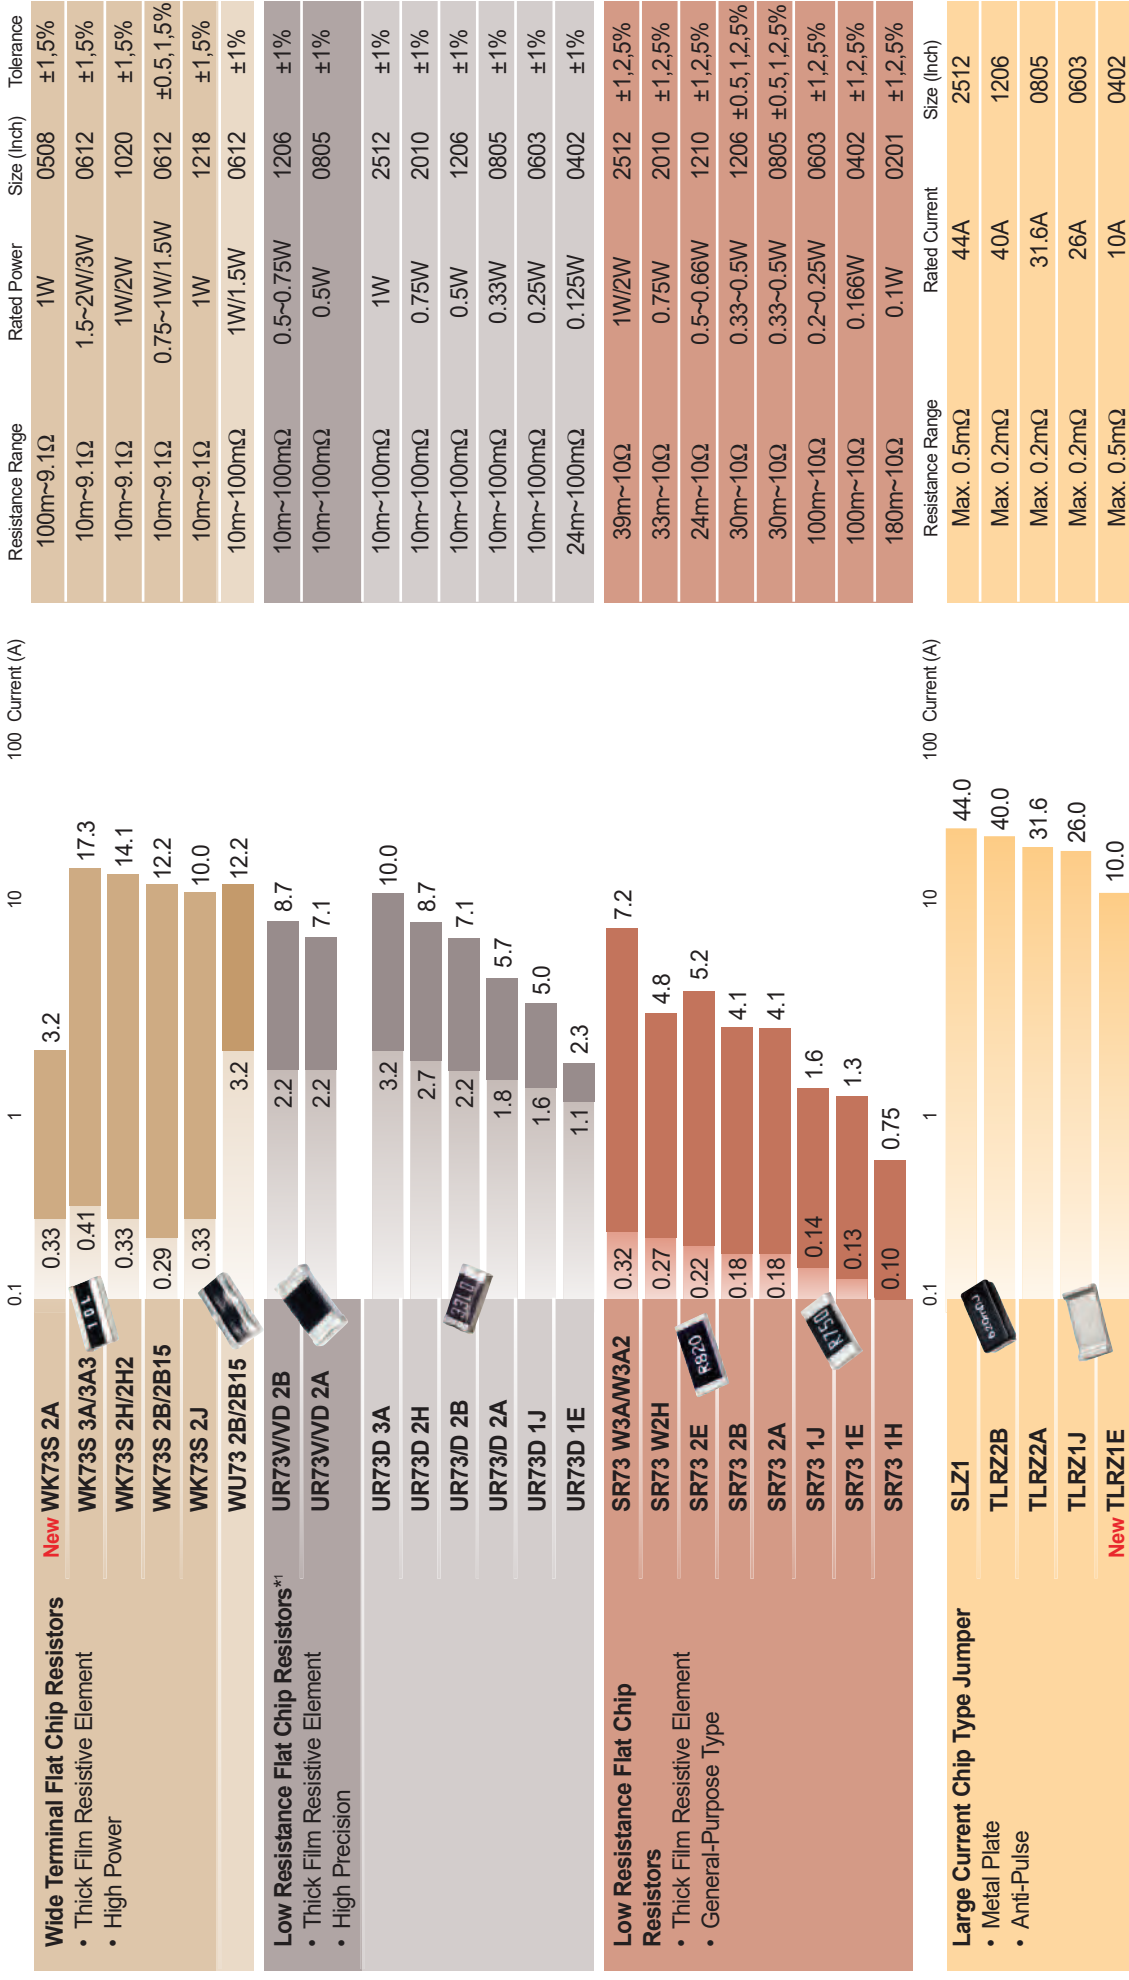

• This selection guide plots the current value calculated from (Power rating÷upper or lower limit of resistance). Please build the design considering heat dissipation.  
 • This is the guideline to select products by current value. Please confirm product specification for actual design and selecting products and use the products based on the precautions to use.  
 • Please confirm our catalog or delivery specification for the details of each product.

\*1 UR73/UR73D is only applied for car accessories as automotive use. Please ask us for details.

Type	Category	Part Type	Description	Pages		
<b>Resistors</b>	Surface Mount Resistors	Introduction of the Derating Curve		12-13		
		Caution & Terms		14		
		RK73B	General purpose 2%, 5% tolerance thick film chip resistor	15-16		
		RK73H	Precision 0.5%, 1% tolerance thick film chip resistor	17-18		
		RK73Z	Zero ohm jumper chip resistor	19-20		
		RK73G	Thick film 0.5%, 1% tolerance, 50ppm/°C chip resistor	21-22		
		RK73F	Thick film 0.25%, 25ppm/°C chip resistor	23-24		
		<b>NEW</b> RS73	High reliability chip resistors	25-26		
		RN73H	High heat resistance metal film chip resistor	27-28		
		RN73	Ultra precision 0.05%, 0.1%, 1% tolerance thin film chip resistor	29-30		
		<b>NEW</b> HRK73	High temperature flat chip resistors	31-32		
		WK73R	Wide terminal type flat chip resistor	33-34		
		WK73R	Higher power wide terminal type flat chip resistor	35-36		
		<b>NEW</b> WG73	Thick film, wide terminal, anti-surge chip resistor	37-38		
		SG73	Surge current thick film chip resistor	39-40		
		SG73P	Pulse/surge current thick film chip resistor	41-42		
		SG73S	Pulse/surge current thick film chip resistor	43-45		
		SG73G	Ultra precision grade surge pulse power resistor	46-47		
		HV73	Flat chip resistors for high voltage	48-49		
		HV73V	Flat chip resistors for high voltage (Automotive)	50-51		
		RK73-RT	Flat chip resistor (Anti-Sulfuration)	52-54		
		RK73G-RT	Flat chip resistor (Ultra precision grade, Anti-Sulfuration)	55-56		
		<b>NEW</b> RS73-RT	High reliability chip resistors (Anti-Sulfuration)	57-58		
		WK73-RT	Wide terminal type flat chip resistor (Anti-Sulfuration)	59-60		
		WK73-RT	Higher power wide terminal type flat chip resistor (Anti-Sulfuration)	61-62		
		SG73-RT	Surge current flat chip resistors (Anti-Sulfuration)	63-64		
		SG73P-RT	Pulse/surge current thick flat chip resistor (Anti-Sulfuration)	65-66		
		SG73S-RT	Pulse/surge current thick flat chip resistor (Anti-Sulfuration)	67-69		
		HV73-RT	Flat chip resistors for high voltage (Anti-Sulfuration)	70-71		
		HV73V-RT	Flat chip resistors for high voltage (Automotive—Anti-Sulfuration)	72-73		
		SR73-RT	Surge current thick film chip resistor (Anti-Sulfuration)	74-75		
		XR73B/H/Z	Flat chip resistor for embedded substrates	76-77		
		RF73	Fusing flat chip resistor	78-79		
		Networks & Arrays		CN	Concave termination with square corners resistor array	80-81
				CN_K/N	Convex termination with square corners resistor array	82-83
				CN-RT	Anti sulfuration chip networks (concave termination)	84-85
				CN-KRT	Anti sulfuration chip networks (convex termination)	86-87
				CND	Bussed square corner resistor array	88-89
				CNB	Bussed concave termination square corner resistor array	90-91
				CNN	Thin film chip networks	92-93
				HVD	High voltage divider, precision type network	94-95
				CN_A	Convex termination with scalloped corners resistor array	96-97
				CNZ	Zero ohm jumper resistor array	98-99
				RB(X), RD(X), RT(X)	Integrated passive components	100-102
				RIA, RNX	Isolated and custom resistor networks	103
		RTY	Precision voltage divider	104		
		TF(X)	R/C filter networks	105-106		
		DN(X)	Diode terminator networks	107-108		
		AC(X)	AC terminator networks	109-110		
<b>Low Resistance Current Sense/Shunts</b>		HS	Large current shunt resistor	111-112		
		PSJ2, PSL2	Current sensing power shunt	113-114		
		<b>NEW</b> PSG4, PSF4	Current sensing power shunt	115-116		
		PSB	Chip type power shunt resistor	117-118		
		PSI, PSE	Chip type power shunt resistor	119-120		
		TLR1E, 2A	Metal plate chip type low resistance resistor	121-122		
		TLR	Metal plate current sense resistor	123-124		
		TLR-W-P	Metal plate current sense resistor	125-126		
		TLRZ	Jumper chip, current sense resistor	127-128		
		TLRH	Metal plate chip type low resistance resistors	129-130		
		SL, SLN, TSL	Surface mount molded current sense resistors	131-133		
		SL1, SL2	Surface mount molded current sense resistors	134-135		
		SLW, SLN	Surface mount molded current sense resistors	136-137		
		WK73S	Wide terminal type current sense flat chip resistor	138-139		
		WK73S	Higher power wide terminal current sense flat chip resistor	140-141		
		WU73	Wide terminal, low resistance flat chip resistor	142-143		
		UR73V	Low resistance flat chip resistor	144-145		
		UR73	Current sensing chip resistor	146-147		
		SR73	Lo-ohm 0.5%, 1%, 2%, 5% tolerance thick film current sense resistor	148-149		
		SR73	Higher power surge current thick film chip resistor	150-151		
BLR	Ceramic case surface mount resistor	152-153				
LR72A, B, C	Metal plate current sense resistors	154-155				
CSR	Four-terminal current sense resistor	156-157				
RN41, RM41, RD41	Fixed carbon film melf resistor	158-160				
<b>Leaded Resistors</b>		CF	Carbon film leaded resistors	161-162		
		MF, MFS, RK	General purpose metal film leaded resistor	163-164		
		Z, J	Zero ohm jumpers	165-166		
		JL	Jumper wire	167		
		RNS	MIL approved metal film leaded resistor	168-169		



MRS	Plate-shaped high precision metal film resistor	170-171
RCR	Anti-surge power type leaded resistor	172-173
GS	High voltage high resistance thick film resistors	174-175
RK92	High voltage thick film resistor	176-177
<b>NEW</b> RK92-L	High voltage thick film discharge resistor	178-179
PCF	Ceramic resistors for anti pulse surge	180-181
HPC	Ceramic resistors for anti pulse surge	182-183
CPCN	Fixed ceramic melf resistor	184-185
PSN, PV, PSO		
PN, PWW, PAP	High voltage power resistors	186-188
MOS	Reduced size metal oxide power type leaded resistor	189-192
SPR	Power carbon film leaded resistor	193-194
CWFS	Coat-insulated wirewound resistor (with fusing functional)	195-196
CW, CWP, CWH	Coat-insulated, precision coat-insulated and miniature wirewound leaded resistors	197-199
RW	Coat-insulated miniature precision power wirewound resistors	200-201
BGR, BWR, BSR	Rectangular type wirewound resistors	202-206
BGRV, BSRV	Cemet ceramic for automotive type	207-208
BPR	Rectangular type metal plate resistor	209-210
LR	Custom milliohm resistor	211-212
RF	Coat-insulated fusing resistor	213-214
RF25CC	Coat-insulated fusing resistor (Constant current fusing type)	215-216
MRP	Precision metal film resistor SIP network	217-218
RKC, RKH, RKL	Thick film SIP resistors	219-222
CR	CR networks	223-224
<b>Thermistors/Thermal Sensors</b>	<b>Caution &amp; Terms</b>	<b>Thermal Sensors</b>
		225
	SDT73H, SDT73S	SMD platinum thin film thermal chip sensors
		226-227
	SDT73V	SMD platinum thin film thermal chip sensors (Automotive)
		228-229
	SDT310VASP	Small type platinum thin film thermal sensor (Small heater element)
		230-232
	SDT310HCTP	Small type platinum thin film thermal sensors (Narrow)
		233-234
	SDT310	Platinum thin film thermal sensors
		235-237
	SDT101	Platinum thin film thermal sensors
		238-239
	ST	Thermal sensors
		240-243
	AFS	Air flow sensor units
		244-245
	LP73	Thin film resistance thermal chip sensor
		246-247
	LT73V	Linear positive temperature coefficient flat chip resistors
		248-249
	LT73	Linear positive tempco thermistor
		250-251
	LA73	Thick film linear positive tempco thermistor
		252-253
	LP	Thin film resistance thermal sensor
		254-255
	NT73	Negative tempco thermistor
		256-257
<b>Inductors</b>	<b>Caution &amp; Terms</b>	<b>Inductors</b>
		258
	KQC	High current inductor
		259-260
	KQ	High Q inductor
		261-266
	LPC4235, LPC4545	Power chip inductor
		267-269
	MHL	Multilayer ceramic inductor
		270-271
	CZB	Multilayer ferrite bead
		272-273
	CZP	Multilayer power ferrite bead
		274-275
<b>Circuit Protection</b>	<b>Caution &amp; Terms</b>	<b>Fusing Components</b>
		276
	TF	Thin film chip fuse
		277-278
	TF16VN	Chip current fuse (Automotive)
		279-280
	CCP	Chip fuse
		281-282
	CCF1N	Chip fuse
		283-284
	CCF1F	Chip fuse (IEC)
		285-286
	<b>Varistors</b>	<b>Caution &amp; Terms</b>
		287
	NV73	Metal oxide varistor
		288-293
	NV73DL	Multilayer type metal oxide varistors (Automotive)
		294-295
	NV73DS	Load dump surge varistors (Automotive)
		296-297
<b>Substrates &amp; Other Products</b>	KLC	LTCC multilayer substrates
		298-299
	KA	Hybrid IC
		300
	MCM	Multi-chip module
		301
	RC	Test point chip
		302
<b>Appendix</b>	<b>A - Packaging - Surface Mount Components</b>	303-305
	<b>B - Pad Dimensions</b>	306-309
	<b>C - Packaging - Leaded Components</b>	310-321
	<b>D - Marking and Standard Values</b>	322-323
<b>Additional Information</b>	<b>Terms and Definitions</b>	324
	<b>Lab Kits</b>	325-326
	<b>KOA Sales Representatives</b>	327
	<b>KOA Distributors</b>	328-330
	<b>Global Network</b>	331



KOA SPEER ELECTRONICS, INC.

# Alphabetical Index

Type	Pages		
AC(X)	109-110	LT73V	248-249
AFS	244-245	MCM	301
BGR	202-206	MF	163-164
BGRV	207-208	MFS	163-164
BLR	152-153	MHL	270-271
BPR	209-210	MOS	189-192
BSR	202-206	MRP	217-218
BSRV	207-208	MRS	170-171
BWR	202-206	NT73	256-257
CCF1F	285-286	NV73	288-293
CCF1N	283-284	NV73DL	294-295
CCP	281-282	NV73DS	296-297
CF	161-162	PAP	186-188
CN	80-81	PCF	180-181
CN_A	96-97	PN	186-188
CN_K/N	82-83	PSB	117-118
CN-KRT	86-87	PSE	119-120
CN-RT	84-85	PSF4	115-116
CNB	90-91	PSG4	115-116
CND	88-89	PSI	119-120
CNN	92-93	PSJ2	113-114
CNZ	98-99	PSL2	113-114
CPCN	184-185	PSN	186-188
CR	223-224	PSO	186-188
CSR	156-157	PV	186-188
CW	197-199	PWW	186-188
CWFS	195-196	RB(X)	100-102
CWH	197-199	RC	302
CWP	197-199	RCR	172-173
CZB	272-273	RD(X)	100-102
CZP	274-275	RD41	158-160
DN(X)	107-108	Resistors - Caution & Terms	14
Fuses - Caution & Terms	276	RF	213-214
GS	174-175	RF25CC	215-216
HPC	182-183	RF73	78-79
HRK73	31-32	RIA	103
HV73	48-49	RK	163-164
HV73-RT	70-71	RK73-RT	52-54
HV73V	50-51	RK73B	15-16
HV73V-RT	72-73	RK73F	23-24
HVD	94-95	RK73G	21-22
Inductors - Caution & Terms	258	RK73G-RT	55-56
J	165-166	RK73H	17-18
JL	167	RK73Z	19-20
KA	300	RK92	176-177
KLC	298-299	RK92-L	178-179
KQ	261-266	RKC	219-222
KQC	259-260	RKH	219-222
LA73	252-253	RKL	219-222
LP	254-255	RM41	158-160
LP73	246-247	RN41	158-160
LPC4235	267-269	RN73	29-30
LPC4545	267-269	RN73H	27-28
LR	211-212	RNS	168-169
LR72A, B, C	154-155	RNX	103
LT73	250-251	RS73	25-26
		RS73-RT	57-58
		RT(X)	100-102
		RTY	104
		RW	200-201
		SDT101	238-239
		SDT310	235-237
		SDT310HCTP	233-234
		SDT310VASP	230-232
		SDT73H	226-227
		SDT73S	226-227
		SDT73V	228-229
		SG73	39-40
		SG73-RT	63-64
		SG73G	46-47
		SG73P	41-42
		SG73P-RT	65-66
		SG73S	43-45
		SG73S-RT	67-69
		SL	131-133
		SL1	134-135
		SL2	134-135
		SLN	131-133
		SLN	136-137
		SLW	136-137
		SPR	193-194
		SR73	148-149
		SR73	150-151
		SR73-RT	74-75
		ST	240-243
		TF	277-278
		TF(X)	105-106
		TF16VN	279-280
		Thermal Sensors - Caution & Terms	225
		TLR	123-124
		TLR-W-P	125-126
		TLR1E, 2A	121-122
		TLRH	129-130
		TLRZ	127-128
		TSL	131-133
		UR73	146-147
		UR73V	144-145
		Varistors - Caution & Terms	287
		WG73	37-38
		WK73-RT	59-60
		WK73-RT	61-62
		WK73R	33-34
		WK73R	35-36
		WK73S	138-139
		WK73S	140-141
		WU73	142-143
		XR73B/H/Z	76-77
		Z	165-166
		Appendix A	303-305
		Appendix B	306-309
		Appendix C	310-321
		Appendix D	322-323
		Lab Kits	325-326



At KOA, we know taking care of the environment is important. That is why we have taken the steps to ensure we offer a product that fits your needs while adhering to global environmental regulations. In 2006, we complied with the EU's RoHS Directive, allowing us to offer products that are RoHS compliant, and in 2007 we met guidelines outlined in the IT Products Pollution Control Act for the People's Republic of China. In addition, we are now enforcing stricter chemical regulations set by Europe through watching the chemical input of our products. Our laboratory is now ISO/IEC 17025 certified, and we are constantly working to think of ways to improve our technology, such as by offering halogen-free specifications. By actively addressing our environmental impact today, you can be certain KOA will be there in your future.



## What is EU RoHS?

The Restriction of Hazardous Substances Directive (2002/95/EC), (RoHS), has become effective on July 1 of 2006 requiring the usage restriction of following six hazardous substances in the manufacture of electrical and electronic equipment placed on the market. This directive was amended on 8 June 2011, to Directive 2011/65/EU of the European Parliament and of the Council and each EU member state must adopt it into national law by 2 January 2013. RoHS 2002/95/EC before the amendment is replaced by RoHS 2011/65/EU where the restricted materials or maximum concentration value remain unchanged.

- Lead (0.1wt%)
- Mercury (0.1wt%)
- Cadmium (0.01wt%)
- Hexavalent Chromium (0.1wt%)
- PBBs (Polybrominated biphenyls) (0.1wt%)
- PBDEs (Polybrominated diphenyl ethers) (0.1wt%)

\* The percentage in parentheses shows the maximum concentration value in the homogeneous material.

The restriction of applications in the annex in the directive is exempted. KOA's products applicable with this exemption to EU RoHS are as follows (as of July, 2016):

- Copper alloy containing up to 4% lead by weight
- Lead in high melting temperature type solders (i.e. lead-based alloys containing 85% by weight or more lead)
- Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound.

To meet EU RoHS, you have to choose lead (Pb) free material for termination surface material when our product has both type designation, leaded and lead free.

Please contact our sales representatives for details.

## Revised Chinese RoHS

### (Management Methods for the Restriction of the Use of Hazardous Substances in Electrical and Electronic Products)

Chinese RoHS became effective in March 2007 and the Revised Chinese RoHS was promulgated in January 2016 and became effective on July first 2016. However, the Compliance management catalogue of the second step (inclusion restriction) is not established at the present moment, so only the first step (obligation for applying identification) is valid.

Index page of this catalog shows the products that contain six hazardous substances less than threshold level, indicated by O-mark.

For each product, we disclose the content information of the six hazardous substances directed by Chinese RoHS. Please contact our sales representatives for details.

## REACH

"Regulation concerning the Registration, Evaluation, Authorization and Restriction of Chemicals" (REACH) has been enforced on June 1 of 2007 in EU area.

This regulation is aiming at safety evaluation and risk management of chemical substances, which are required to register according to the amount if used in businesses. Substance of Very High Concern (SVHC) must be registered if it is included in article. Information on such substances is also required through supply chain.

### Precautions

All product specifications and data are subject to change without prior notice. Be sure to request and confirm the latest technical specifications before you order or use a part.

*The following precautions apply to all products*

#### General

- For precautions in general, refer to "JEITA RCR-1001B Safety application guide on components for using electronic and electrical equipment" issued by JEITA.

#### Application

- Confirm application parameters before the use of products, and please contact KOA in advance when products are to be used in critical, high-reliability equipment such as transportation (automobiles, airplanes, trains, boats, and ships), medical equipment, space equipment, energy, traffic, and information facilities. Unless the particular conditions and scope of liability is defined in mutually accepted contract documents, KOA will not be liable for issues arising from design or use in these applications.
- Consider sufficient fail-safe design if the products are used in high-reliability applications. Ensure the safety of the whole system by using proactive and redundant circuits to avoid unsafe operation due to a single product failure.

#### Environment for Use

- Unless otherwise specified, these products are not to be used in special environments. Examine and confirm performance and reliability before you use KOA products in any of the following environments:
  - Under direct sunlight, exposed to the outside or to dust.
  - In liquids such as water, oil, organic solvent, or liquid chemicals or in areas where these liquids are used.
  - In locations where the products are exposed to salt-water breezes or corrosive gases, including SO<sub>2</sub>, H<sub>2</sub>S, Cl<sub>2</sub>, NH<sub>3</sub>, NO<sub>2</sub>, etc.
  - In locations with high static electricity and strong electromagnetic waves.
  - In locations subject to condensation from dew.
  - When the products or PCBs are sealed and coated by resin or other coating materials.
  - In locations where the products are exposed to the fumes of lubricating oil.

#### Sulfuration

- Products with silver-based electrodes may increase in resistance in atmospheres containing sulfur gases (H<sub>2</sub>S, SO<sub>2</sub>, etc.) or when exposed to sulfide compounds. Take anti-sulfur measures in these environments.

#### Anti-pulse Characteristics

- If transient overloads such as power pulse or voltage/current surges are applied to KOA products, performance and reliability may be degraded. Contact KOA for data on antipulse characteristics and design help.
- Pay attention to discharges between terminations (arc-over) when high voltages are applied.

#### Storage

- Store KOA products in dust-free areas and keep them away from extreme temperatures; moisture; condensation; direct sunlight; salt-water breezes; corrosive gases such as SO<sub>2</sub>, H<sub>2</sub>S, Cl<sub>2</sub>, NH<sub>3</sub>, NO<sub>2</sub>, etc.; or fumes from lubricating oil. Use desiccants if necessary.
- Please contact KOA for conditions and length of storage.

#### Storage of the Products with Lead-free Termination

- Solderability may degrade faster for products with Pb-free terminals than for products with Pb-bearing terminals.

#### Mounting

- Avoid physical damage or shock to the products, which may happen by holding them with hard tools like pliers or tweezers or by imperfect mounting-machine alignment. This damage may affect electrical characteristics or lead to disconnection or cracking.
- If the bottom point of the mounting nozzle is too low, a product could be pushed onto the PCB, which may deteriorate electrical characteristics or lead to cracking. Decelerate the nozzle just before mounting, and mount the product after correcting PCB deformations.
- Do not use products that have fallen during mounting or that have already been removed from a PCB.
- Contact KOA if PCBs are molded or sealed by coating material after component mounting.
- Do not stack PCBs after mounting, because this may damage the components.
- The electrical characteristics of film-type resistors and sensors may be changed by electrostatic overvoltage. Keep electrostatic discharge away from components when assembling and handling by monitoring machines and human contact.
- Prevent or eliminate the introduction of ionic substances like salt, salinity, or sweat, as these substances may degrade resistance due to moisture or corrosion.

#### Soldering

- Perform soldering within the temperature, time, and number of cycles specified for the product or its precautions. If a product is exposed to high temperatures for long periods of time, its color or electrical characteristics may change or disconnection may occur.
- Prevent any external force from being applied to the products until solder has cooled.
- Handle carefully to prevent mechanical stresses, such as from the bending or warping of a PCB, on the solder fillet.
- Confirm that solder flux residue does not affect the product.
- Confirm that components are in place when conductive adhesive is used in place of solder.

#### Precautions for Soldering with Lead-free Solder

- In Pb-free soldering, temperature may be higher than in the use of eutectic solder. Confirm that soldering is acceptable under actual conditions.
- Solder fillets may lift off double-sided boards with through holes. Confirm the solder strength on actual board material before assembly.

#### Washing

- Confirm that solder flux residue does not remain after washing, because it may cause deterioration of moisture and corrosion resistance.
- Confirm reliability in advance when using no-clean solder, water, or a soluble agent.
- Since Pb-free solder may contain many ionic materials, use RMA type solder or flux or wash sufficiently.
- Wash thoroughly after soldering to remove ionic substances like sweat and salinity. Control the washing agent appropriately to remove all ionic substances. Consult KOA when using a washing agent such as acid, alkaline, or organic solvent other than alcohol.
- Ultrasonic washing may damage products due to vibration resonance. High hydraulic pressure may also damage products. Ask KOA in advance for washing conditions.
- Dry products thoroughly after washing.

#### Dispose of the Products


- Observe appropriate laws and regulations for handling and disposal of products or packing materials.



The following precautions apply to surface mount devices


### Precautions Related to PCB Bending Stress

- Arrange the long side of chip components parallel with the direction of the smaller coefficient of thermal expansion in anisotropic PCBs.
- Cracking of the solder fillet may occur with thermal cycling, because of mismatch of coefficients of thermal expansion between the board and the component. Pad size, amount of solder, and amount of heat radiating from the PCB must be designed carefully, especially with large components of 5 mm x 2.5 mm or larger.
- If products are mounted near a depaneling line, the termination or component may be damaged by large stresses during depaneling. Mount the products as shown in the following figure to minimize depaneling stress.

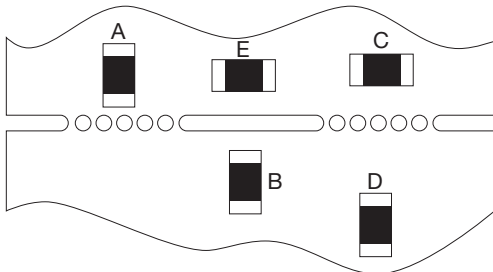

The level of stress on terminations  $A > B \neq C > D > E$

- Use proper layouts to avoid stress from warping, bending, or deformation of the board in order to avoid solder cracking or component damage.

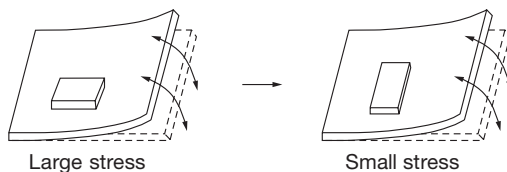

- Pay careful attention to products mounted near the edge of the board or near connectors, since stresses may happen during connection.
- Pay careful attention to layout when products are mounted near large components, when solder solidifies, it creates a stress in directions based on the large components, and cracking may occur.
- Design solder pads to be equal. If solder pads differ in size, they may change electrical characteristics or cause cracking and tombstoning when solder is cooling.

### Mounting and Soldering

- Poor mounting machine adjustment may cause cracking, chipping, or alignment errors. Check and inspect the mounting machine in advance.
- Set backup pins in an appropriate layout to avoid damage to components mounted on the back of the board. Do not set these pins at nozzle positions.
- Adjust the bottom dead point of a dispenser away from the board when you apply adhesive to avoid damage to components mounted on the back of the board.
- Confirm that products solder properly if wave soldering is used.
- Pay close attention to amount of solder, since an improper amount may create a large stress on the component and cause cracking or malfunctions.

### Soldering with a Soldering Iron

- Solder using a soldering iron at the temperature specified in the technical specifications or precautions for each product.
- Perform preheating as much as possible.
- Keep the tip of the soldering iron away from the body and the product terminal.
- Avoid physical damage or shock to components when using hard tools like pliers and tweezers.

The following precautions apply to through-hole devices

### Mechanical Stress

- Play close attention to vibration resonance after mounting.
- Do not add additional bending or twisting stresses to the product.
- Fix large components firmly.
- When lead wires are to be bent, use a large radius of curvature to avoid excessive stress on the terminal joint. Excessive stresses may cause the lead wire to separate from the electrode cap and damage the product.
- Do not add excessive stresses to the product body when lead wires are cut or held by the mounting machine.

### Temperature Rise

- Pay close attention to heat radiation and interaction with other components, since large resistors general a large amount of heat when the rated power is applied.

### Higher Power Ratings

In some cases, KOA will increase the power rating for a given component. Often, the older power rating and newer power rating are both given on the specification, in order to create a transition period. During this time, the new power rating will often have a note asking for discussion with KOA.

A higher power rating is based on appropriate resistance stability, but other ratings and parameters still require attention. For example, voltage rating is based on a separate failure mechanism and will not be increased in the same ratio. In mid- and high-value resistors, power dissipation will still be kept lower than the new rating by the voltage limit. In addition, using a resistor at a higher power than its previous rating will create a greater rise in temperature on the surface of the component. This temperature rise should be checked for acceptability and to make sure that the layout does not place the resistor near a board material or component that could be damaged by greater heat.

### Introduction of the Derating Curves Based on the Terminal Part Temperature

#### Background

Recent studies have led to better practices for miniaturizing high-power components in high-temperature automotive environments. Applications that require high-temperature resistors have increased dramatically. Recently, derating guidelines based on the resistor's terminal temperature, such as the diagram in figure 1, have been introduced to respond to these requirements.

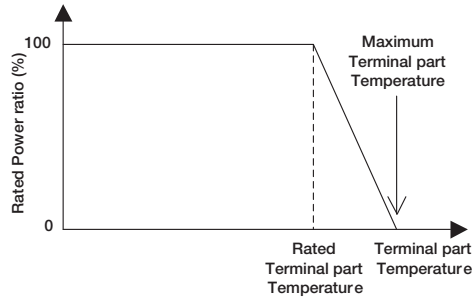


Figure 1. Derating curve based on the terminal part temperature

Derating by terminal temperature has already been used for metal-plate current-sense resistors with very low resistance values (such as the PSB and PSE series). These resistors are used to sense large currents in inverters and converters, and nearby switching elements or high-current conductors can lead to a local temperature increase at the resistor terminal beyond the temperature generated by the resistor itself. The techniques learned in designing these applications are now being extended to general-purpose components.

#### Overview of the Establishment of the Derating Curves Based on Ambient Temperature

The traditional derating curve, which is based on ambient temperature, was defined by IEC and JIS during the vacuum tube era, long before the appearance of surface-mount resistors. At the time, there were no printed circuit boards, and cylindrical resistors with lead wires were held above the board by lug terminals, as shown in figure 2.

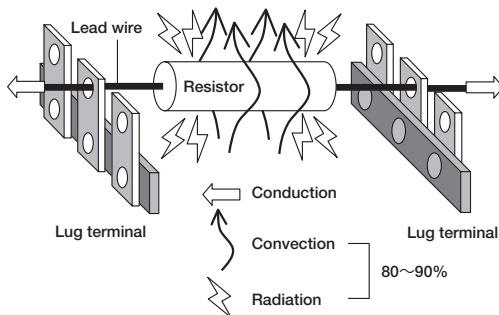


Figure 2. Heat dissipation of cylindrical resistors

Regardless of the shape of the resistor, the heat generated by its use is dissipated through three pathways. One path is conduction through solids such as the terminal. The second path is convection, usually heat transfer into the air by natural convection. The third path is radiation of infrared. Of these pathways, conduction increases with the area of solid connected to the resistor. Convection and radiation increase with the total surface area of the resistor.

When cylindrical resistors with lead wires are mounted on lug terminals, the lead wire is long and thin, so the thermal resistance to conduction is high, and heat dissipation through that path is low. On the other hand, the dissipation of heat by convection and radiation is high, because the surface area of the resistor is large. Simulation shows that 80% to 90% of the heat from a cylindrical, lead-wire

resistor is dissipated directly into the ambient air. The temperature of the resistor can be calculated by adding the temperature rise caused by self-heating to the ambient temperature. Because the ambient is sufficient to estimate the thermal resistance for most of the heat dissipation, the traditional derating curve was based on it.

#### Heat Dissipation of Surface Mount Resistors

Figure 3 shows the main heat dissipation paths for modern surface mount resistors. This type of resistor has only a small surface area, so convection and radiation have proportionally less heat dissipation. On the other hand, since the device is directly connected to the PCB pattern by a large part of the surface area, conduction will be the primary path for heat dissipation. In general, conduction through the terminal to the board represents over 90% of the heat dissipation, even when convection and radiation are presumed to be at their maximum levels. Therefore, the terminal temperature, on the main heat pathway, is the best location to monitor for controlling power dissipation.

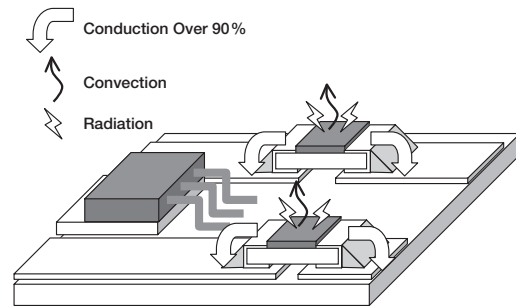


Figure 3. Heat dissipation of surface mount resistors

#### Derating Curve Suitable for the Surface Mount Resistor

As shown in figure 4, when a given amount of power is applied to the resistor, any given point on the resistor's surface will have the same temperature rise over the terminal temperature, regardless of ambient temperature. This is because there is very little heat dissipation from the resistor's surface to the ambient air.

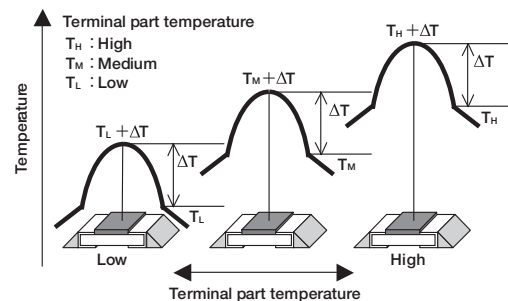


Figure 4. Contributing factor to the temperature of the surface mount resistor

However, surface temperatures at a given power will differ between different PCB designs, since the terminal temperature will be different. When resistors are mounted close to each other or other heat-generating devices, as shown in figure 5, there is a possibility that the temperature will be higher than the 70°C ambient temperature threshold used in the traditional JIS/IEC derating curve.

The traditional derating curve based on ambient temperature usually uses 70°C as the ambient temperature above which parts are to be derated. There will be no problem if resistors are used with sufficient electrical and thermal margin, but recent trends to miniaturization, high power density, and high-temperature use have reduced margins on design.

Redefining derating based on terminal temperature is a way to better represent the capabilities of the part. KOA will provide a derating curve suitable for surface mount resistors, based on testing under conditions where power rating is defined in terms of terminal temperature (as seen in terms & definitions).

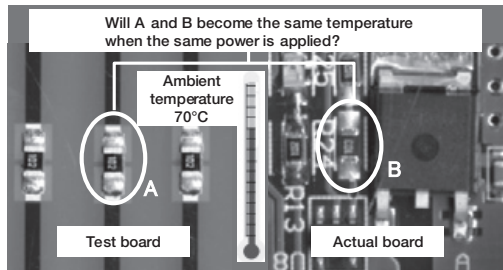


Figure 5. Temperature differs depending on the board

### How to Use the Derating Curve Based on the Terminal Part Temperature

Here are some examples on using terminal temperature derating that lead to greater factors of safety, reduction in number of resistors, or use of a smaller component. The prior conditions will be the following (Be aware that the terminal part temperature does not always become 120°C when the ambient temperature is 100°C):

- (1) Ambient temperature of the board: 100°C
- (2) Terminal temperature of the surface mount resistor: 120°C
- (3) Actual power load: 0.05W

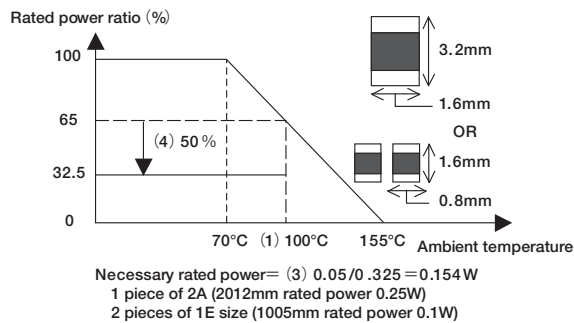


Figure 6. Selection by the traditional derating curve

- (4) Required margin of safety below rating according to designer's internal guidelines: 50%

The required power rating for the resistor using the ambient-temperature derating curve is calculated from conditions (1), (3), and (4). Figure 6 shows this result. For KOA's RK73B resistor series, one piece of 2A size, or two pieces of 1W size will be required.

However, when a resistor is selected using the terminal-temperature derating curve, which is better suited to surface-mount parts, conditions (2), (3), and (4) show that a single 1E (0402) size RK73B resistor would be sufficient.

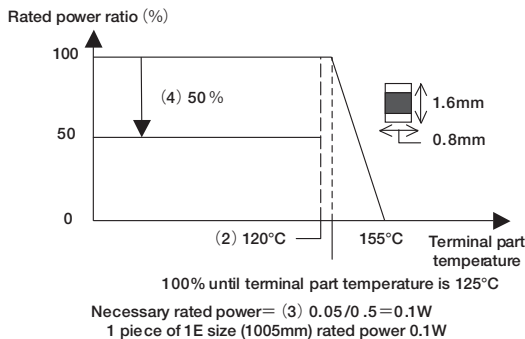


Figure 7. Selection using a terminal-temperature derating curve

As seen above, the number of resistors and the mounting area can be reasonably reduced by using the proper derating curve based on terminal temperature, and this will lead to cost savings.

Type	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.
SG73S 2A	0.25W	70°C	125°C
SG73P 2A	0.5W	—	100°C

Table 1. Rating column of products with 2 rated power

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18

### Derating curve suitable for the surface mount resistor

As shown in Table 1, for the surface mount resistors, there are products that have 2 rated powers for the same type in the rating column. The high rated power is basically available and applicable only to boards with adequate heat dissipation design for example multilayer boards, DCB (direct copper bonding) boards and single layer boards with wide heat dissipation area land. Therefore, the horizontal axis of the derating curve for high rated power is only defined with the terminal part temperature and please be careful that the conventional derating curve defined by the ambient temperature cannot be used in this case. For these products, “-” will be shown in the rated ambient temperature column which means “Not Applicable.”

In addition, we implement load life tests for the products with high rated power by using a test board that can specially control the terminal part temperature.

In the case of Table 1, there will be 3 derating curves as shown from Figure 8 to Figure 10.

How to use each derating curve is shown as the following.

#### When 0.25W is the rated power

When the terminal part temperature can be measured:

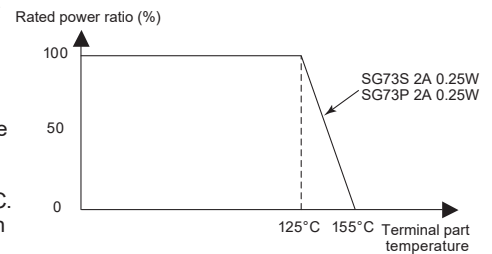


Figure 8. Derating curve of 0.25W rated power based on terminal part temperature

The derating curve in Figure 8 can be applicable and it can be used with rated power 0.25W up to terminal part temperature 125°C.

The derating curve with the horizontal axis based on the terminal part temperature supercedes the conventional derating curve with the horizontal axis based on the ambient temperature. Therefore, even when the ambient temperature exceeds 100°C, it can be used with rated power 0.25W as long as the terminal part temperature is below 125°C.

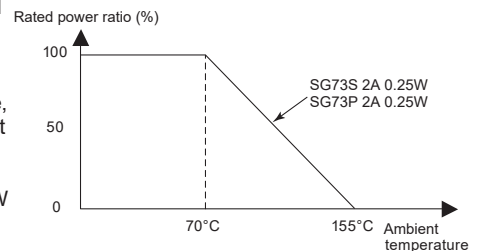


Figure 9. Derating curve of 0.25W rated power based on ambient temperature

When the terminal part temperature is not measured and only the ambient temperature is measured:

The product may be used by derating the load power from the ambient temperature 70°C according to the conventional derating curve shown in Figure 9.

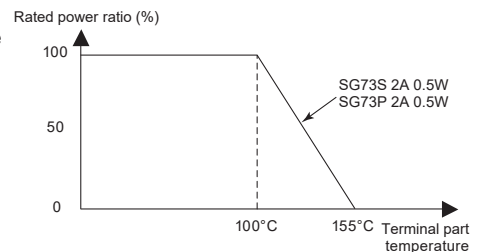


Figure 10. Derating curve of 0.5W rated power based on terminal part temperature

However, as mentioned in the past descriptions, the temperature of the resistor differs according to the wiring patterns and heat generating components nearby, even when the ambient temperature is the same, so it is not a derating method with good precision.

#### When 0.5W is the rated power

Managing the terminal part temperature is the requirement to apply the rated power 0.5W. Only the derating curve with the horizontal axis based on the terminal part temperature as shown in Fig.10 can be used but it can assure up to the high power. The product can be used with 0.5W if the terminal part temperature is below 100°C.

Reference: Please refer to the Technical report of JEITA RCR-2114 Study for the derating curve of fixed surface mount resistors



## Precautions for the Resistors

Refer to the precautions of common matters for all products in the beginning of this catalog.

### General in Fixed Resistors

- For basic precautions of using resistors, refer to the technical report "JEITA RCR-2121B Safety application guide for fixed resistors for use in electronic equipment" issued by JEITA.
- When the resistors are operated in ambient temperature above the rated temperature, the power rating must be derated according to the derating curve.
- Resistors in general may emit flame, fire or smoke when overload is applied.
- Flame retardant resistors may emit smoke or appear red hot when overload is applied but are unlikely to emit flame or fire.
- When the resistors are sealed and coated by coating materials such as resin, deterioration of the resistor by thermal stress or resin may affect the characteristics. Confirm with KOA for the performance and reliability specifications in advance.

When the resin absorbs moisture, the resistance to moisture and corrosion of the resistor may deteriorate, so be aware.

- When the resistor is coated, potted or molded by resin materials, the curing stress could cause peeling of protective coating and cracking of solder fillet, resulting in resistance change and disconnection. Do not coat nor seal the flame retardant coated resistors.
- Allow enough time for cooling after mounting metal film resistors, before washing off the flux. Residues of ionic substances may deteriorate resistances to moisture and corrosion.
- KOA can only guarantee safety when the average power is below the rated power. When power, exceeding the rated power, is applied for a short duration, please contact us with the surge voltage or current waveform for advice.
- Cylindrical film resistors have inductance due to the spiral trimming. Please be aware when using in a high-frequency circuit.
- The flame retardant resistors are weak against mechanical stress compared with the general resistors due to the special coating. Please do not apply impact, vibration or pinching with pliers, tweezers to the resistor body. Do not apply any external force to the protective coating until drying is fully completed after washing.

### Chip Resistor Array and Networks

- Misalignment of the mounting, abnormal solder amount or a loading direction mistake in the flow soldering process could cause a solder bridge to the neighboring terminations.
- Adhesive of ionic residuals on the resistor or board could cause migration between the neighboring terminations.

### Wirewound Type Resistors

- Wirewound type resistors have inductances and parasitic capacitances resulting from the winding structure. Therefore, they could resonate when used in a high frequency circuit.

### Fusing Resistors

- Confirm beforehand that the overload condition of the abnormal situations are within the fusing characteristics.
- Contact KOA in advance when excess overload above the rated voltage is continuously applied, since there is a possibility of damage accumulated in the resistor.
- The arc phenomenon may occur when high voltage is applied again after fusing by over current. Make sure to use the product below the maximum open circuit voltage.
- Contact KOA about the maximum open circuit voltage, it varies depending on the product type and resistance.
- The fusing characteristics could change when the resistors are coated, potted and molded by resin materials.

## Terms and Definitions

### Nominal Resistance

- Designed resistance value usually indicated on the resistor.

### Power Rating

- Maximum allowable power at rated temperature. Some of our chip resistor arrays and networks specify the power rating for the entire package, as opposed to each element.

### Rated Temperature

- Maximum ambient temperature at which the power rating may be applied continuously. The rated ambient temperature refers to the temperature around the resistor mounted inside the equipment, not to the air temperature outside the equipment.

### Derating Curve

- Plot that expresses the relation between ambient temperature and the maximum allowable power, which is generally expressed in percentage.

### Rated Voltage

- Maximum allowable D.C. or A.C. voltage, to be continuously applied to a resistor or a resistor element.

$$\text{Rated Voltage (V)} = \sqrt{\text{Rated Power (W)} \times \text{Nominal Resistance Value } (\Omega)}$$

Rated voltage shall be the calculated value or max. working voltage, whichever is lower.

### Critical Resistance

- The maximum nominal resistance value at which the rated power can be applied without exceeding the maximum working voltage. The rated voltage is equal to the max. working voltage at the critical resistance value.

### Max. Working Voltage


- Maximum D.C. or A.C. voltage that can be continuously applied to the terminations of a resistor. However, the maximum value of the applicable voltage is the rated voltage at the critical resistance value or lower.

### Overload Voltage

- Allowable voltage which is applied for 5 sec. according to the short time overload test. Overload voltage shall be 2.5 times of rated voltage or max. overload voltage, whichever is lower.

### Maximum Overload Voltage

- Largest value of overload voltage

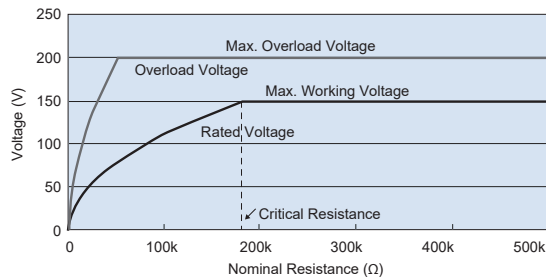

Example of Various Voltage of RK73G 2A

### Dielectric Withstanding Voltage

- A.C. voltage (rms) that can be applied to a designated spot between the electrode and the outer coating for one minute according to the proof test.

### Temperature Coefficient of Resistance (T.C.R.)

- Relative variation of resistance between two given temperatures when temperature is changed by 1K, which is calculated by the following formula.

$$\text{T.C.R. } (\times 10^{-6}/\text{K}) = \frac{R - R_0}{R_0} \times \frac{1}{T - T_0}$$

R : Resistance value (Ω) at T


R<sub>0</sub> : Resistance value (Ω) at T<sub>0</sub>

T : Measured test temperature (°C)


T<sub>0</sub> : Measured base temperature (°C)

## features


- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: 0201 (1H), 0402 (1E), 0603 (1J), 0805 (2A), 1206 (2B), 1210 (2E), 2010 (2H/W2H), 2512 (3A/W3A/W3A2)

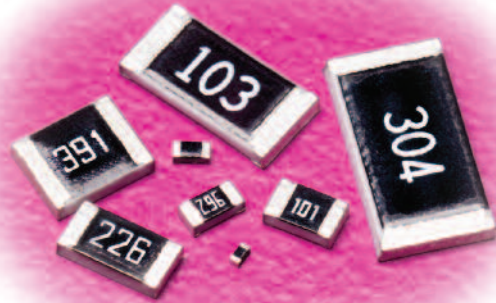


## dimensions and construction

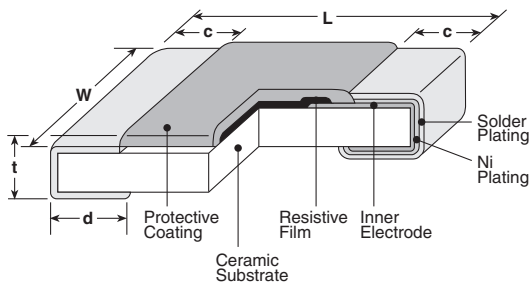

### Derating Curve



For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

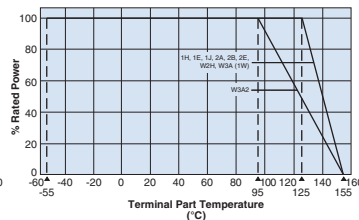

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the above derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

Type* (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1F</b> (01005)	.015±.001 (0.4±0.02)	.007±.001 (0.2±0.02)	.004±.001 (0.10±0.03)	.004±.001 (0.11±0.03)	.005±.001 (0.13±0.02)
<b>1H</b> (0201)	.024±.001 (0.6±0.03)	.012±.001 (0.3±0.03)	.004±.002 (0.1±0.05)	.006±.002 (0.15±0.05)	.009±.001 (0.23±0.03)
<b>1E</b> (0402)	.039 <sup>+0.04</sup> <sub>-.002</sub> (1.0 <sup>+0.1</sup> <sub>-.05</sub> )	.02±.002 (0.5±0.05)	.008±.004 (0.2±0.1)	.01 <sup>+0.02</sup> <sub>-.004</sub> (0.25 <sup>+0.05</sup> <sub>-.1</sub> )	.014±.002 (0.35±0.05)
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-.1</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.016±.008 (0.4±0.2)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.1</sub> )	.024±.004 (0.6±0.1)
<b>2E</b> (1210)		.102±.008 (2.6±0.2)			
<b>2H</b> (2010)	.197±.008 (5.0±0.2)	.098±.008 (2.5±0.2)	.02±.012 (0.5±0.3)	.026±.006 (0.65±0.15)	.024±.004 (0.6±0.1)
<b>W2H</b> (2010)					
<b>3A</b> (2512)	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)	.026±.006 (0.65±0.15)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.1</sub> )	.024±.004 (0.6±0.1)
<b>W3A/W3A2</b> (2512)					

\* Parentheses indicate EIA package size codes.

## ordering information

RK73B	2B	T	TD	102	J
Type	Size	Termination Material	Packaging	Nominal Resistance	Tolerance
	1F 1H 1E 1J 2A 2B 2E 2H W2H W3A 2H 3A W3A2	T: Sn (1F ~ W3A2) Contact factory for below options: L: SnPb (1E, 1J, 2A, 2B, 2E, 2H, 3A) G: Au (1E ~ 2A: 10Ω ~ 1MΩ)	TX: 01005 only: 4mm width - 1mm pitch plastic embossed TBL: 01005 only: 2mm pitch pressed paper TC: 0201 only: 7" 2mm pitch pressed paper (TC: 10,000 pcs/reel, TCM: 15,000 pcs/reel) TCD: 0201 only: 10" 2mm pitch pressed paper TPD: 0402 only: 10" 2mm pitch plastic embossed TPL: 0402 only: 2mm pitch punched paper TP: 0402, 0603 & 0805: 7" 2mm pitch punched paper TD: 0603, 0805, 1206 & 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206 & 1210: 10" paper tape TE: 0805, 1206, 1210, 2010 & 2512: 7" plastic embossed TED: 0805, 1206, 1210, 2010 & 2512: 10" plastic embossed For further information on packaging, please refer to Appendix A	2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω	G: ±2% J: ±5%

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

2/04/19

## general purpose 2%, 5% tolerance thick film chip resistor

### applications and ratings

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (x10 <sup>-6</sup> /K)	Resistance Range		Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range															
					G±2% E-24	J±5% E-24																		
RK73B1F (01005)	0.03W	70°C	—	±200	100kΩ - 1MΩ	100kΩ - 10MΩ	20V	30V	-55°C to +125°C															
				±250	10Ω - 91kΩ	10Ω - 91kΩ																		
				0~+300	1Ω - 9.1Ω	1Ω - 9.1Ω																		
RK73B1H (0201)	0.05W		70°C	125°C	±200	10Ω - 10MΩ	10Ω - 10MΩ	25V		50V	-55°C to +155°C													
					±400	—	1Ω - 9.1Ω																	
RK73B1E (0402)	0.1W				70°C	125°C	±200	1Ω - 10MΩ		1Ω - 10MΩ		75V	100V	-55°C to +155°C										
							±400	—		11MΩ - 22MΩ														
RK73B1J (0603)	0.1W						70°C	125°C		±200		1.1kΩ - 1MΩ	1.1kΩ - 10MΩ		75V	100V	-55°C to +155°C							
										±400		—	11MΩ - 22MΩ											
RK73B2A (0805)	0.25W									70°C		125°C	±200		1Ω - 1kΩ	1Ω - 1kΩ		150V	200V	-55°C to +155°C				
													±400		—	6.2MΩ - 22MΩ								
RK73B2B (1206)	0.25W												70°C		125°C	±200		1Ω - 1MΩ	1Ω - 1MΩ		200V	400V	-55°C to +155°C	
		±400							—							6.2MΩ - 22MΩ								
RK73B2E (1210)	0.50W	70°C							125°C							±200		1Ω - 5.6MΩ	1Ω - 5.6MΩ		200V	400V		-55°C to +155°C
																±400		—	6.2MΩ - 10MΩ					
RK73BW2H/2H (2010)	0.75W		70°C	125°C							±200					10Ω - 5.6MΩ		1Ω - 5.6MΩ	200V		400V	-55°C to +155°C		
											±400					—		6.2MΩ - 22MΩ						
RK73BW3A/3A (2512)	1.0W				70°C	125°C					±200			10Ω - 5.6MΩ		1Ω - 5.6MΩ		200V	400V		-55°C to +155°C			
											±400			—		6.2MΩ - 22MΩ								
RK73BW3A2 (2512)	2.0W						70°C	125°C			±200			10Ω - 5.6MΩ		1Ω - 5.6MΩ	200V	400V	-55°C to +155°C					
											±400			—		6.2MΩ - 22MΩ								

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

If any questions arise on whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature" in your usage conditions, please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details, refer to "Introduction of the derating curves based on the terminal part temperature" in the beginning of our catalog. Temperature rise at high power will depend on PCB layout. Be sure to contact factory prior to use and monitor terminal part temperature.

## environmental applications

### Performance Characteristics

Parameter	Requirement $\Delta R$ (%+0.1Ω)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±1%: 1F ±0.5%: Another	Rated Voltage x 2.5 for 5 seconds (1E, 2B, W3A2: Rated Voltage x 2 for 5 seconds)
Resistance to Soldering Heat	±1%: 1F-W3A2 (10Ω≤R≤1MΩ) ±3%: 1F-W3A2 (R<10Ω, R>1MΩ)	±0.5%: 1F-W3A2 (10Ω≤R≤1MΩ); ±1%: 1F-W3A2 (R<10Ω, R>1MΩ)	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1%: 1F ±0.5%: Another	±0.5%: 1F ±0.3%: Another	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%: 1J, 2A, 2B ±3%: Another	±0.75%: 1J, 2A, 2B ±1.5%: 1F ±1%: Another	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%: 1J, 2A, 2B ±3%: Another	±0.75%: 1J, 2A, 2B ±1%: Another	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.5%: 1F ±0.3%: Another	+125°C, 1000 hours: 1F; +155°C, 1000 hours: 1E, 1H, 1J, 2A, 2B, 2E, 2H/W2H, 3A/W3A/W3A2

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


2/04/19




## features

- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: 0201 (1H), 0402 (1E), 0603 (1J), 0805 (2A), 1206 (2B), 1210 (2E), 2010 (2H/W2H), 2512 (3A/W3A/W3A2)


## dimensions and construction

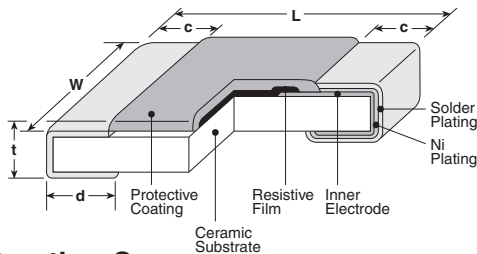

## Derating Curve



For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

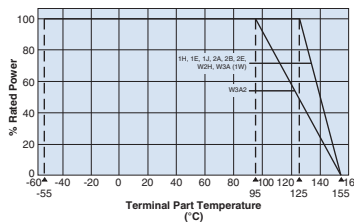

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the above derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

Type* (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1F</b> (01005)	.016±.0008 (0.4±0.02)	.008±.0008 (0.2±0.02)	.004±.001 (0.1±0.03)	.004±.001 (0.11±0.03)	.005±.0008 (0.13±0.02)
<b>1H</b> (0201)	.024±.001 (0.6±0.03)	.012±.001 (0.3±0.03)	.004±.002 (0.1±0.05)	.006±.002 (0.15±0.05)	.009±.001 (0.23±0.03)
<b>1E</b> (0402)	.039 <sup>+0.04</sup> <sub>-.002</sub> (1.0 <sup>+0.1</sup> <sub>-.05</sub> )	.02±.002 (0.5±0.05)	.008±.004 (0.2±0.1)	.01 <sup>+0.02</sup> <sub>-.004</sub> (0.25 <sup>+0.05</sup> <sub>-.01</sub> )	.014±.002 (0.35±0.05)
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-.01</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)
<b>2E</b> (1210)		.102±.008 (2.6±0.2)			
<b>2H</b> (2010)	.197±.008 (5.0±0.2)	.098±.008 (2.5±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)
<b>W2H</b> (2010)					
<b>3A</b> (2512)	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)			
<b>W3A/W3A2</b> (2512)				.026±.006 (0.65±0.15)	

\* Parentheses indicate EIA package size codes.

## ordering information

RK73H	2B	T	TD	1003	F
Type	Size	Termination Material	Packaging	Nominal Resistance	Tolerance
	1F 1H 1E 1J 2A 2B 2E W2H W3A 2H 3A W3A2	T: Sn (1F ~ W3A2) Contact factory for below options: L: SnPb (1E, 1J, 2A, 2B, 2E, 2H, 3A) G: Au (1E ~ 2A: 10Ω ~ 1MΩ)	TX: 01005 only: 4mm width - 1mm pitch plastic embossed TBL: 01005 only: 2mm pitch pressed paper TC: 0201 only: 7" 2mm pitch pressed paper (TC: 10,000 pcs/reel, TCM: 15,000 pcs/reel) TCD: 0201 only: 10" 2mm pitch pressed paper TPD: 0402 only: 10" 2mm pitch plastic embossed TPL: 0402 only: 2mm pitch punch paper TP: 0402, 0603, 0805: 7" 2mm pitch punch paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210, 2010 & 2512: 7" embossed plastic TED: 0805, 1206, 1210, 2010 & 2512: 10" embossed plastic For further information on packaging, please refer to Appendix A	3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	D: ±0.5% F: ±1%



KOA SPEER ELECTRONICS, INC.

applications and ratings

RK73H

precision 0.5%, 1% tolerance  
thick film chip resistor

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (x10 <sup>-6</sup> /K)	Resistance Range		Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
					D±0.5% E-24, E-96	F±1% E-24, E-96*			
RK73H1F (01005)	0.03W	70°C	—	±200	—	100kΩ - 2MΩ*	20V	30V	-55°C to +125°C
				±250	—	10Ω - 91kΩ*			
RK73H1H (0201)	0.05W	70°C	—	±200	10Ω - 1MΩ	10Ω - 10MΩ*	25V	50V	-55°C to +125°C
				±400	—	1.0Ω - 9.1Ω*			
RK73H1E (0402)	0.1W	70°C	—	±100	10Ω - 1MΩ	10Ω - 1MΩ	75V	100V	-55°C to +125°C
				±200	—	1.0Ω - 9.76Ω 1.02MΩ - 10MΩ			
RK73H1J (0603)	0.1W	70°C	—	±100	1.02kΩ - 1MΩ	1.02kΩ - 1MΩ	75V	100V	-55°C to +125°C
				±200	—	1.02MΩ - 10MΩ			
	0.125W			±100	10Ω - 1kΩ	10Ω - 1kΩ	75V		
				±200	—	1.0Ω - 9.76Ω			
RK73H2A (0805)	0.25W	70°C	—	±100	10Ω - 1MΩ	10Ω - 1MΩ	150V	200V	-55°C to +125°C
				±200	—	1.0Ω - 9.76Ω			
				±400	—	1.02MΩ - 10MΩ			
RK73H2B (1206)	0.25W	125°C	—	±100	10Ω - 1MΩ	10Ω - 1MΩ	200V	400V	-55°C to +155°C
				±200	—	1.0Ω - 9.76Ω 1.02MΩ - 5.6MΩ			
				±400	—	5.62MΩ - 10MΩ			
RK73H2E (1210)	0.5W	125°C	—	±100	10Ω - 1MΩ	10Ω - 1MΩ	200V	400V	-55°C to +155°C
				±200	—	1.0Ω - 9.76Ω 1.02MΩ - 5.6MΩ			
				±400	—	5.62MΩ - 10MΩ			
RK73HW2H/2H (2010)	0.75W	125°C	—	±100	10Ω - 1MΩ	10Ω - 1MΩ	200V	400V	-55°C to +155°C
				±200	—	1.0Ω - 9.76Ω 1.02MΩ - 5.6MΩ			
				±400	—	5.62MΩ - 10MΩ			
RK73HW3A/3A (2512)	1.0W	125°C	—	±100	10Ω - 1MΩ	10Ω - 1MΩ	200V	400V	-55°C to +155°C
				±200	—	1.0Ω - 9.76Ω 1.02MΩ - 5.6MΩ			
				±400	—	5.62MΩ - 10MΩ			
RK73HW3A2 (2512)	2.0W	—	95°C	±100	10Ω - 1MΩ	10Ω - 1MΩ	200V	400V	-55°C to +155°C
				±200	—	1.0Ω - 9.76Ω 1.02MΩ - 5.6MΩ			
				±400	—	5.62MΩ - 10MΩ			

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

\* 1F: E-24, 1H: 1.0~9.1, 1M~10MΩ: E-24. If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves based on the terminal part temperature" in the beginning of the catalog. While using under high power, the temperature of the product may increase depending on the condition of heat dissipation from PCB. Be sure to check the terminal part temperature as well as precautions to use on delivery specification before use.

## environmental applications

### Performance Characteristics

Parameter	Requirement $\Delta R$ (%+0.1Ω)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±1%: 1F ±0.5%: Another	Rated Voltage x 2.5 for 5 seconds (1E, 2B, W3A2: Rated Voltage x 2 for 5 seconds)
Resistance to Soldering Heat	±1%: 1F ~ W3A2 (10Ω ≤ R ≤ 1MΩ); ±3%: 1H ~ W3A2 (R < 10Ω, R > 1MΩ)	±0.5%: 1F ~ W3A2 (10Ω < R < 1MΩ); ±1%: 1H ~ W3A2 (R < 10Ω, R > 1MΩ)	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1%: 1F; ±0.5%: Another	±0.5%: 1F; ±0.3%: Another	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%: 1J, 2A, 2B ±3%: Another	±0.75%: 1J, 2A, 2B; ±1.5%: 1F, ±1%: Another	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%: 1J, 2A, 2B; ±3%: Another	±0.75%: 1J, 2A, 2B; ±1%: Another	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.5%: 1F ±0.3%: Another	+125°C, 1000 hours: 1F; +155°C, 1000 hours: 1E, 1H, 1J, 2A, 2B, 2E, 2H/W2H, 3A/W3A/W3A2


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

2/04/19

### features

- Silver element
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: 0201(1H), 0402(1E), 0603(1J), 0805(2A), 1206(2B), 1210(2E), 2010(2H/W2H), 2512(3A/W3A)

### dimensions and construction

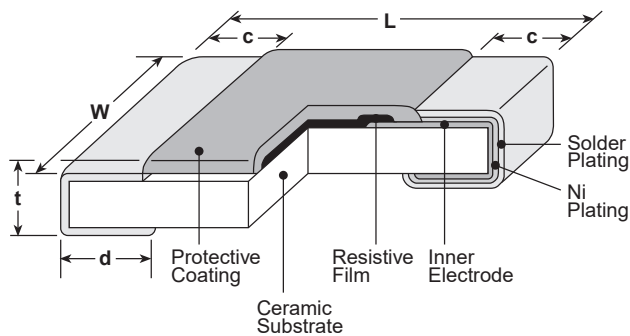

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1F</b> (01005)	.016±.0008 (0.4±0.02)	.008±.0008 (0.2±0.02)	.004±.001 (0.10±0.03)	.004±.001 (0.11±0.03)	.005±.0008 (0.13±0.02)
<b>1H</b> (0201)	.024±.001 (0.6±0.03)	.012±.001 (0.3±0.03)	.004±.002 (0.1±0.05)	.006±.002 (0.15±0.05)	.009±.001 (0.23±0.03)
<b>1E</b> (0402)	.039 <sup>+0.004</sup> <sub>-.002</sub> (1.0 <sup>+0.1</sup> <sub>-.05</sub> )	.02±.002 (0.5±0.05)	.008±.004 (0.2±0.1)	.01 <sup>+0.002</sup> <sub>-.004</sub> (0.25 <sup>+0.05</sup> <sub>-.1</sub> )	.014±.002 (0.35±0.05)
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-.1</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.1</sub> )	.024±.004 (0.6±0.1)
<b>2E</b> (1210)		.102±.008 (2.6±0.2)			
<b>2H</b> (2010)		.098±.008 (2.5±0.2)			
<b>W2H</b> (2010)	.197±.008 (5.0±0.2)	.098±.008 (2.5±0.2)			
<b>3A</b> (2512)	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)		.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.1</sub> )	
<b>W3A</b> (2512)				.026±.006 (0.65±0.15)	

### ordering information

RK73Z	2B	T	TD
Type	Size	Termination Material	Packaging
	1F 1H 1E 1J 2A 2B 2E W2H W3A 2H 3A	T: Sn (1F, 1H, 1E, 1J, 2A, 2B, 2E, 2H/W2H, 3A/W3A) Contact factory for below options: L: SnPb (1E, 1J, 2A, 2B, 2E, 2H, 3A only) G: Au (1E, 1J, 2A)	TX: 01005 only: 4mm width - 1mm pitch embossed plastic TBL: 01005 only: 2mm pitch pressed paper TC: 0201 only: 7" 2mm pitch pressed paper (TC: 10,000 pcs/reel, TCM: 15,000 pcs/reel) TCD: 0201 only: 10" 2mm pitch pressed paper TPL: 0402 only: 2mm pitch punch paper TP: 0402, 0603, 0805: 7" 2mm pitch punch paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210, 2010 & 2512: 7" embossed plastic TED: 0805, 1206, 1210, 2010 & 2512: 10" embossed plastic For further information on packaging, please refer to Appendix A

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/01/18




## applications and ratings


Part Designation	Rated Ambient Temperature	Rated Terminal Part Temperature	Maximum Continuous Current @ 70°C	Maximum Overload Current @ 70°C (for < 1 second)	Maximum Resistance	Operating Temperature Range
RK73Z1F	70°C	—	0.5 Amps	1.0 Amp Max.	50mΩ	-55°C to +125°C
RK73Z1H		125°C	0.5 Amps	1.0 Amp Max.		-55°C to +155°C
RK73Z1E RK73Z1J			1.0 Amps	2 Amp Max.		
RK73Z2A			2.0 Amps	5 Amp Max.		
RK73Z2B RK73Z2E RK73Z2H/W2H RK73Z3A/W3A			2.0 Amps	10 Amp Max.		

## environmental applications

### Derating Curve

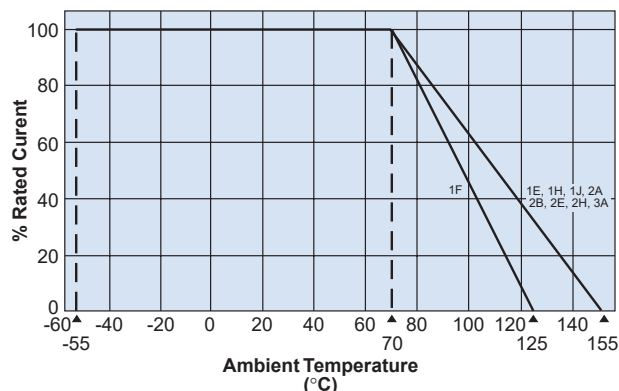

For resistors operated at an ambient temperature of 70°C or above, a current rating shall be derated in accordance with the above derating curve.

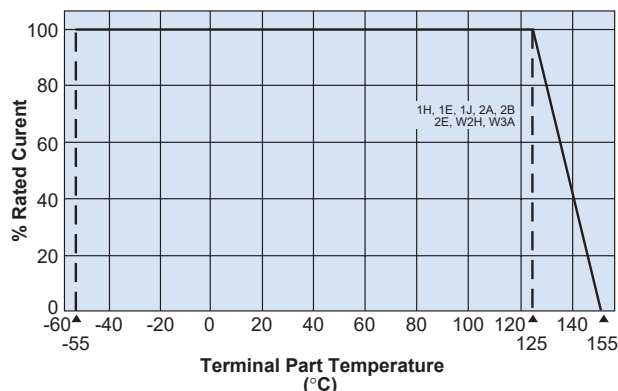

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.


## Performance Characteristics

Parameter	Requirement		Test Method
	Limit	Typical	
Resistance	50mΩ Max. after the test	15mΩ Max. after the test	25°C
Overload (Short time)	50mΩ Max. after the test	18mΩ Max. after the test	Maximum overload current for 5 seconds , 1 cycle
Resistance to Solder Heat	50mΩ Max. after the test	15mΩ Max. after the test	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	50mΩ Max. after the test	15mΩ Max. after the test	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	100mΩ Max. after the test	18mΩ Max. after the test	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	100mΩ Max. after the test	18mΩ Max. after the test	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	100mΩ Max. after the test	15mΩ Max. after the test	+125°C, 1000 hours: 1F +155°C, 1000 hours: 1H, 1E, 1J, 2A, 2B, 2E, W2H/2H, W3A/3A

## features

- High precision resistor with T.C.R. of  $\pm 50$  ppm/°C and tolerance of  $\pm 0.25\%$ ,  $\pm 0.5\%$  or  $\pm 1\%$
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

## dimensions and construction

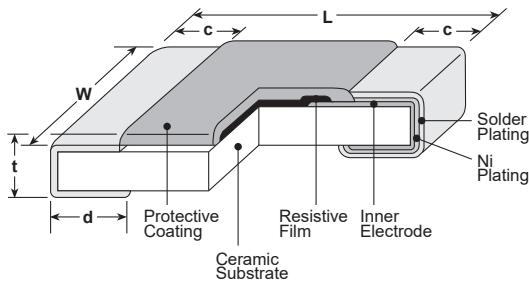

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1H</b> (0201)	.024±.001 (0.6±0.03)	.012±.001 (0.3±0.03)	.004±.002 (0.1±0.05)	.006±.002 (0.15±0.05)	.009±.001 (0.23±0.03)
<b>1E</b> (0402)	.039 <sup>+0.004</sup> <sub>-.002</sub> (1.0 <sup>+0.1</sup> <sub>-0.05</sub> )	.02±.002 (0.5±0.05)	.008±.004 (0.2±0.1)	.01 <sup>+0.002</sup> <sub>-.004</sub> (0.25 <sup>+0.05</sup> <sub>-0.1</sub> )	.014±.002 (0.35±0.05)
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)

## ordering information

RK73G	1J	T	TD	1003	F
Type	Size	Termination Material	Packaging	Nominal Resistance	Tolerance
	1H 1E 1J 2A 2B	T: Sn (1H, 1E, 1J, 2A, 2B) L: SnPb (1E, 1J, 2A, 2B)	TC: 0201 only: 7" 2mm pitch pressed paper (TC: 10,000 pcs/reel, TCM: 15,000 pcs/reel) TPL: 0402 only: 2mm pitch punch paper TP: 0402, 0603, 0805: 7" 2mm pitch punch paper TD: 0603, 0805, 1206: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206: 10" paper tape TE: 0805, 1206: 7" embossed plastic TED: 0805, 1206: 10" embossed plastic For further information on packaging, please refer to Appendix A	3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	<b>New C:</b> $\pm 0.25\%$ D: $\pm 0.5\%$ F: $\pm 1\%$

## applications and ratings


Part Designation*	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range			Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage
					New E-24, E-96 (C±0.25%)	E-24, E-96 (D±0.5%)	E-24, E-96 (F±1%)		
RK73G1H (0201)	1/20W (.05W)	70°C	125°C	±50	—	100Ω - 1MΩ**	100Ω - 1MΩ**	25V	50V
RK73G1E (0402)	1/10W (.10W)				—	—	—	50V	100V
RK73G1J (0603)	1/10W (.10W)				100Ω - 1MΩ	10Ω - 1MΩ	10Ω - 1MΩ	75V	150V
RK73G2A (0805)	1/8W (.125W)				150V	200V			
RK73G2B (1206)	1/4W (.25W)				200V	400V			

Operating Temperature Range: -55°C ~ +155°C


\* Parentheses indicate EIA package size codes.

\*\* RK73G1H available in E-24 decade values only

## Derating Curve

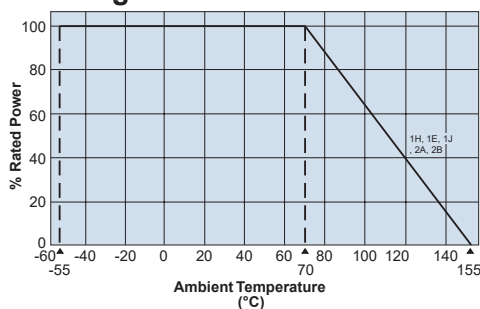

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

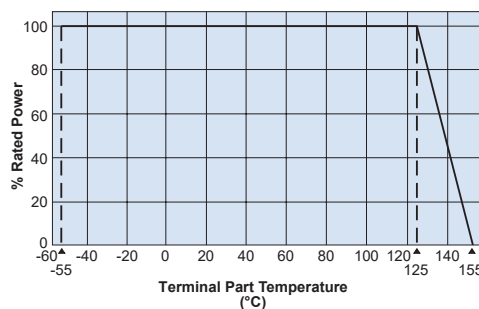

For resistors operated terminal part temperature of described for each size or above, a power rating shall be derated in accordance with derating curve. Please refer to "Introduction of the derating curves based on the terminal part temperature" in the beginning of our catalog before use.

## environmental applications

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	1H: +25°C/+125°C, 1E, 1J, 2A, 2B: +25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.6%	Rated Voltage x 2.5 for 5 seconds (1E, 2B: Rated Voltage x 2 for 5 seconds)
Resistance to Solder Heat	±1%	±1%: 1H, ±0.4%: 1E, 1J, 2A, 2B	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%: 1J, 2A, 2B ±3%: 1H, 1E	±0.6%: 1J, 2A, 2B; ±1%: 1H, 1E	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%: 1J, 2A, 2B ±3%: 1H, 1E	±0.6%: 1J, 2A, 2B; ±1%: 1H, 1E	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.6%	+155°C, 1000 hours

For Surface Temperature Rise Graph see Environmental Applications. Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/01/18






## features

- Metal-glaze thick film resistor for surface mounting
- High precision resistor with T.C.R.  $\pm 25 \times 10^{-6}/K$  and tolerance  $\pm 0.25\%$
- Suitable for both flow and reflow solderings
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

## dimensions and construction

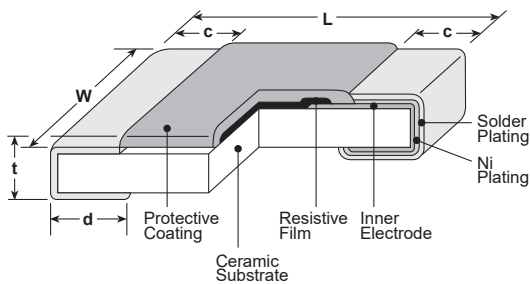

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>NEW 2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-.01</sub> )	.020±.004 (0.5±0.1)

## ordering information

<b>RK73F</b>	<b>1J</b>	<b>T</b>	<b>TD</b>	<b>1002</b>	<b>D</b>
Type	Size	Termination Material	Packaging	Nominal Resistance	Tolerance
	1J: 0.1W New 2A: 0.25W	T: Sn	TD: 7" 4mm pitch punched paper For further information on packaging, please refer to Appendix A	3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	C: ±0.25% D: ±0.5%

## applications and ratings

Part Designation	Power Rating	Rated Ambient Temperature	Rated Ambient Part Temp.	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range		Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
					C±0.25% E-24, E-96	D±0.5% E-24, E-96			
RK73F1J (0603)	1/10W (.10W)	70°C	125°C	±25*	10Ω - 1MΩ	10Ω - 1MΩ	75V	150V	-55°C to +155°C
<b>NEW</b> RK73F2A (0805)	1/4W (.25W)	70°C	125°C	±25*	10Ω - 1MΩ	10Ω - 1MΩ	150V	200V	-55°C to +155°C

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower


\* Measurement Temperature: +25°C/+125°C. Cold T.C.R. (-55°C/+25°C) is -50 ~ +25x10<sup>-6</sup>/K

If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature" in your usage conditions, please give priority to the "Rated Terminal Part Temperature."


Prior to use and for more details, please refer to the "Introduction of the derating curves based on the terminal part temperature" in the beginning of our catalog.

## environmental applications

### Derating Curve

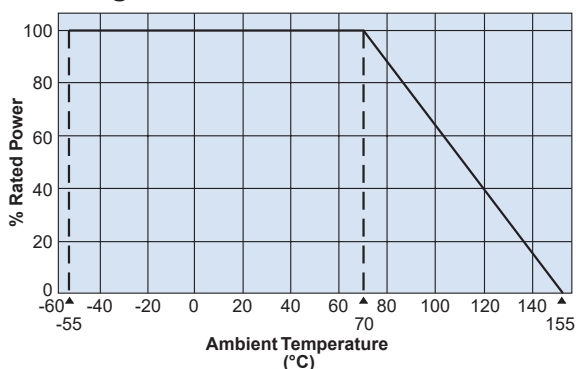

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

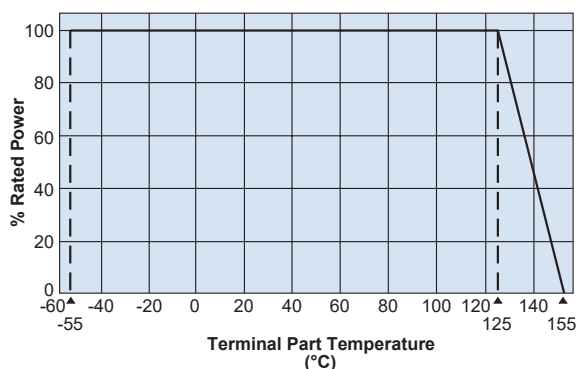

For resistors operated terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curves based on the terminal part temperature" on the beginning of our catalog before use.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.6%	Rated Voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1%	±0.4%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±0.6%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.6%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.6%	+155°C, 1000 hours

For Surface Temperature Rise Graph see Environmental Applications. Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/05/18


**NEW**

**features**




- Metal-glaze thick film resistor for surface mounting
- High precision resistor with T.C.R.  $\pm 25 \times 10^{-6}/K$  and tolerance  $\pm 0.1\%$
- High reliability with  $\Delta R$  of  $\pm 0.2\%$  and  $\pm 0.4\%$  in the reliability test
- Suitable for both flow and reflow solderings
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

**dimensions and construction**

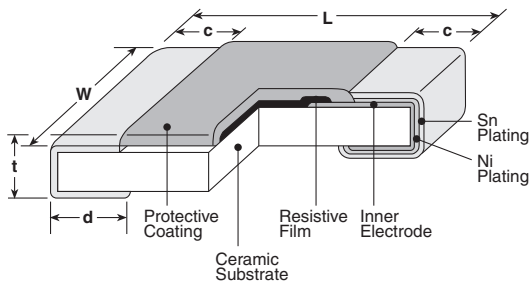


Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1J (0603)</b>	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.008±.004 (0.2±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)

**Derating Curve**

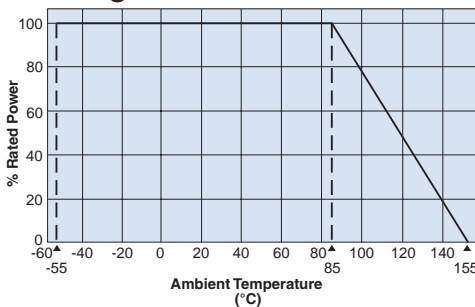

For resistors operated at an ambient temperature of 85°C or above, a power rating shall be derated in accordance with the derating curve.

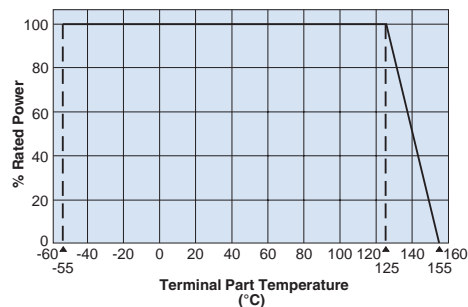

For resistors operated terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

**ordering information**

<b>RS73F</b>	<b>1J</b>	<b>T</b>	<b>TD</b>	<b>1002</b>	<b>B</b>
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
RS73F RS73G	1J: 0.2W	T: Sn	TD: 4mm pitch punched paper For further information on packaging, please refer to Appendix A	4 digits	B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$ F: $\pm 1\%$

## applications and ratings

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range*2				Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
					B±0.1% E-24, E-96	C±0.25% E-24, E-96	D±0.5% E-24, E-96	F±1% E-24, E-96			
RS73F1J (0603)	.2W	85°C	125°C	±25*1	100Ω - 1MΩ	100Ω - 1MΩ	100Ω - 1MΩ	100Ω - 1MΩ	100V	150V	-55°C to +155°C
RS73G1J (0603)				±50							

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

\*1 Measurement Temperature: +25°C/+125°C. Cold T.C.R. (-55°C/+25°C) is -50~+25x10<sup>-6</sup>/K

\*2 Please inquire about E-192

If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves in the terminal part temperature" in the beginning of the catalog.

## environmental applications

### Performance Characteristics


Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±0.2%	±0.03%	Rated Voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±0.2%	±0.1%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.2%	±0.05%	-55°C (30 minutes), +125°C (30 minutes), 1000 cycles
Moisture Resistance	±0.2%: (100Ω≤R≤200kΩ) ±0.4%: (200kΩ<R≤1MΩ)	±0.04%: (100Ω≤R≤200kΩ) ±0.08%: (200kΩ<R≤1MΩ)	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 85°C	±0.2%	±0.05%	85°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±0.2%: (100Ω≤R≤200kΩ) ±0.4%: (200kΩ<R≤1MΩ)	±0.1%: (100Ω≤R≤200kΩ) ±0.2%: (200kΩ<R≤1MΩ)	+155°C, 1000 hours



## features


- High precision type  $\pm 0.05\%$  is available with standard products
- Improved moisture resistance by glass passivation layer
- High reliability and high stability at elevated temperatures
- Low current noise
- Products with lead-free terminations meet EU RoHS requirements
- Rated ambient temperature: 85°C, rated up to +155°C
- AEC-Q200 Qualified: 0402 (1E), 0603 (1J), 0805 (2A), 1206 (2B), 1210 (2E)

## dimensions and construction

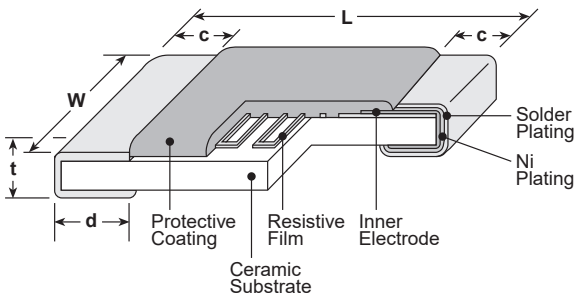


Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1E</b> (0402)	.039 <sup>+0.004</sup> <sub>-.002</sub> (1.0 <sup>+0.1</sup> <sub>-.05</sub> )	.020±.002 (0.5±0.05)	.010±.004 (0.25±0.1)	.010 <sup>+0.002</sup> <sub>-.004</sub> (0.25 <sup>+0.05</sup> <sub>-.01</sub> )	.014±.002 (0.35±0.05)
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.008 (1.25±0.2)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-.01</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)
<b>2E</b> (1210)		.098±.008 (2.5±0.2)			

## Derating Curve

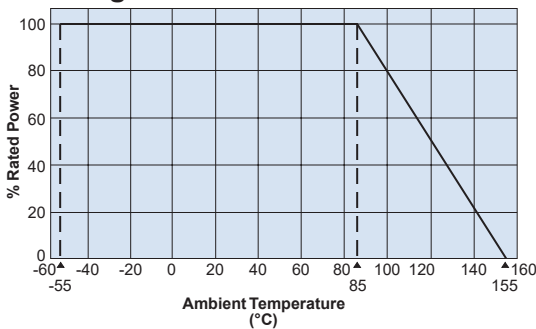

For resistors operated at an ambient temperature of 85°C or above, a power rating shall be derated in accordance with the above derating curve.

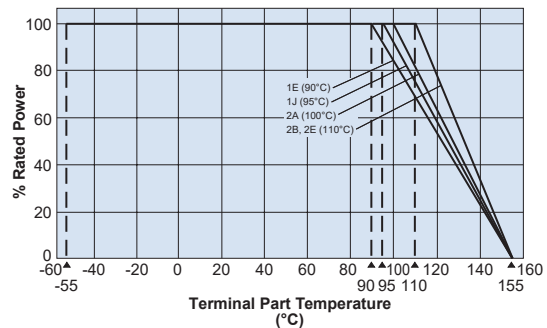

For resistors operated terminal part temperature of described for each size or above, a power rating shall be derated in accordance with derating curve. Please refer to "Introduction of the derating curves based on the terminal part temperature" in the beginning of our catalog before use.

## ordering information

RN73H	2B	T	TD	1002	B	25
Type	Size	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance	T.C.R. (ppm/°C)
	1E: 0.063W 1J: 0.1W 2A: 0.125W 2B: 0.25W 2E: 0.25W	T: Sn G: Au (1E, 1J only)	TP: 0402 only: 7" 2mm pitch punched paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210: 7" embossed plastic TED: 0805, 1206, 1210: 10" embossed plastic For further information on packaging, please refer to Appendix A	3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	A: $\pm 0.05\%$ B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$ F: $\pm 1.0\%$	05 10 25 50 100

**metal film chip resistor**  
**(for automotive, high reliability)**
**applications and ratings**

Part Designation	Power Rating @ 85°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range (Ω) E-24, E-96, E-192*					Maximum Working Voltage	Maximum Overload Voltage
					(A±0.05%)	(B±0.1%)	(C±0.25%)	(D±0.5%)	(F±1.0%)		
RN73H1E	1/16W (.063W)	85°C	90°C	±10	—	47 - 100k	47 - 100k	47 - 100k	47 - 100k	50V	100V
				±25	—	47 - 300k	47 - 300k	47 - 300k	47 - 300k		
				±50	—	47 - 300k	47 - 300k	10 - 300k	10 - 300k		
RN73H1J	1/10W (.10W)	85°C	95°C	±5	100 - 59k	100 - 59k	—	—	—	75V	150V
				±10	47 - 59k	47 - 360k	47 - 360k	47 - 360k	47 - 360k		
				±25	47 - 59k	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
				±50	—	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
RN73H2A	1/8W (.125W)	85°C	100°C	±5	100 - 100k	100 - 100k	—	—	—	150V	300V
				±10	47 - 100k	47 - 1M	47 - 1M	47 - 1M	47 - 1M		
				±25	47 - 100k	15 - 1.5M	15 - 1.5M	10 - 1.5M	10 - 1.5M		
				±50	—	15 - 1.5M	15 - 1.5M	10 - 1.5M	10 - 1.5M		
RN73H2B	1/4W (.25W)	85°C	110°C	±5	100 - 300k	100 - 300k	—	—	—	200V	400V
				±10	47 - 300k	47 - 1M	47 - 1M	47 - 1M	47 - 1M		
				±25	47 - 300k	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
				±50	—	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
RN73H2E	1/4W (.25W)	85°C	110°C	±10	100 - 510k	100 - 510k	100 - 510k	100 - 510k	100 - 510k	200V	400V
				±25	51 - 510k	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
				±50	—	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
				±100	—	—	—	10 - 1M	10 - 1M		

\* No marking on E-192 values

Operating Temperature: -55°C to +155°C

**environmental applications**
**Performance Characteristics**

Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C: T.C.R. +5 (x10 <sup>-6</sup> K); +15°C/-55°C and +25°C/+155°C: other
Overload (Short time)	±0.05%	±0.01%	Rated Voltage x 2.5 or Max. overload voltage, whichever is less for 5 seconds
Resistance to Solder Heat	±0.05%*	±0.01%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.1%*	±0.02%	1E, 1J, 2A: -55°C (30 minutes), +155°C (30 minutes), 1000 cycles 2B, 2E: -55°C (30 minutes), +155°C (30 minutes), 500 cycles
Moisture Resistance	±0.1%*	±0.05%	85°C ± 2°C, 85%±5%RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 85°C	±0.1%*	±0.03%	85°C ± 2°C, 3000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±0.1%*	±0.05%	+155°C, 1000 hours

\* Depends on resistance value, please contact KOA Speer for details.

**Precautions for Use**


- The properly and electrostatically measured taping materials are used for the components, but attention should be paid to the fact that there is some danger the parts absorb on the top tapes to cause a failure in the mounting and the parts are destructed by static electricity (1J, 2A, 2B, 2E: 1kV and more, 1E: 0.5kV and more at Human Body Model 100pF, 1.5kΩ) to change the resistance in the conditions of an excessive dryness or after the parts are given vibration for a long time as they are packaged on the tapes. Similarly, care should be given not to apply the excessive static electricity when mounting on the boards.
- Ionic impurities such as flux etc. that are attached to these products or those mounted onto a PCB, negatively affect their moisture resistance, corrosion resistance, etc. The flux may contain ionic substances like chlorine, acid, etc. while perspiration and saliva include ionic impurities like sodium (Na<sup>+</sup>), chlorine (Cl<sup>-</sup>) etc. Therefore these kinds of ionic substances may induce electrical corrosion when they invade into the products. Either thorough washing or using RMA solder and flux are necessary since lead free solder contains ionic substances. Washing process is needed, before putting on moisture proof material in order to prevent electrical corrosion.
- The upper electrodes could be peeled off when a heat-resistant masking tape is attached to the mounted chip resistors and then detached from them. It is confirmed that the adhesiveness gets stronger due to the exposure to heat under mounting. Accordingly, we recommend the use of masking tape be refrained. If the use of heat-resistant masking tape is unavoidable, please make sure that the adhesives on the tape do not directly come in contact with the product.
- When high-pressure shower cleaning is implemented, there is a possibility of exfoliation of the top electrodes caused by the water pressure stress so please avoid the implementation.
- If the implementation is unavoidable, then please evaluate the products beforehand.

For Surface Temperature Rise Graph see Environmental Applications. Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/06/18

**NEW**

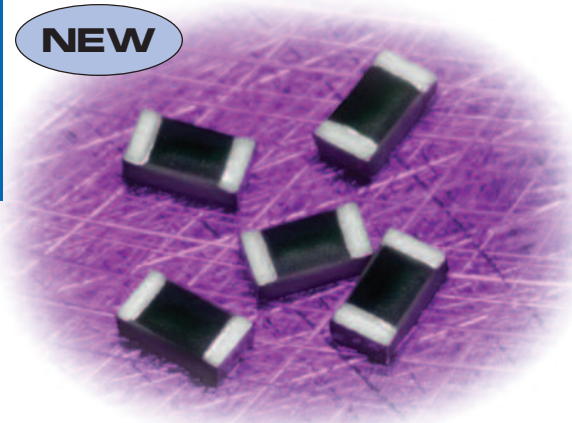


### features

- SMD metal film resistors
- High precision type  $\pm 0.05\%$  is also available as standard
- High performance T.C.R.  $\pm 5 \times 10^{-6}/K$  is also available as standard
- Low current noise
- Improved moisture resistance by high humidity protective coating
- Suitable for control circuits in various industrial equipment
- Suitable for both flow and reflow solderings
- Products meet EU-RoHS requirements




### dimensions and construction

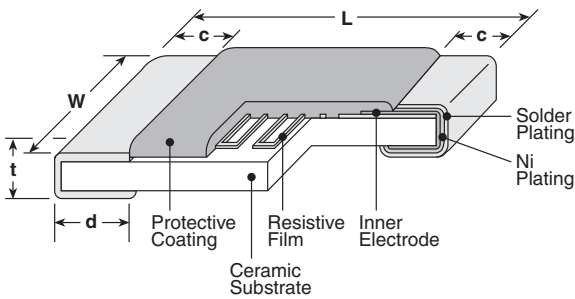


Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1E</b> (0402)	.039 <sup>+0.004</sup> <sub>-.002</sub> (1.0 <sup>+0.1</sup> <sub>-.05</sub> )	.020 $\pm$ .002 (0.5 $\pm$ 0.05)	.010 $\pm$ .004 (0.25 $\pm$ 0.1)	.010 <sup>+0.002</sup> <sub>-.004</sub> (0.25 <sup>+0.05</sup> <sub>-.1</sub> )	.014 $\pm$ .002 (0.35 $\pm$ 0.05)
<b>1J</b> (0603)	.063 $\pm$ .008 (1.6 $\pm$ 0.2)	.031 $\pm$ .004 (0.8 $\pm$ 0.1)	.012 $\pm$ .004 (0.3 $\pm$ 0.1)	.012 $\pm$ .004 (0.3 $\pm$ 0.1)	.018 $\pm$ .004 (0.45 $\pm$ 0.1)
<b>2A</b> (0805)	.079 $\pm$ .008 (2.0 $\pm$ 0.2)	.049 $\pm$ .008 (1.25 $\pm$ 0.2)	.016 $\pm$ .008 (0.4 $\pm$ 0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-.1</sub> )	.02 $\pm$ .004 (0.5 $\pm$ 0.1)
<b>2B</b> (1206)	.126 $\pm$ .063 (3.2 $\pm$ 1.6)	.063 $\pm$ .008 (1.6 $\pm$ 0.2)	.02 $\pm$ .012 (0.5 $\pm$ 0.3)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-.1</sub> )	.024 $\pm$ .004 (0.6 $\pm$ 0.1)

### Derating Curve

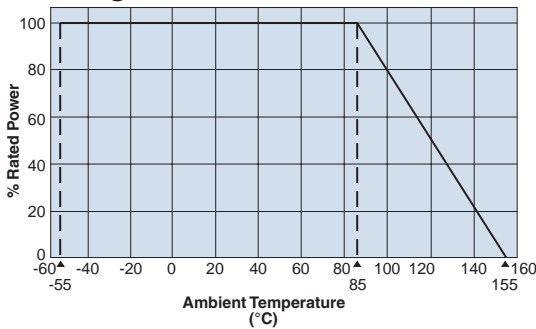

For resistors operated at an ambient temperature of 85°C or above, a power rating shall be derated in accordance with the above derating curve.

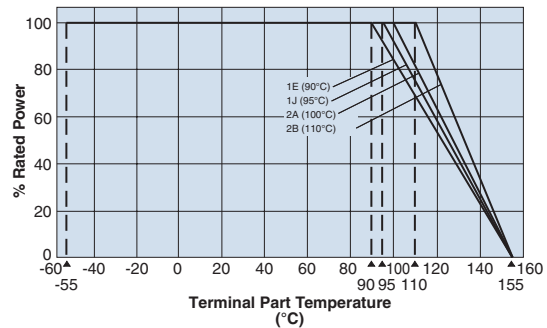

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with derating curve. Please refer to "Introduction of the derating curves based on the terminal part temperature" in the beginning of our catalog before use.

### ordering information

<b>RN73R</b>	<b>2B</b>	<b>T</b>	<b>TD</b>	<b>1002</b>	<b>B</b>	<b>25</b>
Type	Size	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance	T.C.R. (ppm/°C)
	1E: 0.063W 1J: 0.1W 2A: 0.125W 2B: 0.25W	T: Sn	TP: 2mm pitch punched paper TD: 4mm pitch punched paper TE: 4mm pitch plastic embossed For further information on packaging, please refer to Appendix A	3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	A: $\pm 0.05\%$ B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$ F: $\pm 1.0\%$	05 10 25 50 100

### applications and ratings

Part Designation	Power Rating @ 85°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (x10 <sup>-6</sup> /K)	Resistance Range (Ω) E-24, E-96, E-192					Maximum Working Voltage	Maximum Overload Voltage
					(A±0.05%)	(B±0.1%)	(C±0.25%)	(D±0.5%)	(F±1.0%)		
RN73R1E	1/16W (.063W)	85°C	90°C	±10	—	47 - 10k	47 - 10k	47 - 10k	47 - 10k	50V	100V
				±25	—	47 - 300k	47 - 300k	47 - 300k	47 - 300k		
				±50	—	47 - 300k	47 - 300k	10 - 300k	10 - 300k		
RN73R1J	1/10W (.10W)	85°C	95°C	±5	100 - 59k	100 - 59k	—	—	—	75V	150V
				±10	47 - 59k	47 - 59k	47 - 59k	47 - 59k	47 - 59k		
				±25	47 - 59k	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
				±50	—	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
RN73R2A	1/8W (.125W)	85°C	100°C	±5	100 - 100k	100 - 100k	—	—	—	150V	300V
				±10	47 - 100k	47 - 100k	47 - 100k	47 - 100k	47 - 100k		
				±25	47 - 100k	15 - 1.5M	15 - 1.5M	10 - 1.5M	10 - 1.5M		
				±50	—	15 - 1.5M	15 - 1.5M	10 - 1.5M	10 - 1.5M		
RN73R2B	1/4W (.25W)	85°C	110°C	±5	100 - 110k	100 - 110k	—	—	—	200V	400V
				±10	47 - 110k	47 - 110k	47 - 110k	47 - 110k	47 - 110k		
				±25	47 - 110k	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
				±50	—	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
RN73R2B	1/4W (.25W)	85°C	110°C	±100	—	—	—	10 - 1M	10 - 1M	200V	400V

Operating Temperature: -55°C to +155°C

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

### environmental applications

#### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C: T.C.R. $\pm 5 (x10^{-6}/K)$ ; +25°C/-55°C and +25°C/+155°C: another
Overload (Short time)	$\pm 0.05\%$	$\pm 0.01\%$	Rated Voltage x 2.5 or Max. overload voltage, whichever is less for 5 seconds
Resistance to Solder Heat	$\pm 0.05\%^*$	$\pm 0.01\%$	260°C $\pm 5^\circ\text{C}$ , 10 seconds $\pm 1$ second
Rapid Change of Temperature	$\pm 0.1\%^*$	$\pm 0.04\%$	1E, 1J, 2A: -55°C (30 minutes), +155°C (30 minutes), 1000 cycles 2B: -55°C (30 minutes), +155°C (30 minutes), 500 cycles
Moisture Resistance	$\pm 0.25\%$	$\pm 0.07\%$	85°C $\pm 2^\circ\text{C}$ , 85% $\pm 5\%$ RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 85°C	$\pm 0.1\%$	$\pm 0.04\%$	85°C $\pm 2^\circ\text{C}$ , 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	$\pm 0.25\%$	$\pm 0.10\%$	+155°C, 1000 hours

\* Depends on resistance value, please contact KOA Speer for details.

#### Precautions for Use


- The properly and electrostatically measured taping materials are used for the components, but attention should be paid to the fact that there is some danger the parts absorb on the top tapes to cause a failure in the mounting and the parts are destructed by static electricity (1J, 2A, 2B: 1kV and more, 1E: 0.5kV and more at Human Body Model 100pF, 1.5kΩ) to change the resistance in the conditions of an excessive dryness or after the parts are given vibration for a long time as they are packaged on the tapes. Similarly, care should be given not to apply the excessive static electricity when mounting on the boards.
- Ionic impurities such as flux etc. that are attached to these products or those mounted onto a PCB, negatively affect their moisture resistance, corrosion resistance, etc. The flux may contain ionic substances like chlorine, acid, etc. while perspiration and saliva include ionic impurities like sodium (Na<sup>+</sup>), chlorine (Cl<sup>-</sup>) etc. Therefore these kinds of ionic substances may induce electrical corrosion when they invade into the products. Either thorough washing or using RMA solder and flux are necessary since lead free solder contains ionic substances. Washing process is needed, before putting on moisture proof material in order to prevent electrical corrosion.
- When heat-resistant masking tapes are attached to the chip resistors at the time of mounting and then detached, there is a possibility of exfoliation of the top electrodes. It is known that the heat applied in the mounting process will enhance the adhesion strength of the tape adhesive so please avoid the use. If the use of masking tapes are unavoidable, then please be sure not to attach the tape adhesives directly on the products.  
When high-pressure shower cleaning is implemented, there is a possibility of exfoliation of the top electrodes caused by the water pressure stress so please avoid the implementation. If the implementation is unavoidable, then please evaluate the products beforehand.

For Surface Temperature Rise Graph see Environmental Applications. Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)  
Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. 10/23/18




### features

- Nickel chromium thin film resistor element
- Products with lead-free terminations meet EU RoHS requirements





### dimensions and construction

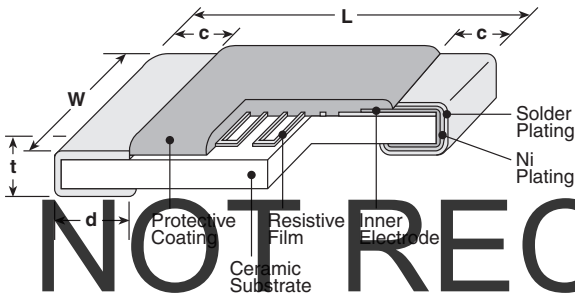

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
RN73 1E (0402)	.039 <sup>+0.004</sup> <sub>-.002</sub> (1.0 <sup>+0.1</sup> <sub>-0.05</sub> )	.02±.002 (0.5±0.05)	.008±.004 (0.2±0.1)	.01 <sup>+0.002</sup> <sub>-.004</sub> (0.25 <sup>+0.05</sup> <sub>-0.1</sub> )	.014±.002 (0.35±0.05)
RN73 1J (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
RN73 2A (0805)	.079±.008 (2.0±0.2)	.049±.008 (1.25±0.2)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02±.004 (0.5±0.1)
RN73 2B (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)
RN73 2E (1210)	.178±.008 (4.5±0.2)	.098±.008 (2.5±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)

### Derating Curve

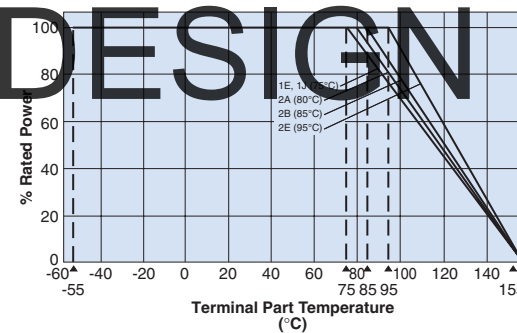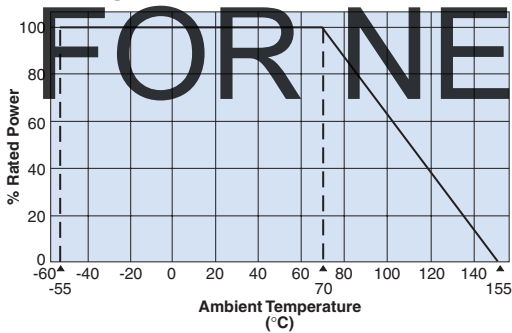

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

For resistors operated terminal part temperature of described for each size or above, a power rating shall be derated in accordance with derating curve. Please refer to "Introduction of the derating curves based on the terminal part temperature" in the beginning of our catalog before use.

### ordering information

RN73	2B	T	TE	1002	B	25
Type	Size	Termination Material	Packaging	Nominal Resistance	Tolerance	T.C.R. (ppm/°C)
	1E 1J 2A 2B 2E	T: Sn L: SnPb	TP: 0402: 7" 2mm pitch punch paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210: 7" embossed plastic TED: 0805, 1206, 1210: 10" embossed plastic For further information on packaging, please refer to Appendix A	3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	A: ±0.05% B: ±0.1% C: ±0.25% D: ±0.5% F: ±1.0%	05 10 25 50 100

ultra precision 0.05%, 0.1%, 1% tolerance  
 thin film chip resistor

## applications and ratings

Part Designation	Power Rating <sup>1</sup> @ 70°C		Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range (Ω) E-24, E-96, E-192*					Absolute Max. Working Voltage	Absolute Max. Overload Voltage
	General	High Power				(A±0.05%)	(B±0.1%)	(C±0.25%)	(D±0.5%)	(F±1.0%)		
RN731E	.063W	—	70°C	75°C	±25	—	100 - 100k	100 - 100k	10 - 120k	10 - 120k	50V	100V
					±50	—	100 - 100k	100 - 100k	10 - 120k	10 - 120k		
RN731J	.063W	.1W	70°C	75°C	±5	1K - 47k	100 - 47k	—	—	—	75V	150V
					±10	1K - 47k	100 - 47k	100 - 47k	100 - 47k	100 - 47k		
					±25	1K - 47k	15 - 360k	15 - 360k	10 - 360k	10 - 360k		
					±50	—	15 - 360k	15 - 360k	10 - 360k	10Ω - 360k		
					±100	—	—	—	10 - 360k	10 - 360k		
RN732A	.1W	.125W	70°C	80°C	±5	100 - 100k	100 - 100k	—	—	—	150V	300V
					±10	100 - 100k	100 - 100k	100 - 100k	100 - 100k	100 - 100k		
					±25	51 - 100k	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
					±50	—	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
					±100	—	—	—	10 - 1M	10 - 1M		
RN732B	.125W	.25W	70°C	85°C	±5	100 - 300k	100 - 300k	—	—	—	200V	400V
					±10	100 - 300k	100 - 300k	100 - 300k	100 - 300k	100 - 300k		
					±25	51 - 300k	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
					±50	—	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
					±100	—	—	—	10 - 1M	10 - 1M		
RN732E	.25W	—	70°C	85°C	±10	100 - 510k	100 - 510k	100 - 510k	100 - 510k	100 - 510k	200V	400V
					±25	51 - 510k	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
					±50	—	15 - 1M	15 - 1M	10 - 1M	10 - 1M		

\* No marking on E-192 values. Operating Temperature Range: -55°C to +155°C. Reliability performance is different. Please confirm the performance table. If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature", please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

 environmental applications  
 Performance Characteristics

Parameter	Requirement Δ R ±(%+0.05Ω)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C: T.C.R. = ±5 (X10 <sup>-6</sup> /K) +25°C/-55°C and +25°C/+125°C: all others
Overload (Short time)	General: ±0.1% High Power: ±0.5%	±0.01% ±0.03%	Rated Voltage x 2.5 or Max. overload voltage, whichever is less for 5 seconds
Resistance to Solder Heat	±0.1%	±0.04%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.25%	±0.03%	-55°C (30 minutes), +125°C (30 minutes), 300 cycles
Moisture Resistance	General: ±0.5% High Power: ±0.5%	±0.06% ±0.07%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	General: ±0.25% High Power: ±0.5%	±0.02% ±0.1%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±0.25%	±0.1%	+125°C, 1000 hours
	±0.5%	±0.25%	+155°C, 1000 hours

## Precautions for Use

- The properly and electrostatically measured taping materials are used for the components, but attention should be paid to the fact that there is some danger the parts absorb on the top tapes to cause a failure in the mounting and the parts are destructed by static electricity (1kV and more: 1J, 2A, 2B, 2E 0.5kV and more: 1E, Human Body Model 100pF 1.5kΩ) to change the resistance in the conditions of an excessive dryness or after the parts are given vibration for a long time as they are packaged on the tapes. Similarly, care should be given not to apply the excessive static electricity when mounting on the boards.
- Ionic impurities such as flux etc. that are attached to these products or those mounted onto a PCB, negatively affect their moisture resistance, corrosion resistance, etc. The flux may contain ionic substances like chlorine, acid, etc. while perspiration and saliva include ionic impurities like sodium (Na<sup>+</sup>), chlorine (Cl<sup>-</sup>) etc. Therefore these kinds of ionic substances may induce electrical corrosion when they invade into the products. Either thorough washing or using RMA solder and flux are necessary since lead free solder contains ionic substances. Washing process is needed, before putting on moisture proof material in order to prevent electrical corrosion.
- The upper electrodes could be peeled off when a heat-resistant masking tape is attached to the mounted chip resistors and then detached from them. It is confirmed that the adhesiveness gets stronger due to the exposure to heat under mounting. Accordingly, we recommend the use of masking tape be refrained. If the use of heat-resistant masking tape is unavoidable, please make sure that the adhesives on the tape do not directly come in contact with the product.
- When high-pressure shower cleaning is implemented, there is a possibility of exfoliation of the top electrodes caused by the water pressure stress so please avoid the implementation.
- If the implementation is unavoidable, then please evaluate the products beforehand.

For Surface Temperature Rise Graph see Environmental Applications. Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)  
 Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. 5/18/18


**NEW**



### features


- Maximum operating temperature is 200°C. Suitable for conductive glue mounting.
- Excellent heat resistance and weather resistance are ensured by the use of metal glaze thick film
- High stability and high reliability with the triple-layer structure of electrode
- Applicable to various kinds of automatic mounters for taping, etc
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

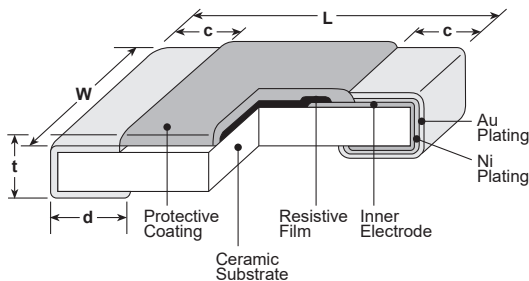

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1J (0603)</b>	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.014±.006 (0.35±0.15)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A (0805)</b>	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.018±.010 (0.45±0.25)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-.1</sub> )	.02±.004 (0.5±0.1)
<b>2B (1206)</b>	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.022±.014 (0.55±0.35)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.1</sub> )	.024±.004 (0.6±0.1)

### Derating Curve

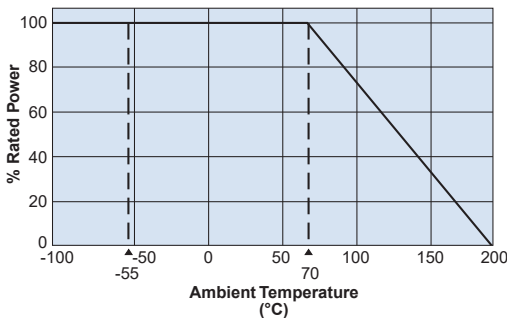

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

### ordering information

<b>HRK73B</b>	<b>2B</b>	<b>G</b>	<b>TD</b>	<b>103</b>	<b>J</b>
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
HRK73B HRK73H	1J: 0.1W 2A: 0.125W 2B: 0.25W	G: Au T: SN (Under Development)	TD: 4mm pitch punched paper For further information on packaging, please refer to Appendix A	3 digits	J: ±5%

## applications and ratings

Part Designation	Power Rating	Rated Ambient Temp.	T.C.R. (x10 <sup>-6</sup> /K) Max.	Resistance Range		Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temp. Range
				HRK73H F: ±1% E24*	HRK73B J: ±5% E24			
HRK731J (0603)	0.1W	70°C	±200	10Ω~1MΩ	1Ω~1MΩ	50V	100V	-55°C to +200°C
			±400	—	1.1MΩ~10MΩ			
HRK732A (0805)	0.125W	70°C	±200	10Ω~1MΩ	1Ω~1MΩ	150V	200V	-55°C to +200°C
			±400	—	1.1MΩ~10MΩ			
HRK732B (1206)	0.25W	70°C	±200	10Ω~1MΩ	1Ω~1MΩ	200V	400V	-55°C to +200°C
			±400	—	1.1MΩ~10MΩ			

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

\* Under development

## environmental applications

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
Overload (Short time)	±2%	±0.5%	Rated Voltage x 2.5 for 5 seconds (2B: Rated Voltage x 2 for 5 seconds)
Moisture Resistance	±2%	±0.75%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±2%	±0.5%	+200°C, 1000 hours

For Surface Temperature Rise Graph see Environmental Applications. Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


10/25/18



### features


- Wide-side termination (reverse-geometry) type flat chip resistor
- High reliability and performance with T.C.R.  $\pm 100 \times 10^{-6}/K$ , resistance tolerance  $\pm 1\%$
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

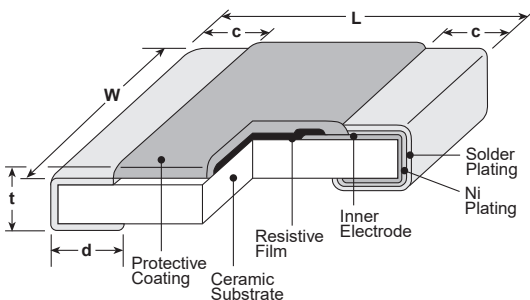


	Type (Inch Size Code)	Dimensions inches (mm)				
		L	W	c	d	t
NEW	<b>1E</b> (0204)	.020±.002 (0.5±0.05)	.039±.002 (1.0±0.05)	.004±.002 (0.1±0.05)	.006±.002 (0.15±0.05)	.014±.002 (0.35±0.05)
NEW	<b>1J</b> (0306)	.031±.004 (0.8±0.1)	.063±.004 (1.6±0.1)	.006±.004 (0.15±0.1)	.008±.004 (0.2±0.1)	.018±.004 (0.45±0.1)
NEW	<b>2A</b> (0508)	.049±.006 (1.25±0.15)	.079±.006 (2.0±0.15)	.012±.008 (0.3±0.2)	.014±.008 (0.35±0.2)	.022±.004 (0.55±0.1)
	<b>2B</b> (0612)	.063±.006 (1.6±0.15)	.126±.008 (3.2±0.2)	.012±.008 (0.3±0.2)	.018±.006 (0.45±0.15)	.024±.004 (0.6±0.1)
	<b>2H</b> (1020)	.098±.006 (2.5±0.15)	.197±.006 (5.0±0.15)	.016±.008 (0.4±0.2)	.030±.006 (0.75±0.15)	
	<b>2J</b> (1218)	.122±.006 (3.1±0.15)	.181±.006 (4.6±0.15)	.016±.008 (0.4±0.2)		
	<b>3A</b> (1225)	.122±.006 (3.1±0.15)	.252±.006 (6.3±0.15)	.018±.008 (0.45±0.2)		

### Derating Curve

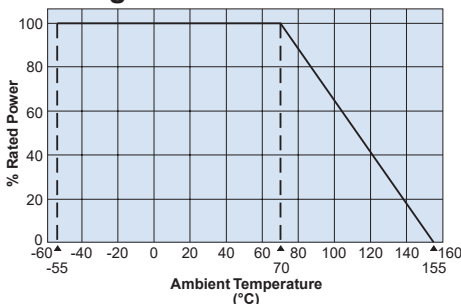


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

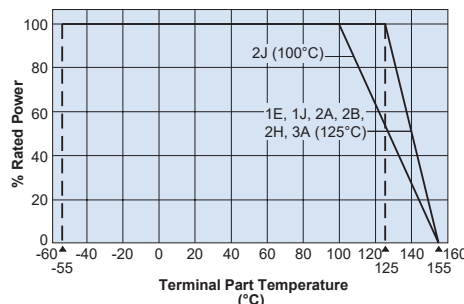

For resistors operated terminal temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve above.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

If you want to use at rated power (\*1), use derating curves based on the terminal part temperature on the right side graph.

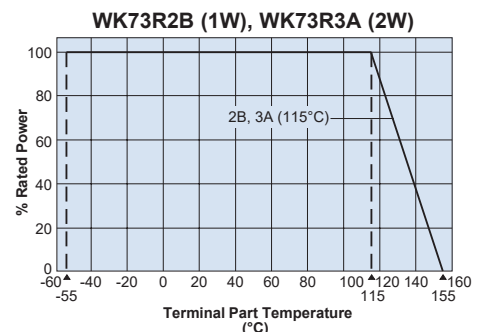

### ordering information

<b>WK73R</b>	<b>2J</b>	<b>T</b>	<b>TE</b>	<b>33L0</b>	<b>F</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
WK73R	New 1E: 0.33W New 1J: 0.5W New 2A: 0.75W, 1W 2B: 0.75W, 1W 2H: 1W 2J: 1W 3A: 1.5W, 2W	T: Sn	TP: 0204: 7" 2mm pitch punched paper TD: 0306, 0508, 0612: 7" 4mm pitch punched paper TE: 1020, 1218, 1225: 7" embossed plastic TED: 1020, 1218, 1225: 10" embossed plastic For further information on packaging, please refer to Appendix A	±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on values <10Ω All values less than 0.1Ω (100mΩ) are expressed in mΩ with "L" as decimal. Ex: 33mΩ, 1% = 33L0	D: ±0.5% F: ±1% J: ±5%

## applications and ratings

	Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range (Ω)			Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range
						D±0.5% E-24/E-96	F±1% E-24/E-96	J±5% E-24			
NEW	WK73R1E	0.33W <sup>1</sup>	—	125°C	±100	—	10 - 1M	10 - 1M	75V	100V	-55°C to +155°C
NEW	WK73R1J	0.5W <sup>1</sup>	—	125°C	±100	—	10 - 1M	10 - 1M	150V	200V	
NEW	WK73R2A	0.75W <sup>1</sup>	—	125°C	±100	—	20.5k - 1M	22k - 1M	200V	400V	
		1.0W <sup>1</sup>	—	125°C	±100	—	10 - 20k	10 - 20k			
	WK73R2B	0.75W	70°C	125°C	±100	10 - 1M	10 - 1M	10 - 1M	200V	400V	
		1.0W <sup>1</sup>	—	115°C	±100	10 - 9.76k	10 - 9.76k	10 - 9.1k			
	WK73R2H	1.0W	70°C	125°C	±100	—	10 - 430k	10 - 430k	200V	400V	
					±200	—	432k - 1M	470k - 1M			
	WK73R2J	1.0W	70°C	100°C	±100	—	10 - 510k	10 - 510k	200V	400V	
					±200	—	511k - 1M	560k - 1M			
	WK73R3A	1.5W	70°C	125°C	±100	—	10 - 330k	10 - 330k	200V	400V	
					±200	—	332k - 1M	360k - 1M			
		2.0W <sup>1</sup>	—	115°C	±100	—	10 - 330k	10 - 330k			
					±200	—	332k - 1M	360k - 1M			

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

<sup>1</sup> If you want to use at rated power use derating curves based on the terminal part temperature on the right side graph located on previous page. If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature", please give priority to the "Rated Terminal Part Temperature." For more details refer to the "Introduction of the derating curves based on the terminal part temperature" in the beginning of the catalog

## environmental applications

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.005\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.2%	WK73R1E (0.33W), WK73R1J (0.5W), WK73R2A (0.75W, 1W)WK73R3A (2W): Rated voltage x2.0 for 5 seconds. WK73R2B, R2H, R2J, R3A: Rated voltage x2.5 for 3 seconds
Resistance to Solder Heat	±1%	±0.2%	260°C ± 5°C, 10 seconds ± 1 second
Bending Test	±1%	±0.1%	Holding point 90mm, Bending 1 time, Bending 5mm
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±3%: 1E ±2%: All others	±1%: 1E ±0.2%: All others	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±3%: 1E ±2%: All others	±1%: 1E ±0.2%: All others	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.2%	+155°C, 1000 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18

### features


- Wide-side termination (reverse-geometry) type flat chip resistor
- High reliability and performance with T.C.R.  $\pm 100 \times 10^{-6}/K$ , resistance tolerance  $\pm 1\%$
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

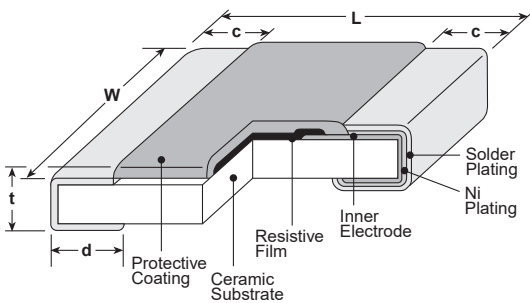

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>2B15</b> (0612)	.063±.006 (1.6±0.15)	.126±.008 (3.2±0.2)	.012±.008 (0.3±0.2)	.018±.006 (0.45±0.15)	.024±.004 (0.6±0.1)
<b>2H2</b> (1020)	.098±.006 (2.5±0.15)	.197±.006 (5.0±0.15)	.016±.008 (0.4±0.2)	.030±.006 (0.75±0.15)	
<b>3A3</b> (1225)	.122±.006 (3.1±0.15)	.252±.006 (6.3±0.15)	.018±.008 (0.45±0.2)		

### Derating Curve

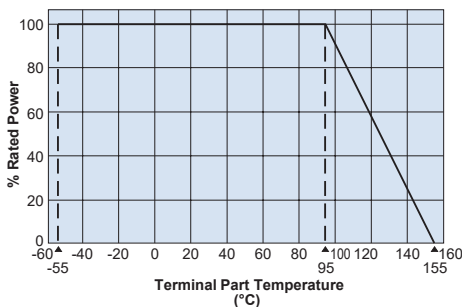

For resistors operated terminal temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve above. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### ordering information

<b>WK73R</b>	<b>2H2</b>	<b>T</b>	<b>TE</b>	<b>1002</b>	<b>F</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
WK73R	New 2B15: 0.15W 2H2: 2W 3A3: 3W	T: Sn	TD: 0612: 7" 4mm pitch punched paper TE: 1020, 1225: 7" 4mm pitch embossed plastic For further information on packaging, please refer to Appendix A	±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on values <10Ω	D: ±0.5% F: ±1% J: ±5%


## applications and ratings

Part Designation	Power Rating	Rated Terminal Part Temp.	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range (Ω)			Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range
				D±0.5% E-24/E-96	F±1% E-24/E-96	J±5% E-24			
WK73R2B15	1.5W	95°C	±100	10 - 9.76k	10 - 9.76k	10 - 9.1k	200V	400V	-55°C to +155°C
WK73R2H2	2.0W	95°C	±100	—	10 - 430k	10 - 430k	200V	400V	
			±200	—	432k - 1M	470k - 1M			
WK73R3A3	3.0W	95°C	±100	—	10 - 330k	10 - 330k	200V	400V	
			±200	—	332k - 1M	360k - 1M			

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

## environmental applications

### Device Temperature Data

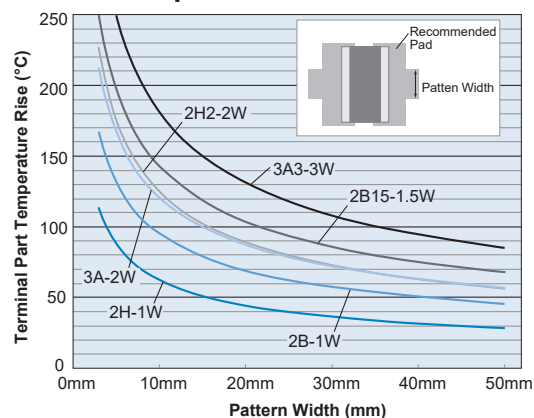

### Performance Characteristics

Parameter	Requirement Δ R ±(%+0.005Ω)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.2%	Rated voltage x 2.0 for 5 seconds
Resistance to Solder Heat	±1%	±0.2%	260°C ± 5°C, 10 seconds ± 1 second
Bending Test	±1%	±0.1%	Holding point 90mm, Bending 1 time, Bending 5mm
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±0.2%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.2%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.2%	+155°C, 1000 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/06/17




**NEW**



### features


- Superior to WK73 series in pulse withstanding voltage
- Suitable for both flow and reflow solderings
- This products meet EU RoHS requirements
- AEC-Q200 Qualified

### dimensions and construction

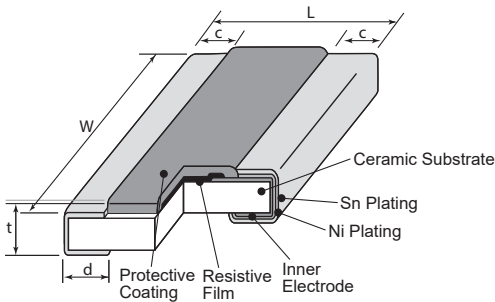


	Type (Inch Size Code)	Dimensions inches (mm)				
		L	W	c	d	t
NEW	<b>2B (0612)</b>	$.063 \pm .008$ ( $1.6 \pm .02$ )	$.126 \pm .012$ ( $3.2 \pm .03$ )	$.012 \pm .008$ ( $0.3 \pm 0.2$ )	$.018 \pm .006$ ( $0.45 \pm 0.15$ )	$.024 \pm .004$ ( $0.6 \pm 0.1$ )
	<b>2H (1020)</b>	$.098 \pm .006$ ( $2.5 \pm 0.15$ )	$.197 \pm .006$ ( $5.0 \pm 0.15$ )	$.016 \pm .008$ ( $0.4 \pm 0.2$ )	$.030 \pm .006$ ( $0.75 \pm 0.15$ )	$.024 \pm .004$ ( $0.6 \pm 0.1$ )
NEW	<b>3A (1225)</b>	$.122 \pm .004$ ( $3.1 \pm .01$ )	$.248 \pm .006$ ( $6.3 \pm 0.15$ )	$.018 \pm .008$ ( $0.45 \pm 0.2$ )	$.030 \pm .006$ ( $0.75 \pm 0.15$ )	$.024 \pm .004$ ( $0.6 \pm 0.1$ )

### Derating Curve

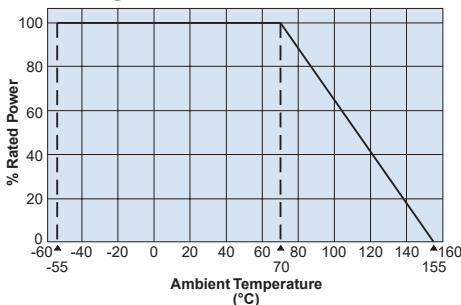

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

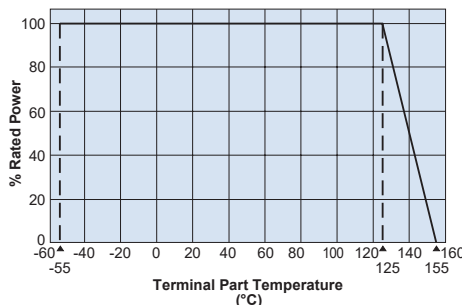

For resistors operated terminal temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### ordering information

<b>WG73</b>	<b>2H</b>	<b>T</b>	<b>TE</b>	<b>101</b>	<b>K</b>
Type	Power Rating	Termination Surface Material	Packaging	Nominal Resistance	Resistance Tolerance
	NEW 2B: 1W 2H: 1W NEW 3A: 2W	T : Sn	TD: 4mm pitch punch paper TE: 4mm pitch embossed plastic For further information on packaging, please refer to Appendix A	3 digits	K: ±10% M: ±20%

## wide terminal type surge current flat chip resistors (anti surge)

### applications and ratings

	Part Designation	Power Rating	Rated Ambient Temperature	Rated Terminal Part Temperature	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range (Ω)		Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
						K±10% E-12	M±20% E-12			
NEW	WG732B	1.0W	70°C	125°C	±100	560m ~ 1k	560m ~ 1k	200V	400V	-55°C to +155°C
	WG732H	1.0W	70°C	125°C	±100	560m ~ 1k	560m ~ 1k	200V	400V	-55°C to +155°C
NEW	WG733A	2.0W	70°C	125°C	±100	560m ~ 1k	560m ~ 1k	200V	400V	-55°C to +155°C

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower


If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature" in your usage conditions, please give priority to the "Rated Terminal Part Temperature."

Prior to use and for more details, please refer to the "Introduction of the derating curves based on the terminal part temperature" in the beginning of our catalog.

### environmental applications

#### One-Pulse Limiting Electric Power

WG73

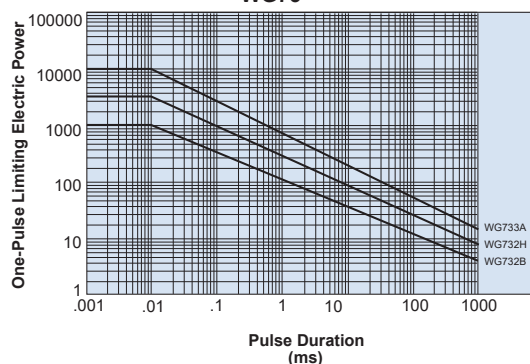

#### Performance Characteristics


Parameter	Requirement $\Delta R \pm(\%+0.005\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.2%	Rated voltage (DC) x 2.5 for 5 seconds
Resistance to Solder Heat	±1%	±0.2%	260°C ± 5°C, 10 seconds ± 1 second
Bending Test	±1%	±0.1%	Holding point 90mm, Bending 1 time, Bending 5mm
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±0.2%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.2%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.2%	+155°C, 1000 hours

**features**

- Superior to RK73B/RK73H series in surge/pulse withstanding voltage
- Untrimmed, superior surge/pulse and ESD withstanding
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: 0603(1J), 0805(2A), 1206(2B), 1210(2E), 2010(2H/W2H), 2512(3A/W3A)



**dimensions and construction**

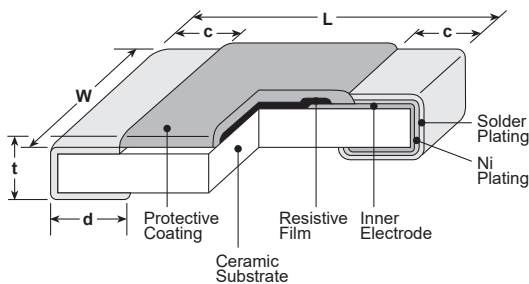

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>SG731J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>SG732A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-.01</sub> )	.02±.004 (0.5±0.1)
<b>SG732B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)
<b>SG732E</b> (1210)		.102±.008 (2.6±0.2)	.02±.012 (0.5±0.3)		
<b>SG732H</b> (2010)	.197±.008 (5.0±0.2)	.098±.008 (2.5±0.2)	.02±.012 (0.5±0.3)	.026±.006 (0.65±0.15)	
<b>SG73W2H</b> (2010)	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)		.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.01</sub> )	
<b>SG733A</b> (2512)				.026±.006 (0.65±0.15)	
<b>SG73W3A</b> (2512)					

**ordering information**

<b>SG73</b>	<b>2B</b>	<b>T</b>	<b>TD</b>	<b>102</b>	<b>K</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
SG73	1J 2A 2B 2E W2H W3A 2H 3A	T: Sn L: SnPb: (NOT available in SG732H/W2H, SG733A/W3A)	TP: 0603, 0805: 7" 2mm pitch punch paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210, 2010 & 2512: 7" embossed plastic TED: 0805, 1206, 1210, 2010 & 2512: 10" embossed plastic For further information on packaging, please refer to Appendix A	±10%, ±20%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω	K: ±10% M: ±20%

## applications and ratings

Part Designation	Power Rating @ 70°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range (E-12) (K±10%, M±20%)	Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temp. Range
SG731J (0603)	0.1W	70°C	125°C	±400 ±200	1Ω - 8.2Ω 10Ω - 1MΩ	50V	100V	-55°C to +155°C
SG732A (0805)	0.125W	70°C	125°C	±400 ±200	1Ω - 8.2Ω 10Ω - 1MΩ	150V	200V	
SG732B (1206)	.33W	70°C	125°C	±400 ±200	1Ω - 8.2Ω 10Ω - 1MΩ	200V	400V	
SG732E (1210)	0.5W	70°C	125°C	±400 ±200	1Ω - 8.2Ω 10Ω - 1MΩ			
SG732H/W2H (2010)	0.75W	70°C	125°C	±400 ±200	1Ω - 8.2Ω 10Ω - 1MΩ			
SG733A/W3A (2512)	1W	70°C	125°C	±400 ±200	1Ω - 8.2Ω 10Ω - 1MΩ			


Parentheses indicate EIA package size codes.

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

## environmental applications

### Derating Curve

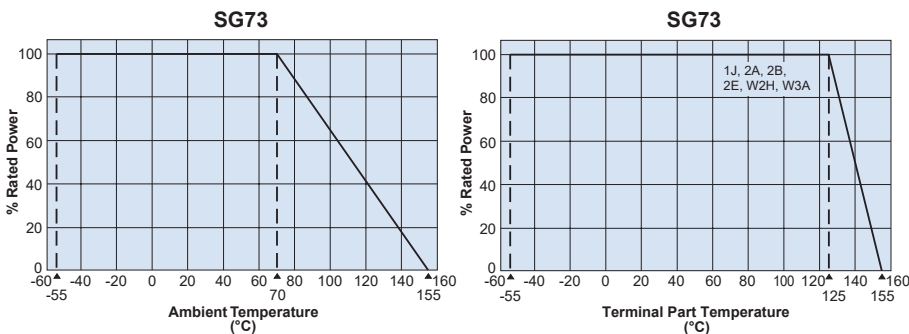


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### One-Pulse Limiting Electric Power

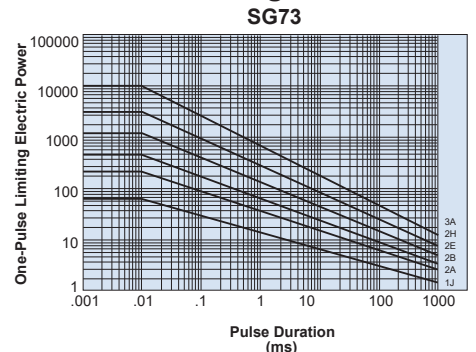

The maximum applicable voltage is equal to the max. overload voltage. Please contact factory for resistance characteristics of continuous applied pulse.

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated Voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1%	±0.75%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±3%	±0.75%	40°C ± 2°C, 90%~95%RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±3%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	+155°C, 1000 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


11/16/16



## features




- Superior to RK73B/RK73H series in pulse withstanding voltage and high power
- Down to  $\pm 0.5\%$  tolerance
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

## dimensions and construction

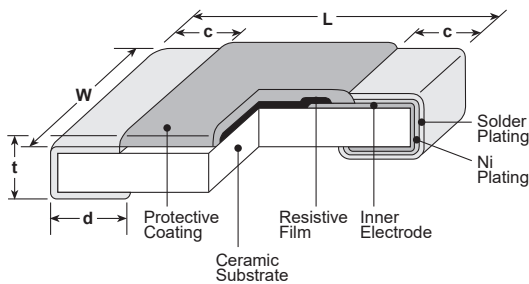

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
SG73P1E (0402)	.039 <sup>+0.004</sup> <sub>-0.002</sub> (1.0 <sup>+0.1</sup> <sub>-0.05</sub> )	.02±.002 (0.5±0.05)	.006±.004 (0.15±0.1)	.010 <sup>+0.002</sup> <sub>-0.004</sub> (0.25 <sup>+0.05</sup> <sub>-0.1</sub> )	.014±.002 (0.35±0.05)
SG73P1J (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
SG73P2A (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.012 <sup>+0.008</sup> <sub>-0.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.012 <sup>+0.008</sup> <sub>-0.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02±.004 (0.5±0.1)
SG73P2B (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.016 <sup>+0.008</sup> <sub>-0.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.016 <sup>+0.008</sup> <sub>-0.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)
NEW SG73P2E SG73P2E1 (1210)		.102±.008 (2.6±0.2)			

## Derating Curve

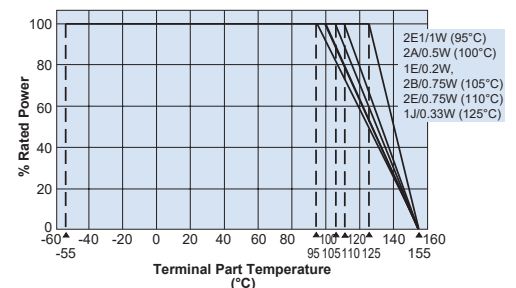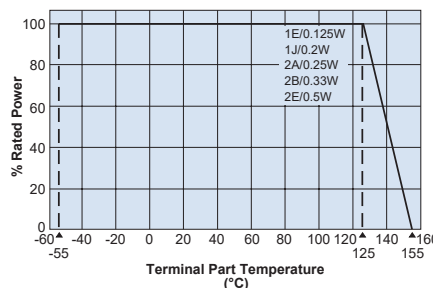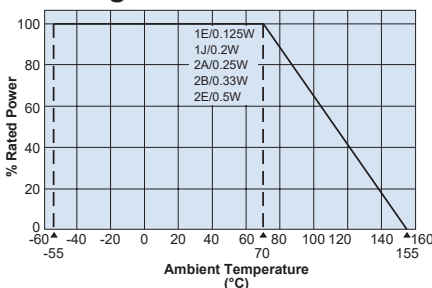

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use. If you want to use the rated power of <sup>\*</sup>2, <sup>\*</sup>3, please use the derating curve based on the terminal part temperature on the right hand side.

## ordering information

<b>SG73P</b>	<b>2B</b>	<b>T</b>	<b>TD</b>	<b>102</b>	<b>K</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
SG73P	1E 1J 2A 2B 2E NEW 2E1	T: Sn	TP: 0402, 0603, 0805: 7" 2mm pitch punch paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210: 7" embossed plastic TED: 0805, 1206, 1210: 10" embossed plastic For further information on packaging, please refer to Appendix A	$\pm 0.5\%$ , $\pm 1\%$ : 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω $\pm 2\%$ , $\pm 5\%$ : 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω	D: $\pm 0.5\%$ F: $\pm 1\%$ G: $\pm 2\%$ J: $\pm 5\%$

**anti-surge endured pulse power  
thick film chip resistor**
**applications and ratings**


Part Designation	Power Rating @ 70°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range (Ω)			Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temp. Range
					(E-24)/E-96 (D±0.5%)	(E-24)/E-96 (F±1%)	(E-24) (G±2%, J±5%)			
SG73P1E (0402)	0.125W	70°C	125°C	±200	10 - 1M	1 - 1M	1 - 10M	75V	100V	-55°C to +155°C
	0.2W*2	—	105°C							
SG73P1J (0603)	0.2W	70°C	125°C	±100	510 - 576k	510 - 576k	510 - 560k	150V	200V	
				±100*1	10 - 499 590k - 1M	1 - 499 590k - 1M	1 - 470 620k - 10M			
	0.33W*2	—	125°C	±100	510 - 576k	510 - 576k	510 - 560k			
				±100*1	10 - 499 590k - 1M	1 - 499 590k - 1M	1 - 470 620k - 10M			
SG73P2A (0805)	0.25W	70°C	125°C	±100	100 - 100k	100 - 100k	100 - 100k	400V	600V (800V)*3	
				±200	10 - 97.6 102k - 1M	1 - 97.6 102k - 1M	1 - 91 110k - 10M			
	0.5W*2	—	100°C	±100	100 - 100k	100 - 100k	100 - 100k			
				±200	10 - 97.6 102k - 1M	1 - 97.6 102k - 1M	1 - 91 110k - 10M			
SG73P2B (1206)	0.33W	70°C	125°C	±100	300 - 1M	300 - 1M	300 - 1M	200V	400V	
				±200	10 - 294	1 - 294	1 - 270 1.2M - 10M			
	0.75W*2	—	105°C	±100	300 - 1M	300 - 1M	300 - 1M			
				±200	10 - 294	1 - 294	1 - 270 1.2M - 10M			
SG73P2E (1210)	0.5W	70°C	125°C	±200	10 - 1M	1 - 1M	1 - 10M	200V	400V	
	0.75W*2	—	110°C							
NEW SG73P2E1 (1210)	1.0W*2	—	95°C	±200	10 - 1M	1 - 1M	1 - 10M	200V	400V	

Parentheses indicate EIA package size codes.

\*1 Cold T.C.R. (-55°C ~ +25°C) is +150 x 10<sup>-6</sup>/K Rated voltage = √Power rating x resistance value or max. working voltage, whichever is lower. Please contact KOA Speer for how to handle a specific surge/pulse. If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

\*2 If you want to use the rated power of \*2, \*3 please use the derating curves based on the terminal part temperature graphs on the previous page.

\*3 Applies when power rating is 0.4W or lower.

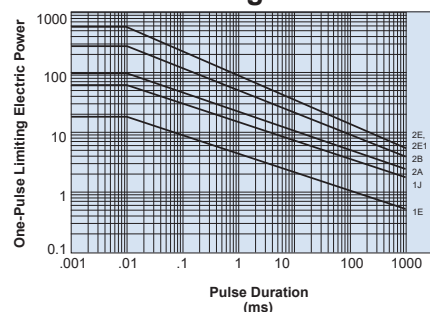**environmental applications**
**One-Pulse Limiting Electric Power**


The maximum applicable voltage is equal to the max. overload voltage. Please contact factory for resistance characteristics of continuous applied pulse.

**Performance Characteristics**

Parameter	Requirement Δ R ±(%+0.1Ω)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated Voltage x 2.5 for 5 seconds (2A: 0.4W, 0.5W; 2B: 0.75W; 2E: 0.75W; 2E1: 1W rated power x 2 for 5 seconds)
Resistance to Solder Heat	±1%	±0.75%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±3%	±0.75%	40°C ± 2°C, 90%~95%RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±3%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	+155°C, 1000 hours


Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


8/23/18

### features

- Superior to RK73B/RK73H series in surge withstanding voltage and high power
- ESD withstanding; down to  $\pm 0.5\%$  tolerance
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

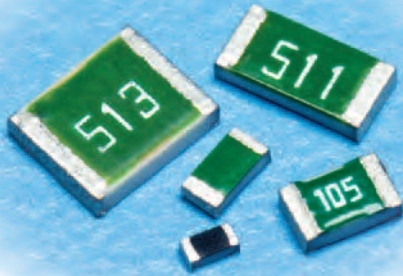

### dimensions and construction

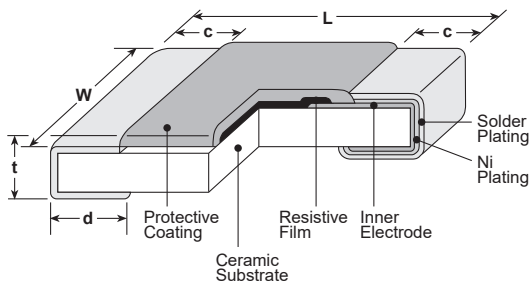

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
SG73S1E (0402)	.039 <sup>+0.004</sup> <sub>-.002</sub> (1.0 <sup>+0.1</sup> <sub>-0.05</sub> )	.02±.002 (0.5±0.05)	.006±.004 (0.15±0.1)	.010 <sup>+0.002</sup> <sub>-.004</sub> (0.25 <sup>+0.05</sup> <sub>-0.1</sub> )	.014±.002 (0.35±0.05)
SG73S1J (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
SG73S2A (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02±.004 (0.5±0.1)
SG73S2B (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)
NEW SG73S2E SG73S2E1 (1210)		.102±.008 (2.6±0.2)			

### ordering information

SG73S	2B	T	TD	102	K
Type	Size	Termination Material	Packaging	Nominal Resistance	Tolerance
SG73S	1E 1J 2A 2B 2E NEW 2E1	T: Sn	TP: 0402, 0603, 0805: 7" 2mm pitch punch paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210: 7" embossed plastic TED: 0805, 1206, 1210: 10" embossed plastic For further information on packaging, please refer to Appendix A	±0.5%, ±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω ±2%, ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω	D: ±0.5% F: ±1% G: ±2% J: ±5%

## applications and ratings

Part Designation	Power Rating @ 70°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range (Ω)			Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range
					(E-24)/E-96 (D±0.5%)	(E-24)/E-96 (F±1%)	(E-24) (G±2%, J±5%)			
SG73S1E (0402)	0.125W	70°C	125°C	±200	10 - 1M	1 - 1M	1 - 10M	75V	100V	-55°C to +155°C
	0.2W* <sup>2</sup>	—	105°C							
SG73S1J (0603)	0.2W	70°C	125°C	±100	510 - 576k	510 - 576k	510 - 560k	150V	200V	
				±100* <sup>1</sup>	10 - 499	1 - 499	1 - 470			
	0.33W* <sup>2</sup>	—	125°C	±100	510 - 576k	510 - 576k	510 - 560k			
				±100* <sup>1</sup>	10 - 499	1 - 499	1 - 470			
SG73S2A (0805)	0.25W	70°C	125°C	±200	10 - 1M	1 - 1M	1 - 10M	400V	600V (800V)* <sup>3</sup>	
	0.5W* <sup>2</sup>	—	100°C							
SG73S2B (1206)	0.33W	70°C	125°C	±200	10 - 1M	1 - 1M	1 - 10M	200V	400V	
	0.75W* <sup>2</sup>	—	105°C							
SG73S2E (1210)	0.5W	70°C	125°C	±200	10 - 1M	1 - 1M	1 - 10M	200V	400V	
	0.75W* <sup>2</sup>	—	110°C							
SG73S2E1 (1210)	1W	—	95°C	±200	10 - 1M	1 - 1M	1 - 10M	200V	400V	

Parentheses indicate EIA package size codes.

\*<sup>1</sup> Cold T.C.R. (-55°C ~ +25°C) is +150 x 10<sup>-6</sup>/K




Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

Please contact KOA Speer for how to handle a specific surge/pulse

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog. \*<sup>2</sup> If you want to use the rated power of \*<sup>2</sup>, \*<sup>3</sup> please reference below. \*<sup>3</sup> Applies when power rating is 0.4W or lower.

## environmental applications

### Derating Curve

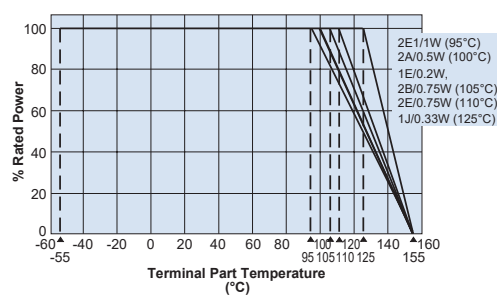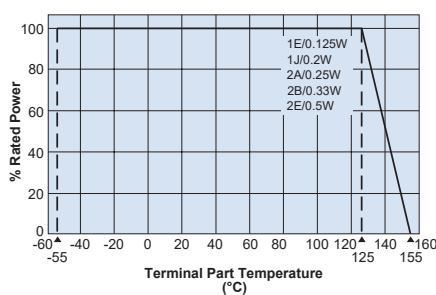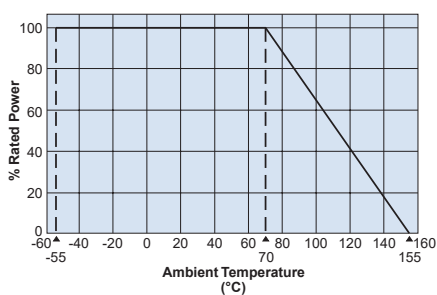

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

If you want to use the rated power of \*<sup>2</sup>, \*<sup>3</sup> please use the derating curve based on the terminal part temperature on the right hand side.

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)






Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18



**environmental applications** (continued)

**ESD Limiting Voltage**

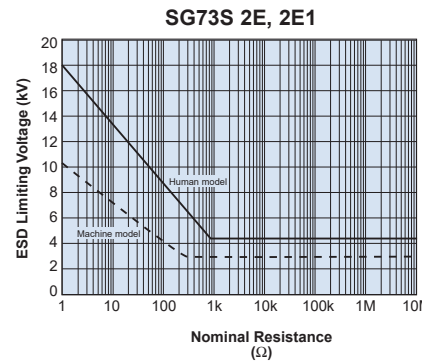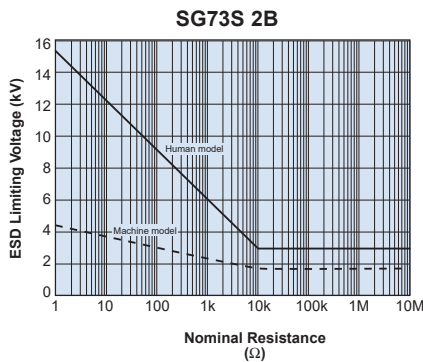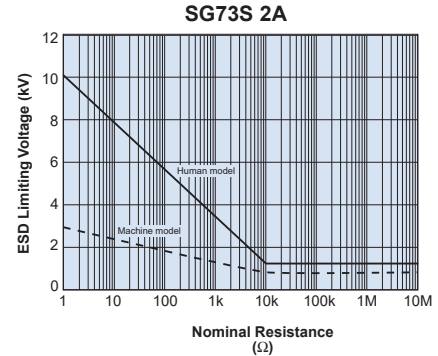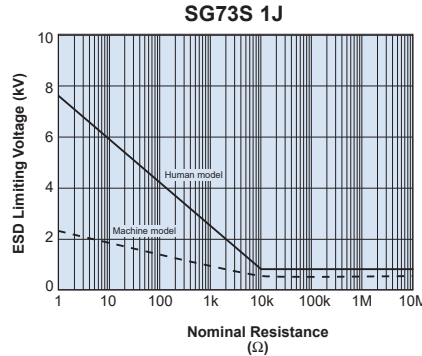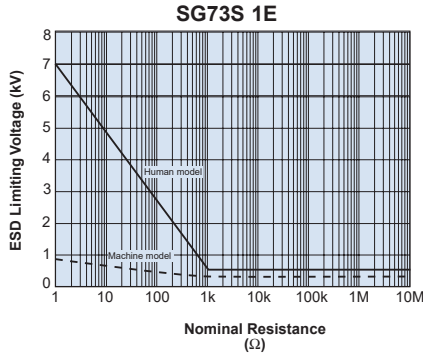

**Performance Characteristics**

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated Voltage x 2.5 for 5 seconds (2A: 0.4W, 0.5W; 2B: 0.75W; 2E: 0.75W; 2E1: 1W rated power x 2 for 5 seconds)
Resistance to Solder Heat	±1%	±0.75%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±3%	±0.75%	40°C ± 2°C, 90%~95%RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±3%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	+155°C, 1000 hours


## endured pulse power flat chip resistors (ultra precision grade)



### features


- Superior to RK73 series chip resistors in pulse withstanding voltage and high power
- High precision resistor with T.C.R.  $\pm 50 \times 10^{-6}/K$  and tolerance  $\pm 0.25\%$ ,  $\pm 0.5\%$
- Suitable for both reflow and flow solderings
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

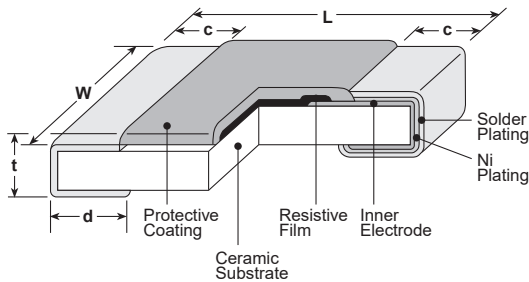


Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>SG73G1J</b> (0603)	.063 $\pm$ .008 (1.6 $\pm$ 0.2)	.031 $\pm$ .004 (0.8 $\pm$ 0.1)	.012 $\pm$ .004 (0.3 $\pm$ 0.1)	.012 $\pm$ .004 (0.3 $\pm$ 0.1)	.018 $\pm$ .004 (0.45 $\pm$ 0.1)
<b>SG73G2A</b> (0805)	.079 $\pm$ .008 (2.0 $\pm$ 0.2)	.049 $\pm$ .004 (1.25 $\pm$ 0.1)	.012 <sup>+0.008</sup> <sub>-0.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.012 <sup>+0.008</sup> <sub>-0.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02 $\pm$ .004 (0.5 $\pm$ 0.1)
<b>SG73G2B</b> (1206)	.126 $\pm$ .008 (3.2 $\pm$ 0.2)	.063 $\pm$ .008 (1.6 $\pm$ 0.2)	.016 <sup>+0.008</sup> <sub>-0.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.016 <sup>+0.008</sup> <sub>-0.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024 $\pm$ .004 (0.6 $\pm$ 0.1)


### Derating Curve

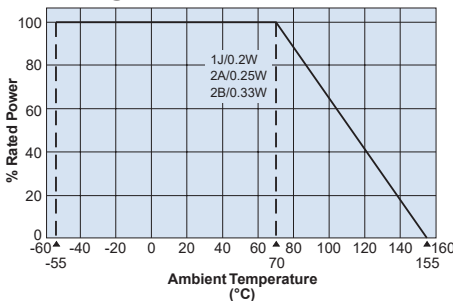

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

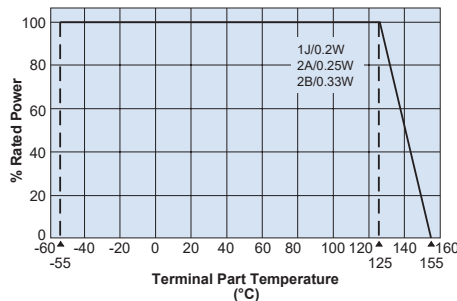

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use. \*1 If you want to use the rated power of \*1, please use the derating curve based on the terminal part temperature on the right hand side.

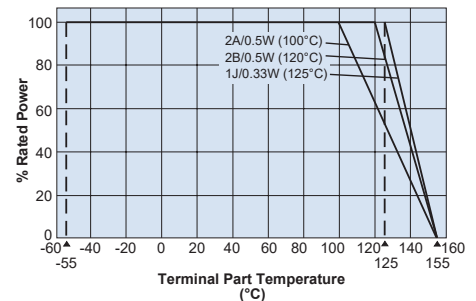

### ordering information

<b>SG73G</b>	<b>2A</b>	<b>T</b>	<b>TD</b>	<b>1002</b>	<b>D</b>
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
SG73G	1J: 0.33W 2A: 0.5W 2B: 0.5W	T: Sn	TP: 2mm pitch punch paper TD: 4mm pitch punched paper TE: 4mm pitch embossed plastic For further information on packaging, please refer to Appendix A	D: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	C: $\pm 0.25\%$ D: $\pm 0.5\%$


## applications and ratings

Part Designation	Power Rating @ 70°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range (Ω) C±0.25%, D±0.5% E-24/E-96	Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temp. Range
SG73G1J (0603)	0.2W	70°C	125°C	±50	10 - 1M	150V	200V	-55°C to +155°C
	0.33W*1	—	125°C					
SG73G2A (0805)	0.25W	70°C	125°C	±50	10 - 1M	200V	400V	
	0.5W*1	—	100°C					
SG73G2B (1206)	0.33W	70°C	125°C	±50	10 - 1M	200V	400V	
	0.5W*1	—	120°C					

Parentheses indicate EIA package size codes. Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower. If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog. \*1 If you want to use the rated power of \*1, please use the derating curve based on the terminal part temperature on the previous page.

## environmental applications

### One-Pulse Limiting Electric Power

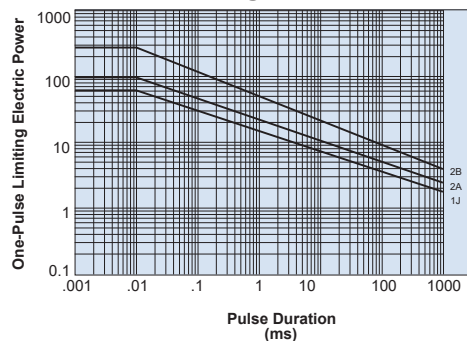

The maximum applicable voltage is equal to the max. overload voltage. Please contact factory for resistance characteristics of continuous applied pulse.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated Voltage x 2.5 for 5 seconds (2A: 0.5W rated power x 2 for 5 seconds)
Resistance to Solder Heat	±1%	±0.75%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±0.75%	40°C ± 2°C, 90%~95%RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	+155°C, 1000 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


10/25/17

### features

- Superior to RK73 series in maximum working voltage
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.



### dimensions and construction

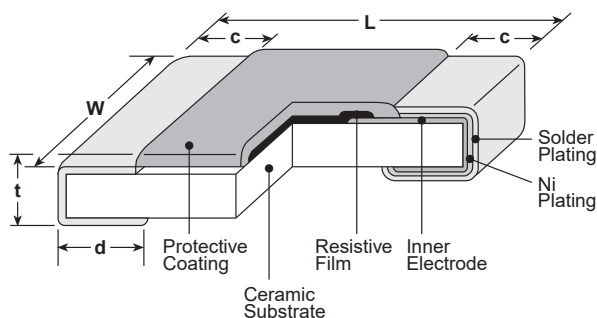

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-.01</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)
<b>2H</b> (2010)	.197±.008 (5.0±0.2)	.098±.008 (2.5±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)
<b>3A</b> (2512)	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)

### ordering information

<b>HV73</b>	<b>2B</b>	<b>T</b>	<b>TD</b>	<b>1004</b>	<b>F</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
	1J: 0.1W 2A: 0.25W 2B: 0.25W 2H: 0.5W 3A: 1W	T: Sn	TD: 0603, 0805, 1206: 7" 4mm pitch punched paper TE: 2010 & 2512: 7" embossed plastic For further information on packaging, please refer to Appendix A	±0.5%, ±1%: 3 significant figures + 1 multiplier ±2%, ±5%: 2 significant figures + 1 multiplier	D: ±0.5% F: ±1% G: ±2% J: ±5%



## applications and ratings

Part Designation	Power Rating @ 70°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range (Ω)				Absolute Maximum Working Voltage	Maximum Overload Voltage (D.C.)*	Operating Temp. Range
					E-24/E-96 (D±0.5%)	E-24/E-96 (F±1%)	E-24 (G±2%)	E-24 (J±5%)			
1J	0.1W	70°C	80°C	±100**	—	10k - 10M	10k - 10M	10k - 10M	350V	500V*	-55°C to +155°C
2A	0.25W	70°C	100°C	±100	100k - 1M	100k - 10M	100k - 10M	100k - 10M	400V	800V*	
				±200	—	—	—	11M - 51M			
2B	0.25W	70°C	100°C	±100	100k - 1M	100k - 10M	100k - 10M	100k - 10M	800V	1000V*	
				±200	—	—	—	11M - 51M			
2H	0.5W	70°C	90°C	±100	100k - 1M	100k - 10M	100k - 10M	100k - 10M	2000V (D.C.)	3000V*	
				±200	—	10.2M - 51M	11M - 51M	11M - 51M			
				±300	—	51.1M - 100M	56M - 100M	56M - 100M			
3A	1W	70°C	105°C	±100	43k - 1M	43k - 10M	43k - 10M	43k - 10M	3000V (D.C.)	4000V*	
				±200	—	10.2M - 20M	11M - 20M	11M - 51M			

\* Max. overload voltage is specified by D.C. voltage



\*\* Cold T.C.R. (-55°C ~ +25°C) of 1.02MΩ ~ 10MΩ is +200x10<sup>-6</sup>/K

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

## environmental applications

### Derating Curve

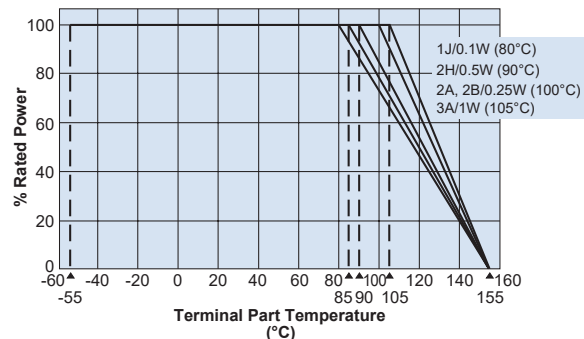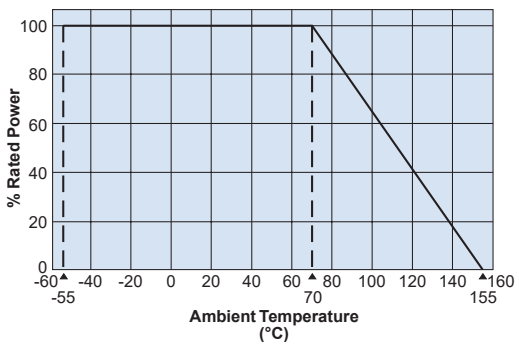

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the above derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated Voltage (D.C.) x 2.5 for 5 seconds
Resistance to Solder Heat	±1%	±0.5%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%: (10kΩ ≤ R ≤ 10MΩ) ±1%: (10MΩ ≤ R ≤ 100MΩ)	±0.3%: (10kΩ ≤ R ≤ 10MΩ) ±0.5%: (10MΩ ≤ R ≤ 100MΩ)	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±0.75%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±2%	±0.3%	+155°C, 1000 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18


## flat chip resistors for high voltage (automotive)



### features

- Superior to RK73 series in maximum working voltage
- Suitable for flow and reflow solderings
- Products meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- Suitable for high reliable applications like automotives
- AEC-Q200 qualified

### dimensions and construction

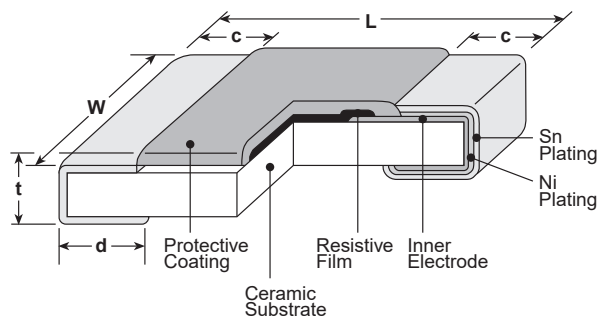

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)

### ordering information

<b>HV73V</b>	<b>2A</b>	<b>T</b>	<b>TD</b>	<b>104</b>	<b>J</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
HV73V	1J: 0.1W 2A: 0.25W 2B: 0.25W	T: Sn	TD: 7" 4mm pitch punched paper TE: 7" 4mm pitch embossed plastic For further information on packaging, please refer to Appendix A	±0.5%, ±1%: 3 significant figures + 1 multiplier ±2%, ±5%: 2 significant figures + 1 multiplier	D: ±0.5% F: ±1% G: ±2% J: ±5%

### applications and ratings

Part Designation	Power Rating @ 70°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range (Ω)				Maximum Working Voltage	Maximum Overload Voltage (D.C.)*	Operating Temperature Range
					E-24/E-96 (D±0.5%)	E-24/E-96 (F±1%)	E-24 (G±2%)	E-24 (J±5%)			
HV73V1J	0.1W	70°C	80°C	±100**	—	10k - 10M	10k - 10M	10k - 10M	350V	500V*	-55°C to +155°C
HV73V2A	0.25W	70°C	100°C	±100	100k - 1M	100k - 10M	100k - 10M	100k - 10M	400V	800V*	
				±200	—	—	—	11M - 51M			
HV73V2B	0.25W	70°C	100°C	±100	100k - 1M	100k - 10M	100k - 10M	100k - 10M	800V	1000V*	
				±200	—	—	—	11M - 51M			


Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

\* Maximum Overload Voltage is specified by D.C. voltage      \*\* Cold T.C.R. (-55°C ~ +25°C) of 1.02MΩ ~ 10MΩ is +200x10<sup>-6</sup>/K


If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

### environmental applications

#### Derating Curve

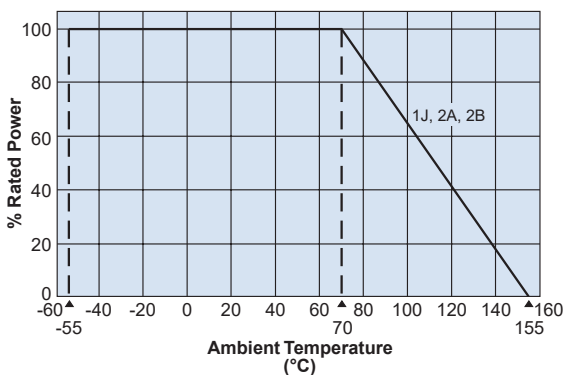

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

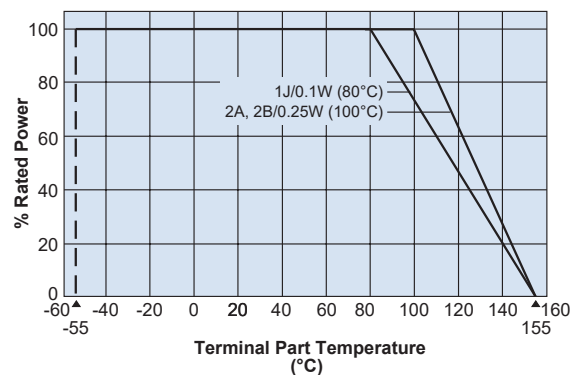

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the above derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### Performance Characteristics

Parameter	Requirement Δ R ±(%+0.1Ω)		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated Voltage (D.C.) x 2.5 for 5 seconds
Resistance to Solder Heat	±1%	±0.5%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%: (10kΩ≤R≤10MΩ) ±1%: (11MΩ≤R≤51MΩ)	±0.3%: (10kΩ≤R≤10MΩ) ±0.5%: (11MΩ≤R≤51MΩ)	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±0.75%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±2%	±0.3%	+155°C, 1000 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


11/06/17

### features

- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Excellent heat resistance and weather resistance are ensured by the use of metal glaze thick film
- High stability and high reliability with the triple-layer structure of electrode
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: 0201 (1H), 0402 (1E), 0603 (1J), 0805 (2A), 1206 (2B), 1210 (2E), 2010 (W2H), 2512 (W3A)



### dimensions and construction

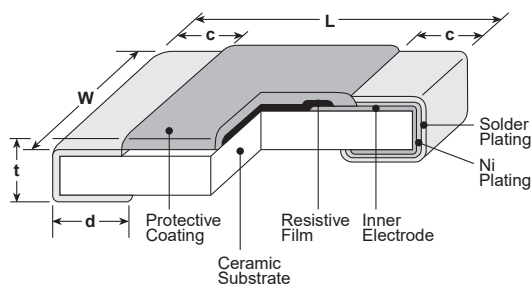

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1F</b> (01005)	.016±.001 (0.4±0.02)	.008±.001 (0.2±0.02)	.004±.001 (0.1±0.03)	.004±.001 (0.11±0.03)	.005±.001 (0.13±0.02)
<b>1H</b> (0201)	.024±.001 (0.6±0.03)	.012±.001 (0.3±0.03)	.004±.002 (0.1±0.05)	.006±.002 (0.15±0.05)	.009±.001 (0.23±0.03)
<b>1E</b> (0402)	.039 <sup>+0.004</sup> <sub>-0.002</sub> (1.0 <sup>+0.1</sup> <sub>-0.05</sub> )	.02±.002 (0.5±0.05)	.008±.004 (0.2±0.1)	.01 <sup>+0.002</sup> <sub>-0.004</sub> (0.25 <sup>+0.05</sup> <sub>-0.1</sub> )	.014±.002 (0.35±0.05)
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-0.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)		.016 <sup>+0.008</sup> <sub>-0.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	
<b>2E</b> (1210)		.102±.008 (2.6±0.2)			
<b>W2H</b> (2010)	.197±.008 (5.0±0.2)	.098±.008 (2.5±0.2)	.02±.012 (0.5±0.3)	.023±.006 (0.65±0.15)	.024±.004 (0.6±0.1)
<b>W3A/ W3A2*</b> (2512)	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)			

\* RK73Z exempt

### ordering information

RK73H	2A	RT	TD	1002	F
Type	Power Rating	Termination Surface Material	Packaging	Nominal Resistance	Resistance Tolerance
RK73B RK73H RK73Z	1F 1H 1E 1J 2A 2B 2E W2H W3A W3A2	RT: Sn Anti-Sulfur	TX: 01005 only: 4mm width - 1mm pitch plastic embossed TBL: 01005 only: 2mm pitch pressed paper TC: 0201 only: 7" 2mm pitch pressed paper (TC: 10,000 pcs/reel, TCM: 15,000 pcs/reel) TPL: 0402 only: 2mm pitch punch paper TP: 0402, 0603, 0805: 7" 2mm pitch punch paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210, 2010 & 2512: 7" embossed plastic TED: 0805, 1206, 1210, 2010 & 2512: 10" embossed plastic For further information on packaging, please refer to Appendix A	RK73B: 3 digits RK73H: 4 digits RK73Z: None	D: ±0.5% F: ±1% G: ±2% J: ±5%

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18



### applications and ratings

#### RK73B/RK73H

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range				Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range			
					RK73H		RK73B							
					D±0.5% E24, E96	F±1% E24, E96*	G±2% E24	J±5% E24						
1F	0.03W	70°C	—	±200	—	100kΩ - 2MΩ*	100kΩ - 1MΩ	100kΩ - 10MΩ	20V	30V	-55°C to +125°C			
				±250		10Ω - 91kΩ*	10Ω - 91kΩ	10Ω - 91kΩ						
				0 - +300		—	1Ω - 9.1Ω	1Ω - 9.1Ω						
1H	0.05W		125°C	—	±200	100Ω - 100kΩ	100Ω - 1MΩ	—	100 - 1M	25V		50V		
					±300	—	10Ω - 97.6Ω	—	10Ω - 91Ω					
1E	0.1W		125°C	—	±100	100Ω - 1MΩ	10Ω - 1MΩ	—	—	75V		100V		
1J	0.1W				±200	—	1.02MΩ - 10MΩ	10Ω - 10MΩ	1Ω - 10MΩ					
					±100	1.02kΩ - 1MΩ	1.02kΩ - 1MΩ	—	—					
					±200	—	1.02MΩ - 10MΩ	1.1kΩ - 10MΩ	1.1kΩ - 10MΩ					
	0.125W				±100	100Ω - 1kΩ	10Ω - 1kΩ	—	—					
					±200	—	—	10Ω - 1kΩ	1Ω - 1kΩ					
2A	0.25W				125°C	—	±100	100Ω - 1MΩ	10Ω - 1MΩ				—	—
2B	0.25W	±200					—	1.02MΩ - 10MΩ	10Ω - 10MΩ		1Ω - 10MΩ			
		±100					100Ω - 1MΩ	10Ω - 1MΩ	—		—			
		±200					—	1.02MΩ - 10MΩ	10Ω - 10MΩ		1Ω - 10MΩ			
	0.5W	±100					100Ω - 1MΩ	10Ω - 10MΩ	—		—			
		±200					—	—	10Ω - 1MΩ		1Ω - 1MΩ			
W2H	0.75W	125°C	—	±100			10Ω - 1MΩ	10Ω - 1MΩ	—	—	200V	400V		
W3A	1W			±200			—	1 - 9.76	1Ω - 10MΩ	1Ω - 10MΩ				
				±100			10Ω - 1MΩ	10Ω - 1MΩ	—	—				
				±200			—	1.02MΩ - 10MΩ	10Ω - 10MΩ	1Ω - 10MΩ				
	2W			±100			10Ω - 1MΩ	10Ω - 1MΩ	—	—				
				±200			—	1.02MΩ - 10MΩ	10Ω - 10MΩ	1Ω - 10MΩ				
W3A2	2W			—	95°C	±100	10Ω - 1MΩ	10Ω - 1MΩ	—	—			200V	400V
						±200	—	1.02MΩ - 10MΩ	10Ω - 10MΩ	1Ω - 10MΩ				


Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

\*The nominal resistance value for RK73H1F (F:±1%) is E24


If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves in the terminal part temperature" in the beginning of the catalog.

While using under high power, the temperature of the product may increase depending on the condition of heat dissipation from PCB. Be sure to check the terminal part temperature as well as precautions to use on delivery specification before use.

### Derating Curve

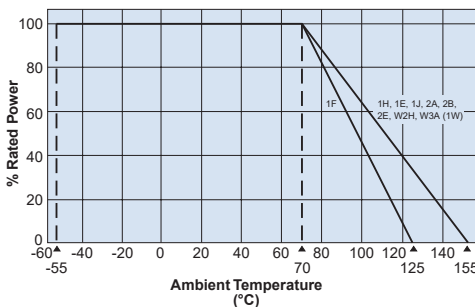

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

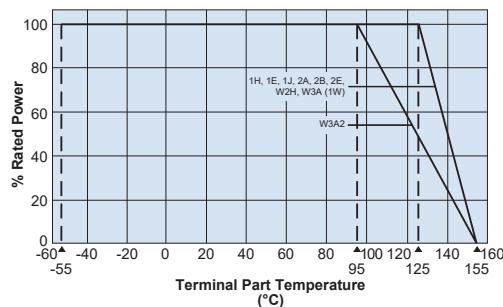

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the above derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### applications and ratings (continued)

#### RK73Z

Part Designation	Rated Ambient Temperature	Rated Terminal Part Temperature	Resistance	Current Rating	Maximum Surge Current	Operating Temperature Range
1H	+70°C	+125°C	100mΩ max.	0.5A	1A	-55°C to +155°C
1E			50mΩ max.	1A	2A	
1J				2A	5A	
2A			10A			
2B						
2E						
W2H						
W3A						

### environmental applications


#### Performance Characteristics

Parameter	RK73H, RK73B Requirement $\Delta R$ $\pm(\%+0.1\Omega)$		RK73Z Requirement		Test Method
	Limit	Typical	Limit	Typical	
Resistance	Within specified tolerance	—	R $\leq$ 100mΩ: 1H R $\leq$ 50mΩ: All others	R $\leq$ 90mΩ: 1H R $\leq$ 40mΩ: All others	25°C
T.C.R.	Within specified T.C.R.	—	—	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	$\pm 2\%$	$\pm 1\%$ : 1F $\pm 0.8\%$ : All others	R $\leq$ 100mΩ: 1H R $\leq$ 50mΩ: All others	R $\leq$ 90mΩ: 1H R $\leq$ 40mΩ: All others	RK73B, RK73H Rated Voltage x 2.5 for 5 seconds (1E, 2B, W3A2: Rated Voltage x 2 for 5 seconds) RK73Z: Max. overload current for 5 seconds
Resistance to Solder Heat	$\pm 1\%$ : 10Ω $\leq$ R $\leq$ 1MΩ $\pm 3\%$ : R $\leq$ 10Ω, R $>$ 1MΩ	$\pm 1\%$ : R $\leq$ 10Ω, R $>$ 1MΩ $\pm 0.5\%$ : All others	R $\leq$ 100mΩ: 1H R $\leq$ 50mΩ: All others	R $\leq$ 90mΩ: 1H R $\leq$ 40mΩ: All others	260°C $\pm$ 5°C, 10 seconds $\pm$ 1 second
Rapid Change of Temperature	$\pm 1\%$ : 1F $\pm 0.5\%$ : All others	$\pm 0.5\%$ : 1F $\pm 0.3\%$ : All others	R $\leq$ 100mΩ: 1H R $\leq$ 50mΩ: All others	R $\leq$ 90mΩ: 1H R $\leq$ 40mΩ: All others	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	$\pm 2\%$ : 1J, 2A, 2B $\pm 3\%$ : All others	$\pm 0.75\%$ : 1J, 2A, 2B $\pm 1.5\%$ : 1F $\pm 1\%$ : All others	R $\leq$ 150mΩ: 1H R $\leq$ 100mΩ: All others	R $\leq$ 100mΩ: 1H R $\leq$ 50mΩ: All others	40°C $\pm$ 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	$\pm 2\%$ : 1J, 2A, 2B $\pm 3\%$ : All others	$\pm 0.75\%$ : 1J, 2A, 2B $\pm 1\%$ : All others	R $\leq$ 150mΩ: 1H R $\leq$ 100mΩ: All others	R $\leq$ 100mΩ: 1H R $\leq$ 50mΩ: All others	70°C $\pm$ 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	$\pm 1\%$	$\pm 0.5\%$	R $\leq$ 150mΩ: 1H R $\leq$ 100mΩ: All others	R $\leq$ 100mΩ: 1H R $\leq$ 50mΩ: All others	+125°C, 1000 hours: 1F; +155°C, 1000 hours: 1H, 1E, 1J, 2A, 2B, 2E, W2H, W3A
Sulfuration Test	$\pm 5\%$	$\pm 0.3\%$ : 1F, 1H $\pm 0.2\%$ : All others	R $\leq$ 150mΩ: 1H R $\leq$ 100mΩ: All others	R $\leq$ 100mΩ: 1H R $\leq$ 50mΩ: All others	Soaked in industrial oil with 3.5% sulfur concentration 105°C $\pm$ 3°C, 500 hours

## features


- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Metal-glaze thick film resistor for surface mounting
- High precision resistor with T.C.R.  $\pm 50 \times 10^{-6}/K$  and tolerance  $\pm 0.25\%$
- Suitable for both flow and reflow solderings
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

## dimensions and construction

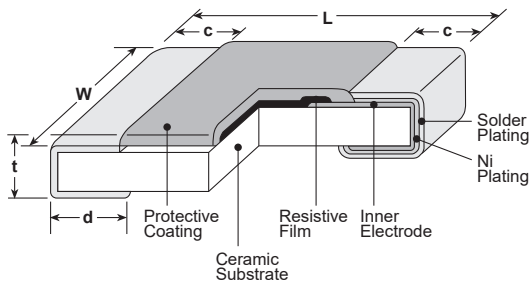


Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1E</b> (0402)	.039 <sup>+0.004</sup> <sub>-.002</sub> (1.0 <sup>+0.1</sup> <sub>-0.05</sub> )	.02±.002 (0.5±0.05)	.008±.004 (0.2±0.1)	.01 <sup>+0.002</sup> <sub>-.004</sub> (0.25 <sup>+0.05</sup> <sub>-0.1</sub> )	.014±.002 (0.35±0.05)
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)

## Derating Curve

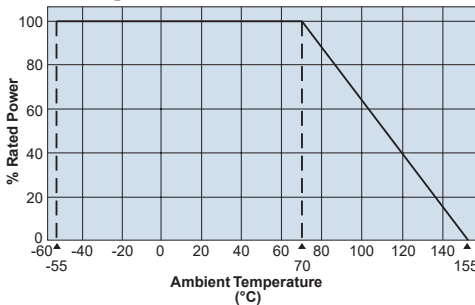

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

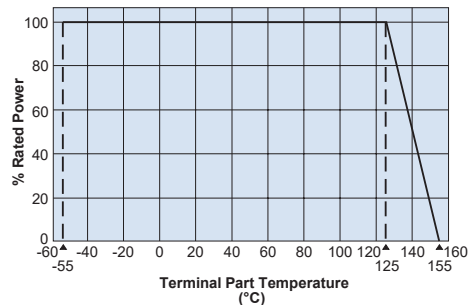

For resistors operated terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

## ordering information

<b>RK73G</b>	<b>2A</b>	<b>RT</b>	<b>TD</b>	<b>1002</b>	<b>D</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
	1E: 0.1W 1J: 0.1W 2A: 0.125W 2B: 0.25W	RT: Sn	TPL: 0402 only: 2mm pitch punched paper TPD: 0402 only: 10" plastic embossed TP: 0402, 0603: 7" 2mm pitch punched paper TD: 0603, 0805, 1206: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206: 10" paper tape TE: 0805, 1206: 7" plastic embossed TED: 0603, 0805, 1206: 10" embossed plastic For further information on packaging, please refer to Appendix A	3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	C: ±0.25% D: ±0.5% F: ±1%

### applications and ratings

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range			Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
					E-24, E-96 (C±0.25%)	E-24, E-96 (D±0.5%)	E-24, E-96 (F±1%)			
RK73G1E (0402)	1/10W (.10W)	+70°C	+125°C	±50	—	30Ω - 1MΩ	30Ω - 1MΩ	50V	100V	-55°C to +155°C
RK73G1J (0603)	1/10W (.10W)				75V			150V		
RK73G2A (0805)	1/8W (.125W)				100Ω - 1MΩ			150V	200V	
RK73G2B (1206)	1/4W (.25W)				200V			400V		

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves in the terminal part temperature" in the beginning of the catalog.

### environmental applications

#### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.6%	Rated Voltage x 2.5 for 5 seconds (1E, 2B: Rated Voltage x 2 for 5 seconds)
Resistance to Solder Heat	±1%	±0.4%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%: 1J, 2A, 2B ±3%: 1E	±0.6%: 1J, 2A, 2B; ±1%: 1E	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%: 1J, 2A, 2B ±3%: 1E	±0.6%: 1J, 2A, 2B; ±1%: 1E	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.6%	+155°C, 1000 hours
Sulfuration Test	±5%	±0.2%	Soaked in industrial oil with sulfur substance 3.5% contained 105°C ± 3°C, 500 hours

For Surface Temperature Rise Graph see Environmental Applications. Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18




**NEW**

### features




- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Metal-glaze thick film resistor for surface mounting
- High precision resistor with T.C.R.  $\pm 25 \times 10^{-6}/K$  and tolerance  $\pm 0.1\%$
- High reliability with  $\Delta R$  of  $\pm 0.2\%$  and  $\pm 0.4\%$  in the reliability test
- Suitable for both flow and reflow solderings
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

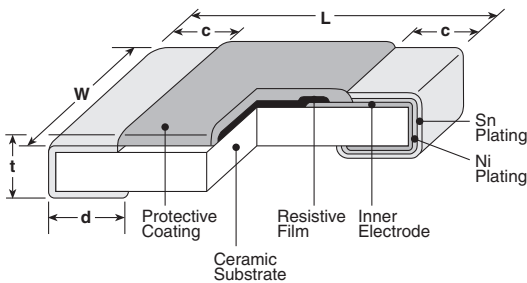


Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1J (0603)</b>	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.008±.004 (0.2±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)

### Derating Curve

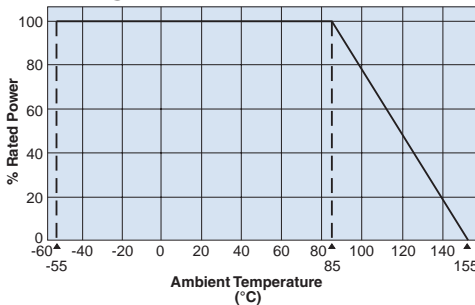

For resistors operated at an ambient temperature of 85°C or above, a power rating shall be derated in accordance with the derating curve.

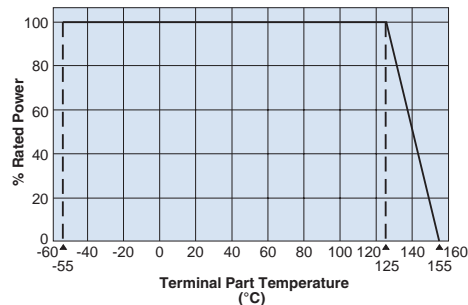

For resistors operated terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### ordering information

<b>RS73F</b>	<b>1J</b>	<b>RT</b>	<b>TD</b>	<b>1002</b>	<b>B</b>
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
RS73F RS73G	1J: 0.2W	RT: Sn	TD: 4mm pitch punched paper For further information on packaging, please refer to Appendix A	4 digits	B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$ F: $\pm 1\%$

### applications and ratings

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range*2				Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
					B±0.1% E-24, E-96	C±0.25% E-24, E-96	D±0.5% E-24, E-96	F±1% E-24, E-96			
RS73F1J (0603)	.2W	85°C	+125°C	±25*1	100Ω - 1MΩ	100Ω - 1MΩ	100Ω - 1MΩ	100Ω - 1MΩ	100V	150V	-55°C to +155°C
RS73G1J (0603)				±50							

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

\*1 Measurement Temperature: +25°C/+125°C. Cold T.C.R. (-55°C/+25°C) is -50~+25x10<sup>-6</sup>/K

\*2 Please inquire about E192

If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves in the terminal part temperature" in the beginning of the catalog.

### environmental applications

#### Performance Characteristics


Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±0.2%	±0.03%	Rated Voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±0.2%	±0.1%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.2%	±0.05%	-55°C (30 minutes), +125°C (30 minutes), 1000 cycles
Moisture Resistance	±0.2%: (100Ω≤R≤200kΩ) ±0.4%: (200kΩ<R≤1MΩ)	±0.04%: (100Ω≤R≤200kΩ) ±0.08%: (200kΩ<R≤1MΩ)	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 85°C	±0.2%	±0.05%	85°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±0.2%: (100Ω≤R≤200kΩ) ±0.4%: (200kΩ<R≤1MΩ)	±0.1%: (100Ω≤R≤200kΩ) ±0.2%: (200kΩ<R≤1MΩ)	+155°C, 1000 hours
Sulfuration Test	±5%	±0.2%	Soaked in industrial oil with sulfur substance 3.5% contained 105°C ± 3°C, 500 hours



### features


- Anti-sulfuration type, wide-side termination (reverse-geometry) type flat chip resistor
- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Suitable for both flow and reflow solderings
- This products meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

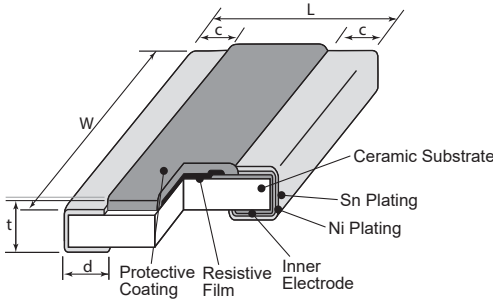


Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>NEW</b> <b>2A</b> <b>(0508)</b>	.049±.006 (1.25±0.15)	.079±.006 (2.0±0.15)	.012±.008 (0.3±0.2)	.014±.008 (0.35±0.2)	.022±.004 (0.55±0.1)
<b>2B</b> <b>(0612)</b>	.063±.008 (1.6±.02)	.126±.012 (3.2±.03)	.012±.008 (0.3±0.2)	.018±.006 (0.45±0.15)	.024±.004 (0.6±0.1)
<b>2H</b> <b>(1020)</b>	.098±.008 (2.5±.02)	.197±.008 (5.0±.02)	.016±.008 (0.4±0.2)	.030±.006 (0.75±0.15)	
<b>2J</b> <b>(1218)</b>	.122±.008 (3.1±.02)	.181±.008 (4.6±.02)	.016±.008 (0.4±0.2)	.030±.006 (0.75±0.15)	.024±.004 (0.6±0.1)
<b>3A</b> <b>(1225)</b>	.122±.008 (3.1±.02)	.248±.006 (6.3±0.15)	.018±.008 (0.45±0.2)	.030±.006 (0.75±0.15)	

### Derating Curve

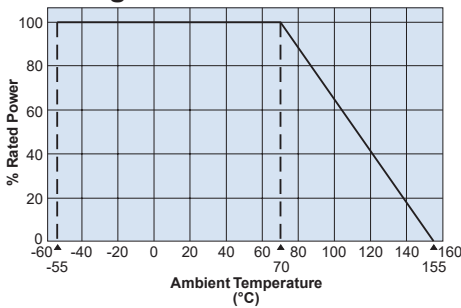


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

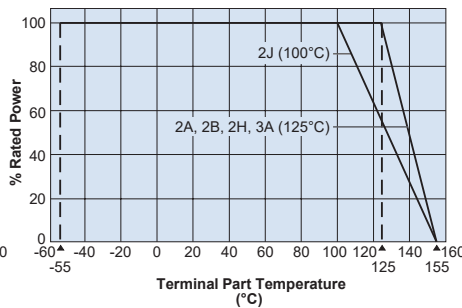

For resistors operated terminal temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

When using Power Rating<sup>1</sup>, please use the derating curves based on the terminal part temperature on the right side.

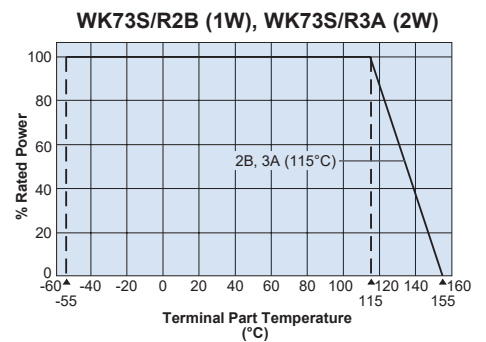

### ordering information

<b>WK73R</b>	<b>R2B</b>	<b>RT</b>	<b>TD</b>	<b>10R0</b>	<b>F</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance*</b>	<b>Resistance Tolerance</b>
WK73S WK73R	NEW 2A: 0.75W, 1W 2B: 0.75W, 1W 2H: 1W 2J: 1W 3A: 1.5W, 2W	RT : Sn	TD: 4mm pitch punched paper TE: 4mm pitch embossed plastic For further information on packaging, please refer to Appendix A	±1%: 4 digits ±5%: 3 digits	F: ±1% J: ±5%

\* Resistance value, 3 digits:  
1~9.1Ω, 1R0~9R1  
Resistance value, 4 digits:  
1~9.76Ω, 1R00~9R76

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

6/27/18

### applications and ratings

Part Designation	Power Rating	Rated Ambient Temperature	Rated Terminal Part Temperature	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range (Ω)		Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range			
					F±1% E-24 • E-96	J±5% E-24						
NEW WK73S2A	1.0W <sup>1</sup>	—	125°C	±100	1 ~ 9.76	1 ~ 9.1	200V	400V	-55°C to +155°C			
	0.75W	—	125°C	±100	20.5k ~ 1M	22k ~ 1M						
WK73R2A	1.0W <sup>1</sup>	—	125°C	±100	10 ~ 20k	10 ~ 20k						
	0.75W	70°C	115°C	±100	1 ~ 9.76	1 ~ 9.1						
WK73S2B	1.0W <sup>1</sup>	—	115°C	±100	1 ~ 9.76	1 ~ 9.1						
				±150	0.3 ~ 0.976	0.3 ~ 0.91						
WK73R2B	0.75W	70°C	125°C	±100	10 ~ 9.76k	10 ~ 9.1k						
				±200	10k ~ 1M	10k ~ 1M						
	1.0W <sup>1</sup>	—	115°C	±100	10 ~ 9.76k	10 ~ 9.1k						
WK73S2H	1.0W	70°C	125°C	±100	1 ~ 9.76	1 ~ 9.1				200V	400V	
				±150	0.2 ~ 0.976	0.2 ~ 0.91						
WK73R2H	1.0W	70°C	125°C	±100	10 ~ 430k	10 ~ 430k						
				±200	432k - 1M	470k - 1M						
WK73S2J	1.0W	70°C	100°C	±100	1 ~ 9.76	1~9.1						
WK73R2J	1.0W	70°C	100°C	±100	10 ~ 510k	10 ~ 510k						
				±200	511k ~ 1M	560k ~ 1M						
WK73S3A	1.5W	70°C	125°C	±100	1 ~ 9.76	1 ~ 9.1	200V	400V				
	2.0W <sup>1</sup>	—	115°C	±100	1 ~ 9.76	1 ~ 9.1						
WK73R3A	1.5W	70°C	125°C	±100	10 ~ 330k	10 ~ 330k						
				±200	332k - 1M	360k - 1M						
	2.0W <sup>1</sup>	—	115°C	±100	10 ~ 330k	10 ~ 330k						
				±200	332k - 1M	360k - 1M						

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

<sup>1</sup> When using Power Rating, please use the derating curves based on the terminal part temperature on the right side of the graph located on the previous page.

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature", please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to the "Introduction of the derating curves based on the terminal part temperature" in the beginning of the catalog.

## environmental applications

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.005\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.2%	WK732B, S2H, R2H, S2J, R2J: Rated voltage x 2.5 for 5 seconds WK73S/R2A (0.75W, 1W), WK73S/R2B (1W), WK73S/R3A (2W): Rated voltage x 2.0 for 5 seconds
Resistance to Solder Heat	±1%	±0.2%	260°C ± 5°C, 10 seconds ± 1 second
Bending Test	±1%	±0.1%	Holding point 90mm, Bending 1 time, Bending 5mm
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±0.2%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.2%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.2%	+155°C, 1000 hours
Sulfuration Test	±5%	±0.2%	Soaked in industrial oil with 3.5% sulfur concentration 105°C ± 3°C, 500 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/17/18

## features


- Anti-sulfuration type, wide-side termination (reverse-geometry) type flat chip resistor
- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Suitable for both flow and reflow solderings
- This products meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

## dimensions and construction

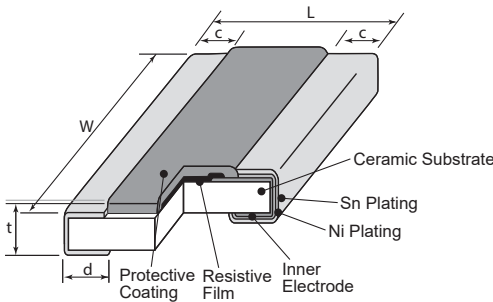

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>NEW</b> 2B15 (0612)	$.063 \pm .008$ ( $1.6 \pm .02$ )	$.126 \pm .012$ ( $3.2 \pm .3$ )	$.012 \pm .008$ ( $0.3 \pm 0.2$ )	$.018 \pm .006$ ( $0.45 \pm 0.15$ )	$.024 \pm .004$ ( $0.6 \pm 0.1$ )
2H2 (1020)	$.098 \pm .008$ ( $2.5 \pm .02$ )	$.197 \pm .008$ ( $5.0 \pm .2$ )	$.016 \pm .008$ ( $0.4 \pm 0.2$ )	$.030 \pm .006$ ( $0.75 \pm 0.15$ )	$.024 \pm .004$ ( $0.6 \pm 0.1$ )
3A3 (1225)	$.122 \pm .004$ ( $3.1 \pm .01$ )	$.248 \pm .006$ ( $6.3 \pm 0.15$ )	$.018 \pm .008$ ( $0.45 \pm 0.2$ )	$.030 \pm .006$ ( $0.75 \pm 0.15$ )	$.024 \pm .004$ ( $0.6 \pm 0.1$ )

## Derating Curve

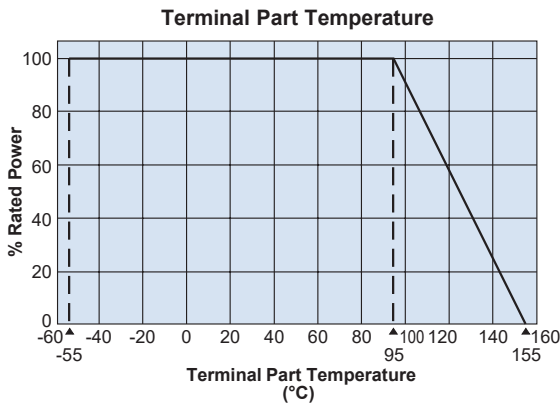

For resistors operated terminal temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

## ordering information

<b>WK73R</b>	<b>2B15</b>	<b>RT</b>	<b>TD</b>	<b>10R0</b>	<b>F</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
WK73S WK73R	NEW 2B15: 1.5W 2H2: 2W 3A3: 3W	RT : Sn	TD: 0612: 7" 4mm pitch punched paper TE: 1020, 1225: 7" 4mm pitch embossed plastic For further information on packaging, please refer to Appendix A	$\pm 1\%$ : 3 significant figures + 1 multiplier "R" indicates decimal on value <100 $\Omega$ $\pm 5\%$ : 2 significant figures + 1 multiplier "R" indicates decimal on values <10 $\Omega$	F: $\pm 1\%$ J: $\pm 5\%$




### applications and ratings

Part Designation	Power Rating	Rated Terminal Part Temperature	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range (Ω)		Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
				F±1% E-24 • E-96	J±5% E-24			
NEW WK73S2B15	1.5W	95°C	±100	1 ~ 9.76	1 ~ 9.1	200V	400V	-55°C to +155°C
			±150	0.3 ~ 0.976	0.3 ~ 0.91			
WK73R2B15	1.5W	95°C	±100	10 ~ 9.76k	10 ~ 9.1k	200V	400V	
			±100	1 ~ 9.76	1 ~ 9.1			
WK73S2H2RT	2.0W	95°C	±100	0.2 ~ 0.976	0.2 ~ 0.91	200V	400V	
			±150	10 ~ 430k	10 ~ 430k			
WK73R2H2RT	2.0W	95°C	±100	432k - 1M	470k - 1M	200V	400V	
			±200	1 ~ 9.76	1 ~ 9.1			
WK73S3A3RT	3.0W	95°C	±100	10 ~ 330k	10 ~ 330k	200V	400V	
			±200	332k - 1M	360k - 1M			

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

### environmental applications

#### Device Temperature Data

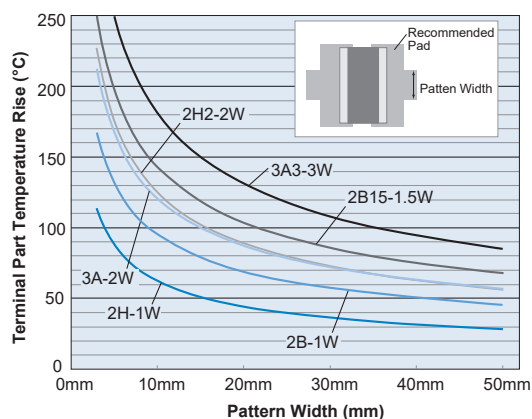

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.005\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.2%	Rated voltage x 2.0 for 5 seconds
Resistance to Solder Heat	±1%	±0.2%	260°C ± 5°C, 10 seconds ± 1 second
Bending Test	±1%	±0.1%	Holding point 90mm, Bending 1 time, Bending 5mm
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±0.2%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.2%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.2%	+155°C, 1000 hours
Sulfuration Test	±5%	±0.2%	Soaked in industrial oil with 3.5% sulfur concentration 105°C ± 3°C, 500 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/17/18

## features

- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material/pulse
- Superior to RK73 series chip resistors in pulse withstanding voltage
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

## dimensions and construction

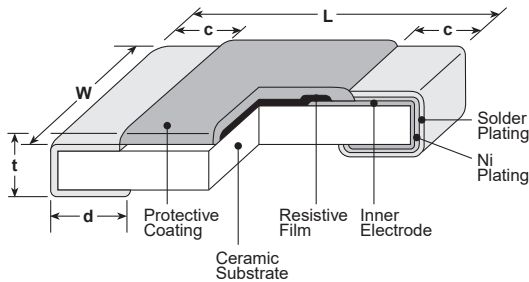

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>SG73 1J (0603)</b>	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>SG73 2A (0805)</b>	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+.008</sup> <sub>-.004</sub> (0.3 <sup>+.02</sup> <sub>-.01</sub> )	.02±.004 (0.5±0.1)
<b>SG73 2B (1206)</b>	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+.008</sup> <sub>-.004</sub> (0.4 <sup>+.02</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)
<b>SG73 2E (1210)</b>		.102±.008 (2.6±0.2)			
<b>SG73 W2H (2010)</b>	.197±.008 (5.0±0.2)	.098±.008 (2.5±0.2)		.026±.006 (0.65±0.15)	
<b>SG73 W3A (2512)</b>	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)			

## ordering information

SG73	2A	RT	TD	103	K
Type	Power Rating	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance
SG73	1J 2A 2B 2E W2H W3A	RT: Sn Anti-Sulfur	TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210, 2010 & 2512: 7" embossed plastic TED: 0805, 1206, 1210, 2010 & 2512: 10" embossed plastic For further information on packaging, please refer to Appendix A	±10%, ±20%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω	K: ±10% M: ±20%

### applications and ratings



Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range K: ±10% M: ±20% E-12	Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range
SG73 1J (0603)	0.1W	70°C	125°C	±400	1Ω - 8.2Ω	50V	100V	-55°C to +155°C
				±200	10Ω - 1MΩ			
SG73 2A (0805)	0.125W	70°C	125°C	±400	1Ω - 8.2Ω	150V	200V	
				±200	10Ω - 1MΩ			
SG73 2B (1206)	0.33W	70°C	125°C	±400	1Ω - 8.2Ω	200V	400V	
				±200	10Ω - 1MΩ			
SG73 2E (1210)	0.50W	70°C	125°C	±400	1Ω - 8.2Ω			
				±200	10Ω - 1MΩ			
SG73 W2H (2010)	0.75W	70°C	125°C	±400	1Ω - 8.2Ω			
				±200	10Ω - 1MΩ			
SG73 W3A (2512)	1W	70°C	125°C	±400	1Ω - 8.2Ω			
				±200	10Ω - 1MΩ			

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

### environmental applications

#### Derating Curve

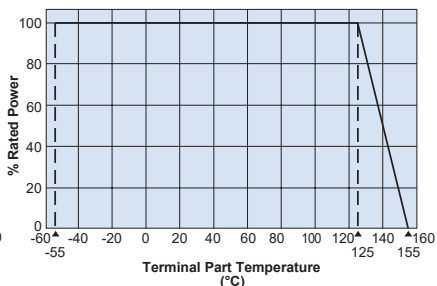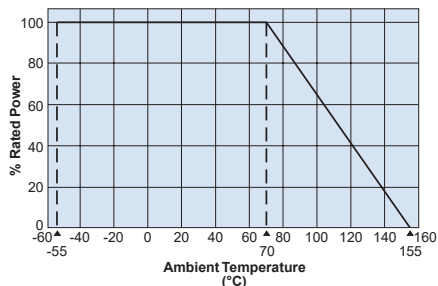


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

#### One-Pulse Limiting Electric Power

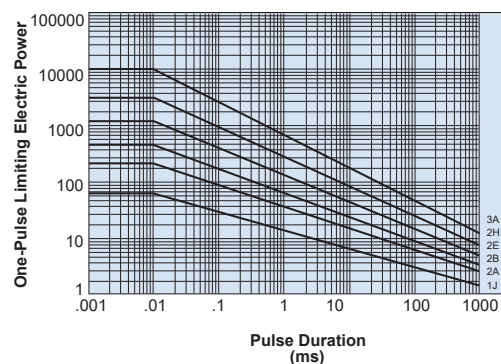

The maximum applicable voltage is equal to the max. overload voltage. Please contact factory for resistance characteristics of continuous applied pulse.

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated Voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1%	±0.75%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±3%	±0.75%	40°C ± 2°C, 90%~95%RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±3%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	+155°C, 1000 hours
Sulfuration Test	±5%	±0.2%	Soaked in industrial oil with 3.5% sulfur concentration 105°C ± 3°C, 500 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


11/06/18

### features

- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Superior to RK73 series chip resistors in pulse withstanding voltage and high power
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified




### dimensions and construction

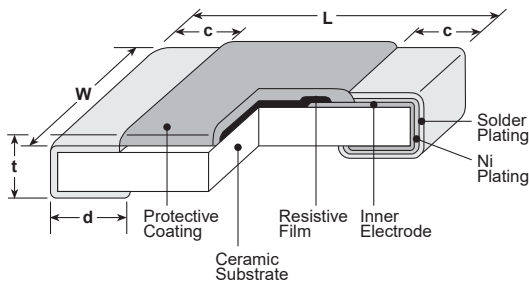

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
SG73P 1E (0402)	.039 <sup>+0.004</sup> <sub>-.002</sub> (1.0 <sup>+0.1</sup> <sub>-0.05</sub> )	.020±.002 (0.5±0.05)	.006±.004 (0.15±0.1)	.010 <sup>+0.002</sup> <sub>-.004</sub> (0.25 <sup>+0.05</sup> <sub>-0.1</sub> )	.014±.002 (0.35±0.05)
SG73P 1J (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
SG73P 2A (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.020±.004 (0.5±0.1)
SG73P 2B (1205)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)
NEW SG73P 2E SG73P 2E1 (1210)		.102±.008 (2.6±0.2)			

### One-Pulse Limiting Electric Power

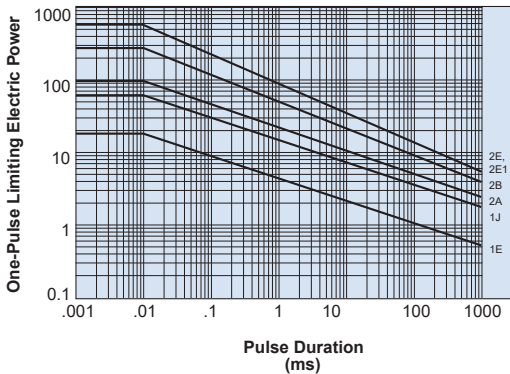

The maximum applicable voltage is equal to the max. overload voltage. Please contact factory for the resistance characteristics of continuous applied pulse.

### ordering information

<b>SG73P</b>	<b>2A</b>	<b>RT</b>	<b>TD</b>	<b>103</b>	<b>J</b>
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
SG73P	1E 1J 2A 2B 2E NEW 2E1	RT: Sn Anti-Sulfur	TP: 0402, 0603, 0805: 7" 2mm pitch punch paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210: 7" embossed plastic TED: 0805, 1206, 1210: 10" embossed plastic For further information on packaging, please refer to Appendix A	±0.5%, ±1%: 3 significant figures + 1 multiplier ±2%, ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω	D: ±0.5% F: ±1% G: ±2% J: ±5%

### applications and ratings

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range				Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range																									
					D: ±0.5% E-24, E-96	F: ±1% E-24, E-96	G: ±2% E-24	J: ±5% E-24																												
SG73P 1E	0.125W	70°C	125°C	±200	100Ω - 1MΩ	10Ω - 1MΩ	10Ω - 10MΩ	1Ω - 10MΩ	75V	100V	-55°C to +155°C																									
	0.2W* <sup>2</sup>	—	105°C																																	
SG73P 1J	0.2W	70°C	125°C	±100* <sup>1</sup>					100Ω - 1MΩ	10Ω - 1MΩ		10Ω - 10MΩ	1Ω - 10MΩ	150V	200V	-55°C to +155°C																				
	0.33W* <sup>2</sup>	—	—																																	
SG73P 2A	0.25W	70°C	125°C	±200										100Ω - 1MΩ	10Ω - 1MΩ		10Ω - 10MΩ	1Ω - 10MΩ	400V	600V (800V)* <sup>3</sup>	-55°C to +155°C															
	0.5W* <sup>2</sup>	—	100°C																																	
SG73P 2B	0.33W	70°C	125°C	±200															100Ω - 1MΩ	10Ω - 1MΩ		10Ω - 10MΩ	1Ω - 10MΩ	200V	400V	-55°C to +155°C										
	0.75W* <sup>2</sup>	—	105°C																																	
SG73P 2E	0.5W	70°C	125°C	±200																				100Ω - 1MΩ	10Ω - 1MΩ		10Ω - 10MΩ	1Ω - 10MΩ	200V	400V	-55°C to +155°C					
	0.75W* <sup>2</sup>	—	110°C																																	
SG73P 2E1	1.0W* <sup>2</sup>	—	95°C	±200																									100Ω - 1MΩ	10Ω - 1MΩ		10Ω - 10MΩ	1Ω - 10MΩ	200V	400V	-55°C to +155°C


\*<sup>1</sup> Cold T.C.R. (-55°C ~ +25°C) is  $\pm 150 \times 10^{-6} / K$  \*<sup>2</sup> If you want to use the rated power of \*<sup>2</sup>, \*<sup>3</sup> please reference below. \*<sup>3</sup> Applies when power rating is 0.4W or lower.

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower


If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog. Also, contact KOA prior to usage and for the max. working voltage and max. overload voltage.

### environmental applications

#### Derating Curve

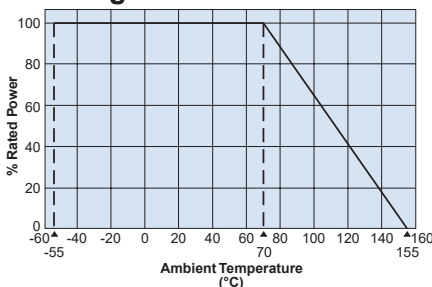


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

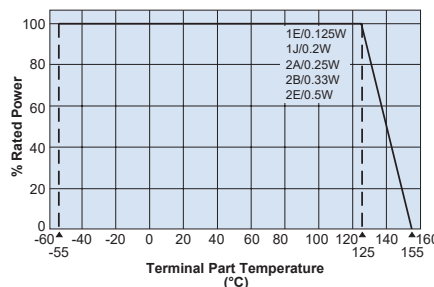

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

\*<sup>2</sup>, \*<sup>3</sup> If you want to use the rated power of \*<sup>2</sup>, \*<sup>3</sup> please use the derating curve based on the terminal part temperature on the right hand side.

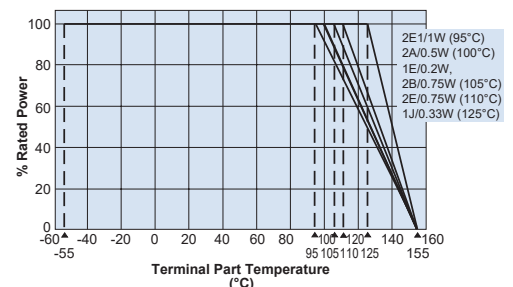

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated Voltage x 2.5 for 5 seconds (2A: 0.4W, 0.5W; 2B: 0.75W; 2E: 0.75W; 2E1: 1W x 2 for 5 seconds)
Resistance to Solder Heat	±1%	±0.75%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±3%	±0.75%	40°C ± 2°C, 90%~95%RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±3%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	+155°C, 1000 hours
Sulfuration Test	±5%	±0.2%	Soaked in industrial oil with 3.5% sulfur concentration 105°C ± 3°C, 500 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18






### features

- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Superior to RK73 series chip resistors in pulse withstanding voltage and high power
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

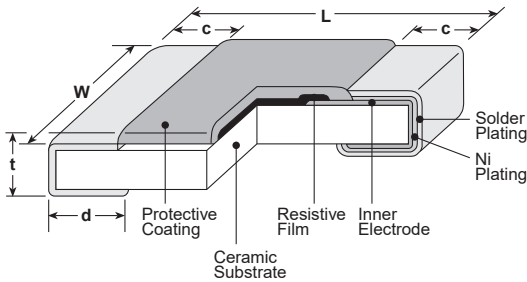

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>SG73S 1E, (0402)</b>	.039 <sup>+0.004</sup> / <sub>-0.002</sub> (1.0 <sup>+0.1</sup> / <sub>-0.05</sub> )	.020±.002 (0.5±0.05)	.006±.004 (0.15±0.1)	.010 <sup>+0.002</sup> / <sub>-0.004</sub> (0.25 <sup>+0.05</sup> / <sub>-0.1</sub> )	.014±.002 (0.35±0.05)
<b>SG73S 1J, (0603)</b>	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>SG73S 2A, (0805)</b>	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.012 <sup>+0.008</sup> / <sub>-0.004</sub> (0.3 <sup>+0.2</sup> / <sub>-0.1</sub> )	.012 <sup>+0.008</sup> / <sub>-0.004</sub> (0.3 <sup>+0.2</sup> / <sub>-0.1</sub> )	.020±.004 (0.5±0.1)
<b>SG73S 2B, (1205)</b>	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.016 <sup>+0.008</sup> / <sub>-0.004</sub> (0.4 <sup>+0.2</sup> / <sub>-0.1</sub> )	.016 <sup>+0.008</sup> / <sub>-0.004</sub> (0.4 <sup>+0.2</sup> / <sub>-0.1</sub> )	.024±.004 (0.6±0.1)
<b>NEW SG73S 2E, SG73S 2E1 (1210)</b>		.102±.008 (2.6±0.2)			

### ordering information

SG73S	2A	RT	TD	103	J
Type	Power Rating	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance
SG73S	1E 1J 2A 2B 2E NEW 2E1	RT: Sn Anti-Sulfur	TP: 0402, 0603, 0805: 7" 2mm pitch punch paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210: 7" embossed plastic TED: 0805, 1206, 1210: 10" embossed plastic For further information on packaging, please refer to Appendix A	±0.5%, ±1%: 3 significant figures + 1 multiplier ±2%, ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω	D: ±0.5% F: ±1% G: ±2% J: ±5%

### applications and ratings

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range				Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range				
					D: ±0.5% E-24, E-96	F: ±1% E-24, E-96	G: ±2% E-24	J: ±5% E-24							
SG73S 1E	0.125W	70°C	125°C	±200	100Ω - 1MΩ	10Ω - 1MΩ	10Ω - 10MΩ	1Ω - 10MΩ	75V	100V	-55°C to +155°C				
	0.2W*2	—	105°C												
SG73S 1J	0.2W	70°C	125°C	±100*1					150V	200V					
	0.33W*2	—	—												
SG73S 2A	0.25W	70°C	125°C	±200					400V	600V (800V)*3					
	0.5W*2	—	100°C												
SG73S 2B	0.33W	70°C	125°C	±200					200V	400V					
	0.75W*2	—	105°C												
SG73S 2E	0.5W	70°C	125°C	±200					200V	400V					
	0.75W*2	—	110°C												
SG73S 2E1	1.0W*2	—	95°C	±200											




\*1 Cold T.C.R. (-55°C ~ +25°C) is  $\pm 150 \times 10^{-6} / \text{K}$  \*2 If you want to use the rated power of \*2, \*3 please reference below. \*3 Applies when power rating is 0.4W or lower.

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog. Also, contact KOA prior to usage and for the max. working voltage and max. overload voltage.

### environmental applications

#### Derating Curve

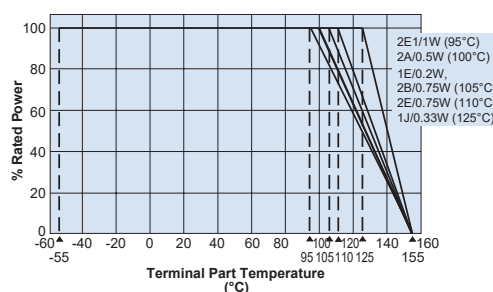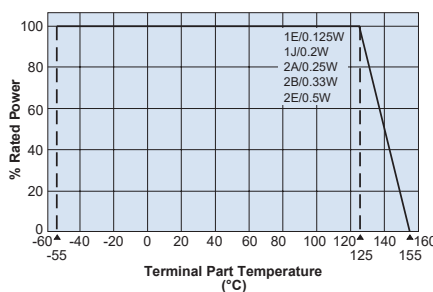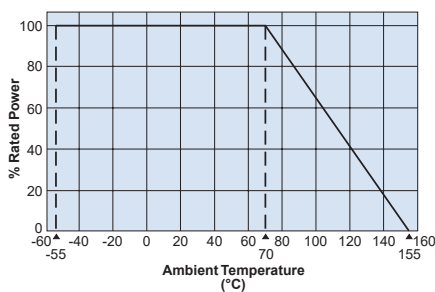

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

\*2, \*3 If you want to use the rated power of \*2, \*3, please use the derating curve based on the terminal part temperature on the right hand side.


Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18

### environmental applications (continued)

#### ESD Limiting Voltage

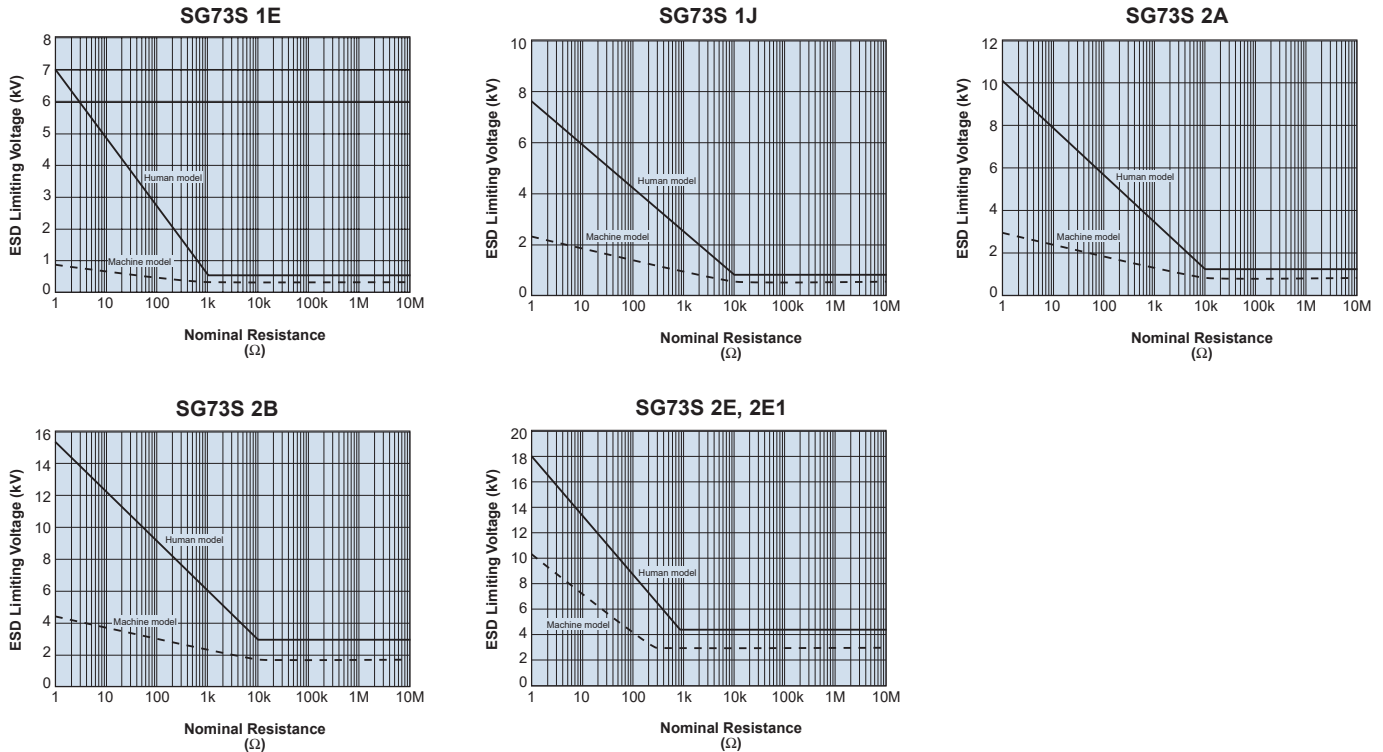


#### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated Voltage x 2.5 for 5 seconds (2A: 0.4W, 0.5W; 2B: 0.75W; 2E: 0.75W; 2E1: 1W x 2 for 5 seconds)
Resistance to Solder Heat	±1%	±0.75%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±3%	±0.75%	40°C ± 2°C, 90%~95%RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±3%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	+155°C, 1000 hours
Sulfuration Test	±5%	±0.2%	Soaked in industrial oil with 3.5% sulfur concentration 105°C ± 3°C, 500 hours

### features

- Superior to RK73 series in maximum working voltage
- Suitable for flow and reflow solderings
- Products meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- Excellent anti-sulfuration characteristics due to using high sulfuration-proof inner top electrode material

### dimensions and construction

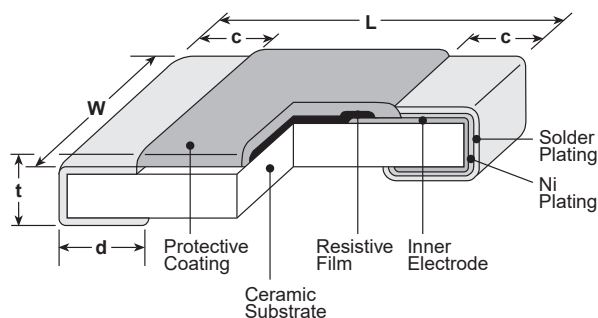

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-.01</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)
<b>2H</b> (2010)	.197±.008 (5.0±0.2)	.098±.008 (2.5±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)
<b>3A</b> (2512)	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)

### ordering information

<b>HV73</b>	<b>2B</b>	<b>RT</b>	<b>TD</b>	<b>1004</b>	<b>F</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
	1J: 0.1W 2A: 0.25W 2B: 0.25W 2H: 0.5W 3A: 1W	RT: Sn	TD: 7" 4mm pitch punched paper TE: 7" 4mm pitch embossed plastic For further information on packaging, please refer to Appendix A	±0.5%, ±1%: 3 significant figures +1 multiplier ±2%, ±5%: 2 significant figures + 1 multiplier	D: ±0.5% F: ±1% G: ±2% J: ±5%

### applications and ratings

Part Designation	Power Rating @ 70°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range (Ω)				Maximum Working Voltage	Maximum Overload Voltage (D.C.)*	Operating Temperature Range
					E-24/E-96 (D±0.5%)	E-24/E-96 (F±1%)	E-24 (G±2%)	E-24 (J±5%)			
1J	0.1W	70°C	80°C	±100**	—	10k - 10M	10k - 10M	10k - 10M	350V	500V*	-55°C to +155°C
2A	0.25W	70°C	100°C	±100	100k - 1M	100k - 10M	100k - 10M	100k - 10M	400V	800V*	
				±200	—	—	—	11M - 51M			
2B	0.25W	70°C	100°C	±100	100k - 1M	100k - 10M	100k - 10M	100k - 10M	800V	1000V*	
				±200	—	—	—	11M - 51M			
2H	0.5W	70°C	90°C	±100	100k - 1M	100k - 10M	100k - 10M	100k - 10M	2000V (D.C.)	3000V*	
				±200	—	—	—	11M - 51M			
3A	1W	70°C	105°C	±100	43k - 1M	43k - 10M	43k - 10M	43k - 10M	3000V (D.C.)	4000V*	
				±200	—	10.2M - 20M	11M - 20M	11M - 51M			


Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

\* Maximum Overload Voltage is specified by D.C. voltage      \*\* Cold T.C.R. (-55°C ~ +25°C) of 1.02MΩ ~ 10MΩ is +200x10<sup>-6</sup>/K


If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

### environmental applications

#### Derating Curve

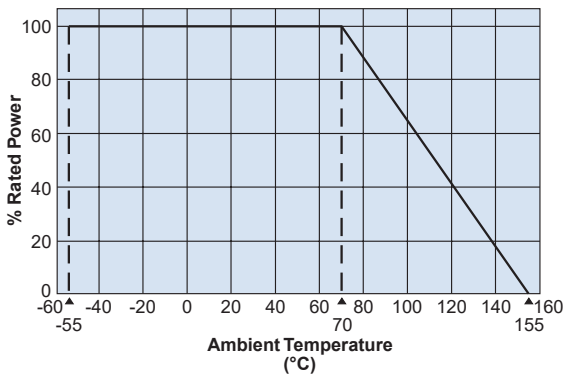

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

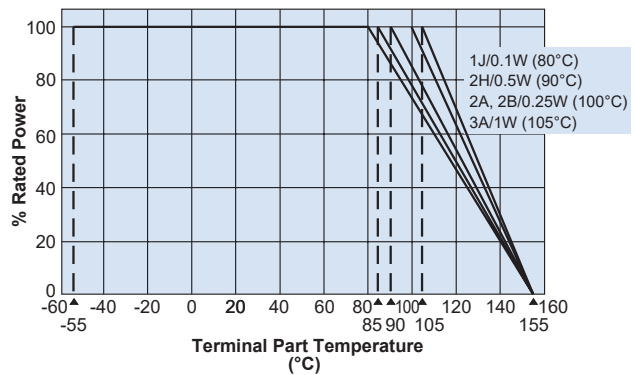

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the above derating curve.

Please refer to "Introduction of the derating curves based on the terminal part temperature" in the beginning of our catalog before use.

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated Voltage (D.C.) x 2.5 for 5 seconds
Resistance to Solder Heat	±1%	±0.5%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%: (10kΩ≤R≤10MΩ) ±1%: (11MΩ≤R≤51MΩ)	±0.3%: (10kΩ≤R≤10MΩ) ±0.5%: (11MΩ≤R≤51MΩ)	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±0.75%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±2%	±0.3%	+155°C, 1000 hours
Sulfuration Test	±5%	±0.2%	Soaked in industrial oil with 3.5% sulfur concentration 105°C ± 3°C, 500 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


11/06/18



### features

- Superior to RK73 series in maximum working voltage
- Suitable for flow and reflow solderings
- Products meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Suitable for high reliable applications like automotives
- AEC-Q200 qualified

### dimensions and construction

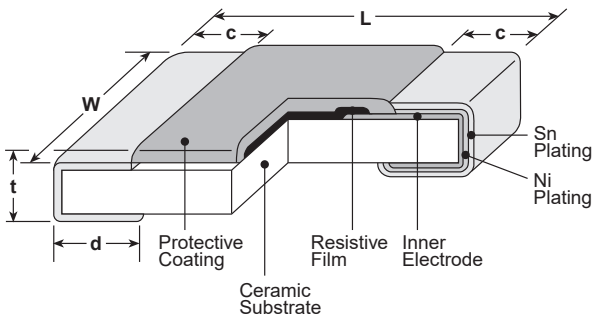

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)

### ordering information

HV73V	2A	RT	TD	104	J
Type	Size	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance
HV73V	1J: 0.1W 2A: 0.25W 2B: 0.25W	T: Sn	TD: 7" 4mm pitch punched paper TE: 7" 4mm pitch embossed plastic For further information on packaging, please refer to Appendix A	±0.5%, ±1%: 3 significant figures + 1 multiplier ±2%, ±5%: 2 significant figures + 1 multiplier	D: ±0.5% F: ±1% G: ±2% J: ±5%

## applications and ratings

Part Designation	Power Rating @ 70°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range (Ω)				Maximum Working Voltage	Maximum Overload Voltage (D.C.)*	Operating Temperature Range
					E-24/E-96 (D±0.5%)	E-24/E-96 (F±1%)	E-24 (G±2%)	E-24 (J±5%)			
HV73V1J	0.1W	70°C	80°C	±100**	—	10k - 10M	10k - 10M	10k - 10M	350V	500V*	-55°C to +155°C
HV73V2A	0.25W	70°C	100°C	±100	100k - 1M	100k - 10M	100k - 10M	100k - 10M	400V	800V*	
				±200	—	—	—	11M - 51M			
HV73V2B	0.25W	70°C	100°C	±100	100k - 1M	100k - 10M	100k - 10M	100k - 10M	800V	1000V*	
				±200	—	—	—	11M - 51M			


Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

\* Maximum Overload Voltage is specified by D.C. voltage    \*\* Cold T.C.R. (-55°C ~ +25°C) of 1.02MΩ ~ 10MΩ is +200x10<sup>-6</sup>/K


If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

## environmental applications

### Derating Curve

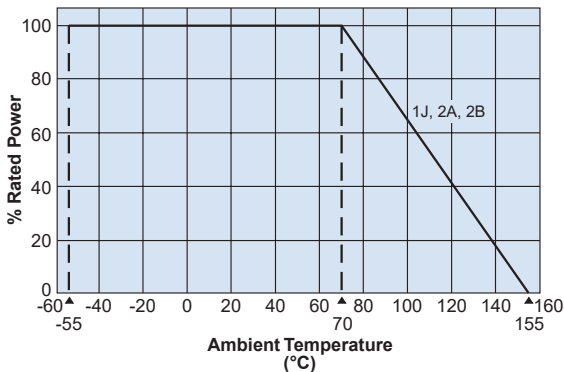

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

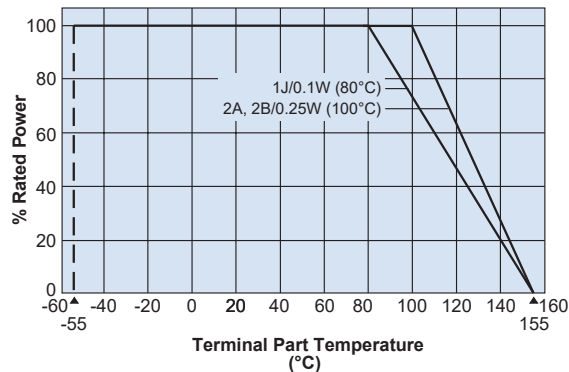

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the above derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated Voltage (D.C.) x 2.5 for 5 seconds
Resistance to Solder Heat	±1%	±0.5%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%: (10kΩ≤R≤10MΩ) ±1%: (11MΩ≤R≤51MΩ)	±0.3%: (10kΩ≤R≤10MΩ) ±0.5%: (11MΩ≤R≤51MΩ)	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±0.75%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±2%	±0.3%	+155°C, 1000 hours
Sulfuration Test	±5%	±0.2%	Soaked in industrial oil with sulfur substance 3.5% contained 105°C ± 3°C, 500 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/06/18


## low resistance flat chip resistors (anti sulfuration)



### features


- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Current detecting resistors for power supply, motor circuits, etc
- High reliability and performance with resistance tolerance  $\pm 1.0\%$ , T.C.R.  $\pm 100 \times 10^{-6}/K$
- Suitable for both reflow and flow solderings
- Products with lead free termination meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

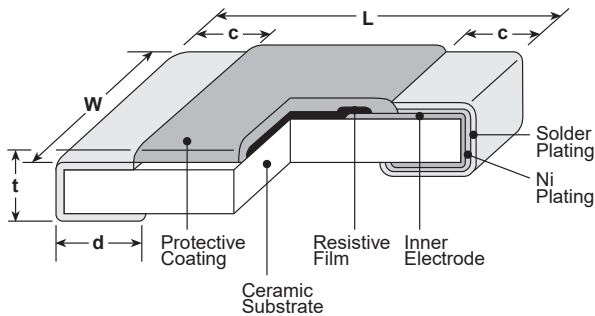


NEW	Type (Inch Size Code)	Resistance Range	Dimensions inches (mm)				
			L	W	c	d	t
	1E (0402)	1 - 10	.039 <sup>+0.006</sup> <sub>-.004</sub> (1.0 <sup>+0.1</sup> <sub>-0.05</sub> )	.020 <sup>+0.006</sup> <sub>-.004</sub> (0.5 <sup>+0.1</sup> <sub>-0.05</sub> )	.008±.004 (0.2±0.1)	.010±.004 (0.25±0.1)	.014±.002 (0.35±0.05)
	1J (0603)	0.1 - 0.43	.063±.008 (1.6±0.2)	.031 <sup>+0.006</sup> <sub>-.004</sub> (0.8 <sup>+0.15</sup> <sub>-0.1</sub> )	.016±.004 (0.4±0.1)	.018±.004 (0.45±0.1)	.018±.004 (0.45±0.1)
		0.47 - 10			.014±.004 (0.35±0.1)	.014±.004 (0.35±0.1)	
	2A (0805)	0.1 - 0.43	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.02±.004 (0.5±0.1)
		0.47 - 10				.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	
	2B (1206)	0.1 - 0.43	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.02 <sup>+0.008</sup> <sub>-.004</sub> (0.5 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)
		0.47 - 10				.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	
	2E (1210)	0.1 - 0.39	.126±.008 (3.2±0.2)	.102±.008 (2.6±0.2)	.02±.012 (0.5±0.3)	.02 <sup>+0.008</sup> <sub>-.004</sub> (0.5 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)
		0.43 - 10				.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	

### Derating Curve

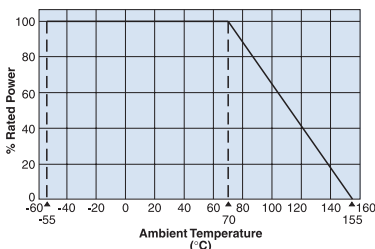


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

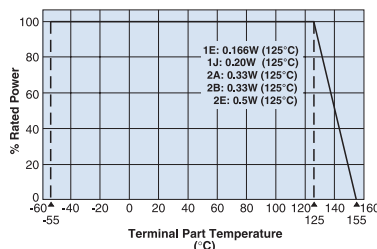

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### SR73 2A (0.5W), SR73 2B (0.5W), SR73 2E (0.66W)

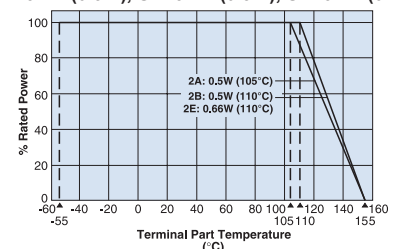

### ordering information

SR73	2B	RT	TD	R10	J
Type	Size	Termination Material	Packaging	Nominal Resistance	Tolerance
	NEW 1E: 0.166W 1J: 0.2W 2A: 0.33W, 0.5W 2B: 0.33W, 0.5W 2E: 0.5W, 0.66W	RT: Sn	TD: 7" 4mm pitch punch paper TP: 0402 only, 7" 2mm pitch paper TPL: 0402 only, 2mm pitch paper For further information on packaging, please refer to Appendix A	$\pm 2\%$ , $\pm 5\%$ : 2 significant figures + 1 multiplier "R" indicates decimal on values $< 10\Omega$ $\pm 1\%$ : 3 significant figures + 1 multiplier "R" indicates decimal on values $< 100\Omega$	F: $\pm 1\%$ G: $\pm 2\%$ J: $\pm 5\%$

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

6/28/18

### applications and ratings

NEW	Part Designation	Power Rating	Rated Ambient Temperature	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range			Operating Temperature Range
						F (±1%) E-24, E-96 <sup>1</sup>	G (±2%) E-24	J (±5%) E-24	
	SR731ERT (0402)	0.166W	70°C	125°C	±200	1Ω - 10Ω	1Ω - 10Ω	1Ω - 10Ω	-55°C to +155°C
	SR731JRT (0603)	0.2W	70°C	125°C	±200	0.2Ω - 10Ω	0.2Ω - 10Ω	0.2Ω - 10Ω	
	SR732ART (0805)	0.33W	70°C	125°C	±300	0.1Ω - 0.18Ω	0.1Ω - 0.18Ω	0.1Ω - 0.18Ω	
					±100	0.47Ω - 10Ω	—	—	
					±200	0.2Ω - 0.43Ω	0.2Ω - 10Ω	0.2Ω - 10Ω	
	SR732BRT (1206)	0.33W	70°C	125°C	±250	0.1Ω - 0.18Ω	0.1Ω - 0.18Ω	0.1Ω - 0.18Ω	
					±100	0.47Ω - 10Ω	—	—	
					±200	0.2Ω - 0.43Ω	0.2Ω - 10Ω	0.2Ω - 10Ω	
	SR732ERT (1210)	0.5W	70°C	125°C	±250	0.1Ω - 0.18Ω	0.1Ω - 0.18Ω	0.1Ω - 0.18Ω	
					±100	0.47Ω - 10Ω	—	—	
					±200	0.2Ω - 0.43Ω	0.2Ω - 10Ω	0.2Ω - 10Ω	
	SR732ERT (1210)	0.5W	70°C	125°C	±250	0.1Ω - 0.18Ω	0.1Ω - 0.18Ω	0.1Ω - 0.18Ω	
					±100	0.43Ω - 10Ω	—	—	
					±200	0.2Ω - 0.39Ω	0.2Ω - 10Ω	0.2Ω - 10Ω	
	SR732ERT (1210)	0.66W*	—	110°C	±250	—	—	0.1Ω - 0.18Ω	
					±100	0.43Ω - 10Ω	—	—	
					±200	0.2Ω - 0.39Ω	0.2Ω - 10Ω	0.2Ω - 10Ω	
	SR732ERT (1210)	0.66W*	—	110°C	±250	—	—	0.1Ω - 0.18Ω	
					±100	0.43Ω - 10Ω	—	—	
					±200	0.2Ω - 0.39Ω	0.2Ω - 10Ω	0.2Ω - 10Ω	

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

<sup>1</sup> The nominal resistance for SR731E (F:±1%), SR731J, 2A, 2B (0.1~0.43) and SR732E (0.1~0.39) is E-24 only

\* Please use the derating curve based on the terminal part temperature in graph below.

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.


### environmental applications

#### Performance Characteristics


Parameter	Requirement $\Delta R \pm(\%+0.005\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1%	±0.3%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±1%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±1%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	+155°C, 1000 hours
Sulfuration Test	±5%	±0.2%	Soaked in industrial oil with sulfur substance 3.5% contained, 105°C ± 3°C, 500 hours

### features

- Interlayer embedding in the multilayer substrate is applicable from the height of 0.13 to 0.14mm
- Cu via hole connection is applicable by the Cu electrode

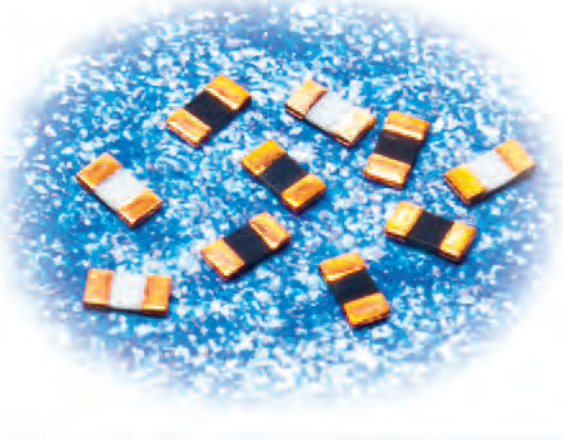

### dimensions and construction

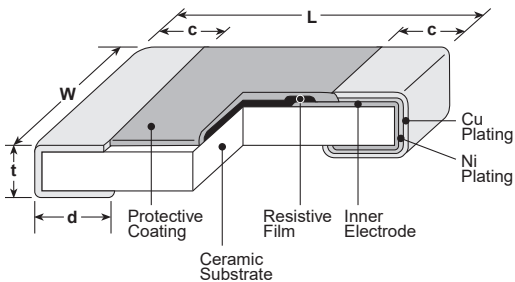

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1H</b> (0201)	.024±.001 (0.6±0.03)	.012±.001 (0.3±0.03)	.009±.001 (0.23±0.03)	.009±.001 (0.23±0.03)	.005±.001 (0.13±0.02)
<b>1E</b> (0402)	.039±.002 (1.0±0.05)	.020±.002 (0.5±0.05)	.011±.002 (0.28±0.05)	.011±.002 (0.28±0.05)	.006±.001 (0.14±0.03)

### ordering information

<b>XR73H</b>	<b>1E</b>	<b>U</b>	<b>TWL</b>	<b>1001</b>	<b>F</b>
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
XR73B XR73H	1H, 1E: 0.063W	U: CU	TWL: 2mm pitch plastic embossed TWA: 1mm pitch plastic embossed (1H only) For further information on packaging, please refer to Appendix A	±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω	F: ±1% J: ±5%
<b>XR73Z</b>	<b>1E</b>	<b>U</b>	<b>TWL</b>		
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Packaging</b>		
XR73Z	1H, 1E: 1A	U: CU	TWL: 2mm pitch plastic embossed TWA: 1mm pitch plastic embossed (1H only) For further information on packaging, please refer to Appendix A		



## applications and ratings

### XR73B, XR73H

Part Designation	Power Rating*	Rated Ambient Temp.	T.C.R. (x10 <sup>-6</sup> /K) Max.	Resistance Range		Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temp. Range
				XR73H F: ±1% E24, E96	XR73B J: ±5% E24			
1H	0.063W	70°C	±200	10Ω~1MΩ	10Ω~10MΩ	50V	100V	-55°C to +155°C
			±400	1.0Ω~9.1Ω**	1.0Ω~9.1Ω			
1E	0.063W	70°C	±100	10Ω~1MΩ	—	50V	100V	-55°C to +155°C
			±200	1.0Ω~9.76Ω 1.02MΩ~10MΩ	1.0Ω~10MΩ			

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

\* The ratings will be for the surface mounted condition

\*\* The nominal resistance value for XR73H1H ( $1\Omega \leq R \leq 9.1\Omega$ ) is E24


### XR73Z

Part Designation	Resistance	Current Rating*	Rated Ambient Temp.	Maximum Overload Current	Operating Temp. Range
1H	50mΩ max.	1A	70°C	2A	-55°C to +155°C
1E	50mΩ max.	1A	70°C	2A	-55°C to +155°C

\* The ratings will be for the surface mounted condition

## environmental applications

### Derating Curve

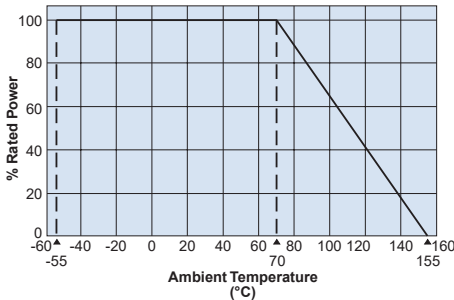

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

## Performance Characteristics

Parameter	XR73H, XR73B Requirement $\Delta R \pm (\%+0.05\%)$		XR73Z Requirement		Test Method
	Limit	Typical	Limit	Typical	
Resistance	Within specified tolerance	—	50mΩ max. after the test	15mΩ max. after the test	25°C
T.C.R.	Within specified T.C.R.	—	—	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	50mΩ max. after the test	1E: $R \leq 20m\Omega$ 1H: $R \leq 40m\Omega$	Rated Voltage x 2.5 for 5 seconds 1H: Rated voltage (DC) x 2 for 5 seconds
Rapid Change of Temperature	±1%	±0.5%	100mΩ max. after the test	1E: $R \leq 20m\Omega$ 1H: $R \leq 40m\Omega$	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±3%	±1.5%	100mΩ max. after the test	1E: $R \leq 20m\Omega$ 1H: $R \leq 40m\Omega$	40°C ± 2°C, 90%~95%RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±3%	±1%	100mΩ max. after the test	1E: $R \leq 20m\Omega$ 1H: $R \leq 40m\Omega$	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.5%	100mΩ max. after the test	1E: $R \leq 20m\Omega$ 1H: $R \leq 40m\Omega$	+155°C, 1000 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


1/11/17

## features

- Performs like RK73 under normal conditions
- Fuses when overloaded
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- Recognized by safety standard UL1412. (0603 (1J) is not recognized)



## dimensions and construction

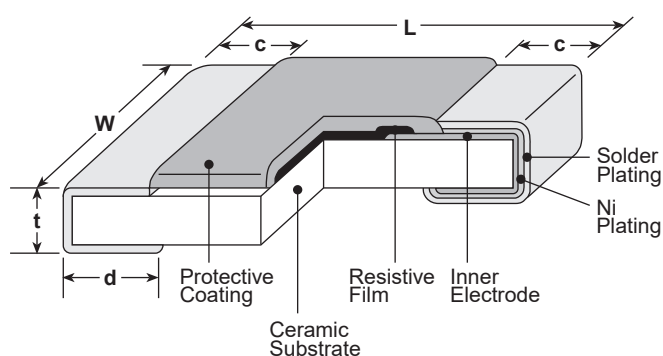

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.02±.004 (0.5±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-0.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-0.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)
<b>2E</b> (1210)		.102±.008 (2.6±0.2)			
<b>2H</b> (2010)	.197±.008 (5.0±0.2)	.098±.008 (2.5±0.2)			
<b>3A</b> (2512)	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)			

## ordering information

RF73	2B	T	TD	100	J
Type	Size Code	Termination Material	Packaging	Nominal Resistance	Tolerance
	1J: 0603 2A: 0805 2B: 1206 2E: 1210 2H: 2010 3A: 2512	T: Sn (Other termination styles may be available, please contact factory for options)	TD: 7" paper tape (0603, 0805, 1206, 1210: 5,000 pieces/reel) TE: 7" embossed plastic (0805, 1206, 1210, 2010, 2512: 4,000 pieces/reel)	2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω	J: ±5%

For further information on packaging, please refer to Appendix A.


## applications and ratings

Part Designation	Power Rating @ 70°C	T.C.R. (ppm/°C) Max.	Resistance Range E-24	Resistance Tolerance	Maximum Open Circuit Voltage	Fusing Characteristics					Fusing Time	Operating Temperature Range
						Fusing Power						
RF731J	0.063W	+1000 ~ -500 (1.0Ω-3.3Ω) ±500 (3.6Ω-100Ω)	1Ω-100Ω	J: ±5%	50V	—	2.6W 1.0Ω	2.4W 1.1Ω-20Ω	2.1W 22Ω-100Ω	—	60 sec. max.	-55°C to +125°C
RF732A	0.1W	+1000 ~ -500 (0.2Ω-4.3Ω) ±500 (4.7Ω-510Ω)	0.2Ω-510Ω			3.0W 0.2Ω-0.47Ω	2.6W 0.51Ω-1.0Ω	2.4W 1.1Ω-20Ω	2.1W 22Ω-100Ω	2.0W 110Ω-510Ω		
RF732B	0.125W					3.75W 0.2Ω-0.47Ω	2.875W 0.51Ω-1.0Ω	2.5W 11Ω-24Ω	2.0W 27Ω-100Ω	1.75W 110Ω-510Ω		
RF732E	0.25W					4.5W 0.2Ω-0.47Ω	4.1W 0.51Ω-4.7Ω	3.5W 5.1Ω-27Ω	3.2W 30Ω-100Ω	3.0W 110Ω-510Ω		
RF732H	0.50W					5.5W 0.2Ω-0.47Ω	5.0W 0.51Ω-4.7Ω	4.0W 5.1Ω-27Ω	3.5W 30Ω-100Ω	3.2W 110Ω-510Ω		
RF733A	1.0W					6.5W 0.2Ω-0.47Ω	6.0W 0.51Ω-4.7Ω	5.0W 5.1Ω-30Ω	4.5W 33Ω-100Ω	4.0W 110Ω-510Ω		

Rated ambient temperature: +70°C


## environmental applications

### Derating Curve

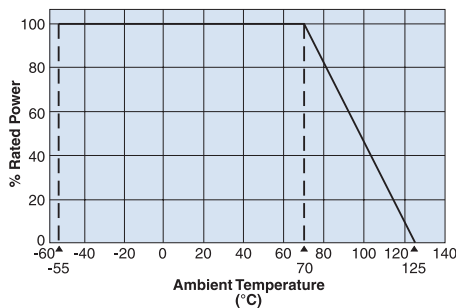


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

### One-Pulse Limiting Electric Power

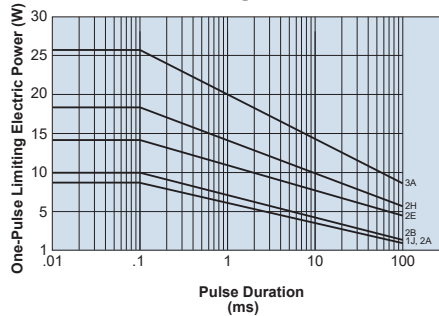

### Example of Fusing Characteristics

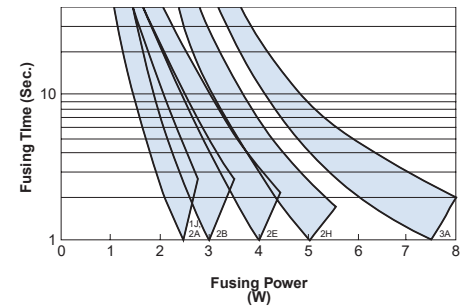

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\% + 0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short Time)	±5.0%	±2.0%	Rated voltage x 2 for 5 seconds (except 2E, 2H, 3A: x 1.5)
Resistance to Solder Heat	±3.0%	0.5%	260°C ± 5°C for 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%: 2A~3A ±3.0%: 1J	±0.3%: 2A~3A ±0.6%: 1J	-55°C (30 minutes)/ +125°C (30 minutes) 5 cycles
Moisture Resistance	±5.0%	±2.0%	40°C ± 2°C, 90 - 95% RH, 500 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±5.0%	±1.0%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1.0%	±0.6%	+125°C, 100 hours


## concave termination with square corners resistor array



### features

- Manufactured to type RK73 standards
- Less board space than individual chips
- Isolated resistor elements
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: CN1J4 only

### dimensions and construction

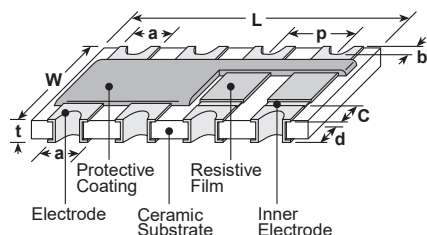

Size Code	Dimensions inches (mm)								
	L	W	C	d	t	a (top)	a (bot.)	b	p (ref.)
1E2 (0402x2)	.039±.004 (1.0±0.1)	.039±.004 (1.0±0.1)	.008±.004 (0.2±0.1)	.010±.004 (0.25±0.1)	.014±.004 (0.35±0.1)	.012±.004 (0.3±0.1)	.012±.006 (0.3±0.1)	.003±.002 (0.07±0.05)	.020 (0.5)
1E4 (0402x4)	.079±.004 (2.0±0.1)								
1J2 (0603x2)	.063±.008 (1.6±0.2)	.063±.008 (1.6±0.2)	.012±.008 (0.3±0.2)	.016±.004 (0.4±0.1)					.031 (0.8)
1J4 (0603x4)	.126±.008 (3.2±0.2)								
1J8 (0603x8)	.252±.008 (6.4±0.2)								
2A2 (0805x2)	0.1±.008 (2.54±0.2)	.079±.008 (2.0±0.2)	.016±.008 (0.4±0.2)		.024±.004 (0.6±0.1)			.006±.004 (0.15±0.1)	
2A4 (0805x4)	0.2±.008 (5.08±0.2)								
2A8 (0805x8)	0.4±.008 (10.16±0.2)								
2B2 (1206x2)	0.1±.008 (2.54±0.2)	.126±.008 (3.2±0.2)	.020±.012 (0.5±0.3)	.022±.004 (0.55±0.1)		.031±.004 (0.8±0.1)	.030±.006 (0.75±0.15)		.050 (1.27)
2B4 (1206x4)	0.2±.008 (5.08±0.2)								
2B8 (1206x8)	0.4±.008 (10.16±0.2)								

### ordering information


CN	1J	4	T	TD	101	J
Type	Size	Elements	Termination Material	Packaging	Nominal Resistance	Tolerance
	1E 1J 2A 2B	2 4 8	T: Sn (1J ~ 2B: Other termination styles may be available, please contact factory for options)	TE: 7" embossed plastic TD: 7" paper tape TED: 10" embossed plastic TDD: 10" paper tape	2 significant figures + 1 multiplier for ±2 & ±5% 3 significant figures + 1 multiplier for ±1%	F: ±1% G: ±2% J: ±5%

For further information on packaging, please refer to Appendix A.

## concave termination with square corners resistor array


### circuit schematic

CN1E2, CN1J2,  
CN2A2, CN2B2




R1 = R2

CN1E4, CN1J4,  
CN2A4, CN2B4




R1 = R2 = R3 = R4

CN1J8, CN2A8, CN2B8



R1 = R2 = R3 = R4 = R5 = R6 = R7 = R8

### Circuit Board Application

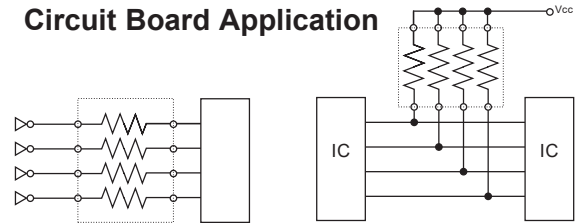

### applications and ratings

Part Designation	Power Rating @ 70°C (Per Element)	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.		Resistance Range (Ω)			Absolute Maximum Working Voltage	Maximum Overload Voltage (5 Secs. Max.)
				F:±1%	J:±5%, G:±2%	E-24, E-96 (F:±1%)	E-24 (G:±2%)	E-24 (J:±5%)		
CN1E2	1/16W (.063W)	+70°C	—	—	—	—	—	10 - 100k	25V	50V
CN1E4										
CN1J2	1/16W (.063W)	+70°C	—	±100: R≥10Ω	±200: R≥10Ω	10 - 1M	—	10 - 1M	50V	100V
CN1J4										
CN1J8	1/10W (.100W)	+70°C	+125°C	±200: R≥10Ω	±400: R<10Ω	10 - 1M	10 - 1M	10 - 1M	100V	200V
CN2A2										
CN2A4	1/8W (.125W)	+70°C	+125°C	±200: R≥10Ω	±400: R<10Ω	10 - 1M	10 - 1M	10 - 1M	200V	400V
CN2A8										
CN2B2	1/8W (.125W)	+70°C	+125°C	±200: R≥10Ω	±400: R<10Ω	10 - 1M	10 - 1M	10 - 1M	200V	400V
CN2B4										
CN2B8	1/8W (.125W)	+70°C	+125°C	±200: R≥10Ω	±400: R<10Ω	10 - 1M	10 - 1M	10 - 1M	200V	400V
CN2B8										


\* Note that network resistors generate higher heat rather than single flat chip resistor under rated power output.

Operating Temperature Range: -55°C to +125°C (CN1E), -55°C to +155°C


If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

### environmental applications

#### Derating Curve

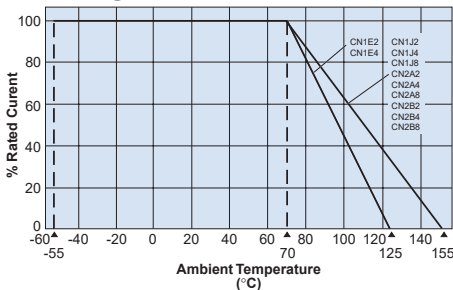

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

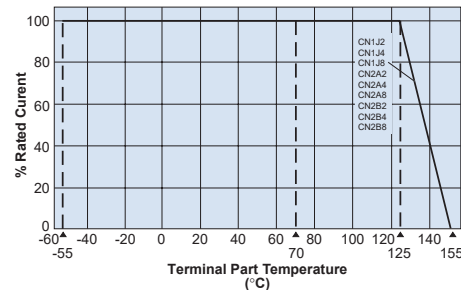

For resistors operated at a terminal temperature of described for each size or above, a power rating shall be derated in accordance with the above derating curve.

#### Performance Characteristics

Parameter	Requirement Δ R ±%		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C, +25°C/+125°C
Overload (Short time)	±2.0%	±0.5%	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1.0%	±0.25%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1.0%	±0.5%	-55°C (30 minutes), +125°C (30 minutes), 5 cycles
Moisture Resistance	±5.0%	±1.0%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±5.0%	±0.5%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1.0%	±0.2%: CN1E2, CN1E4	CN1E2, CN1E4: +125°C, 1000 hours
		±0.3%: Other	CN1J2, CN1J4, CN1J8, CN2A2, CN2A4, CN2A8, CN2B2, CN2B4, CN2B8: +155°C, 1000 hours

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/14/17



## convex termination with square corners resistor array




### features


- Manufactured to type RK73 standards
- Less board space than individual chips
- Isolated resistor elements
- Convex terminations with square corners (CN\_K)
- Flat termination with square corners (CN\_N)
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: CN1E4K and CN1J4K only

### dimensions and construction

CN1E2K, CN1J2K



CN1E4K, CN1J4K, CN1F8K, CN1FN8K

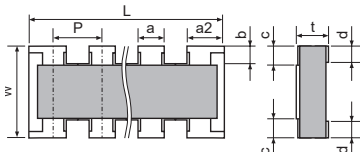

Size Code	Dimensions inches (mm)								
	L	W	c	d	t	a	a 2	b	P
1E2K (0402x2)	.039±.004 (1.0±0.1)	.039±.004 (1.0±0.1)	.006±.004 (0.15±0.1)	.010±.004 (0.25±0.1)	.014±.004 (0.35±0.1)	.013±.004 (0.33±0.1)	—	.007±.002 (0.17±0.05)	.026 (0.67)
1E4K (0402x4)	.079±.004 (2.0±0.1)		.006±.008 (0.15±0.2)	.010±.008 (0.25±0.2)		.012±.006 (0.3±0.15)	.016±.006 (0.4±0.15)	.006±.004 (0.15±0.1)	.020 (0.5)
1J2K (0603x2)	.063±.006 (1.6±0.15)	.063±.006 (1.6±0.15)	.012±.008 (0.3±0.2)	.010±.004 (0.25±0.1)	.020±.004 (0.5±0.1)	.024±.006 (0.6±0.15)	—	.012±.004 (0.3±0.1)	0.031 (0.8)
1J4K (0603x4)	.126±.006 (3.2±0.15)		.012±.006 (0.5±0.15)	.026±.006 (0.65±0.15)		.006±.004 (0.15±0.1)	.020 (0.5)		
1F8K 1FN8K (0602x8)	.149±.004 (3.8±0.1)	.063±.004 (1.6±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)	.012±.004 (0.30±0.1)	—	.006 (0.15)	.020 (0.5)

### ordering information

CN	1J	4	K	T	TD	101	J
Type	Size	Elements	Terminal Convex	Termination Material	Packaging	Nominal Resistance	Tolerance
	1E 1J	2 4	K: Convex type with square corners N: Flat type with square corners	T: Sn (1E, 1J: Other termination styles may be available, please contact factory for options)	TD: 7" paper tape TDD: 10" paper tape	2 significant figures + 1 multiplier for ±5% 3 significant figures + 1 multiplier for ±1%	F: ±1% J: ±5%

CN	1F	N	8	K	T	TD	101	J
Type	Size	Marking	Elements	Terminal Convex	Termination Material	Packaging	Nominal Resistance	Tolerance
		Blank: Marking N: No Marking		K: Convex type with square corners	T: Sn (Other termination styles may be available, please contact factory for options)	TD: 7" paper tape	2 significant figures + 1 multiplier for ±5% 3 significant figures + 1 multiplier for ±1%	F: ±1% J: ±5%

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/29/18

## applications and ratings



Part Designation	Power Rating @ 70°C (Per Element)	Rated Ambient Temp.	Rated Terminal Temp.	Resistance Range		T.C.R. (ppm/°C) Max.		Absolute Maximum Working Voltage	Maximum Overload Voltage (5 Secs. Max.)	Operating Temp Range
				E-24, E-96 (F±1%)	E-24 (J±5%)	(F±1%)	(J±5%)			
CN1E2K	1/16W (.063W)	+70°C	+125°C	10Ω - 100kΩ	10Ω - 1MΩ	±200:R≥10Ω	±200:R>10Ω ±400:R<10Ω	25V	50V	-55°C to +155°C
CN1E4K					1Ω - 1MΩ	±100:R≥10Ω		50V	100V	
CN1J2K						±200:R>10Ω ±400:R<10Ω		25V	50V	
CN1J4K	1/16W (.063W) 0.25W per package	—	—	10Ω - 100kΩ	10Ω - 1MΩ	±200:R≥10Ω	25V	50V	-55°C to +125°C	
CN1F8K					—	—	—	—		
CN1FN8K	—	—	—	—	—	—	—	—	—	

Note that network resistors generate higher heat rather than single flat chip resistor under rated power output

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

## environmental applications

### Derating Curve

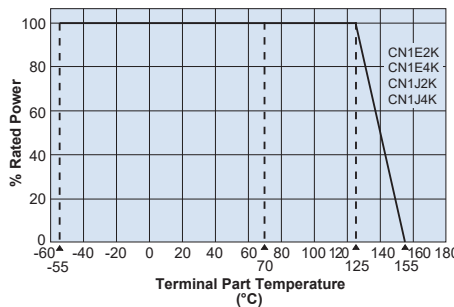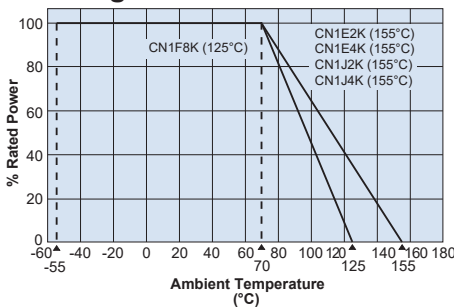


For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

## circuit schematic


CN1E2K, CN1J2K





CN1E4K, CN1J4K



CN1F8K, CN1FN8K

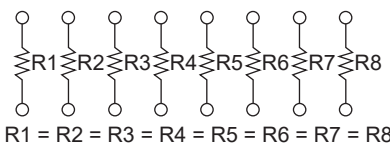

## Circuit Board Application



## Performance Characteristics

Parameter	Requirement Δ R ±(%+0.1Ω)		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C, +25°C/+125°C
Overload (Short time)	±2.0%	±0.25%	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1.0%	±0.75%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1.0%	±0.5%	-55°C (30 minutes), +125°C (30 minutes), 5 cycles
Moisture Resistance	±5.0%	±1.0%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±5.0%	±0.5%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1.0%	±0.15%: CN1F8K +0.25: All others	+125°C, 1000 hours: CN1F8K +155°C, 1000 hours: CN1E2K, CN1E4K, CN1J2K, CN1J4K


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/17

### features

- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- More advancement in the mounting density than individual chip resistors
- Mounting cost reduction by decreasing the number of parts mounting times
- Higher self-alignment effect in reflow-soldering process
- Suitable for an image recognition mounter due to square corner design
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

### dimensions and construction

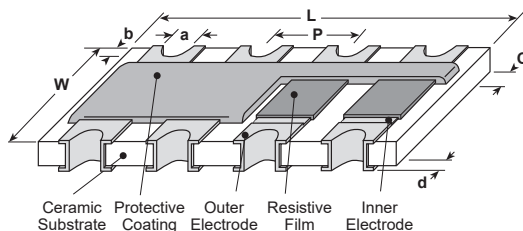


Type	Dimensions inches (mm)										Weight (g)
	L±0.2	W±0.2	c	d±0.1	t±0.1	a (top)	a (bottom)	b±0.1	P		
CN1J4RT (0603x4)	0.126 (3.2)	0.06 (1.6)	.01±.008 (0.3±0.2)	0.016 (0.4)		.02±.004 (0.5±0.1)	.016±.006 (0.4±0.15)		0.031 (0.8)	10.2	
CN2A4RT (0805x4)	0.2 (5.08)	0.08 (2.0)	.016±.008 (0.4±0.2)	0.022 (0.55)	0.024 (0.6)	.03±.004 (0.8±0.1)	.03±.006 (0.75±0.15)	0.006 (0.15)	0.05 (1.27)	20.6	
CN2B4RT (1206x4)		0.126 (3.2)	.02±.01 (0.5±0.3)							33.5	

### ordering information

CN	1J	4	RT	TD	103	J
Type	Size	Number of Resistors	Termination Material	Packaging	Nominal Resistance	Tolerance
CN CNZ	1J 2A 2B	4	RT : Sn	TD: 7" paper TE: 7"plastic embossed	2 significant figures + 1 multiplier	J : ±5%

For further information on packaging, please refer to Appendix A.

### circuit schematic

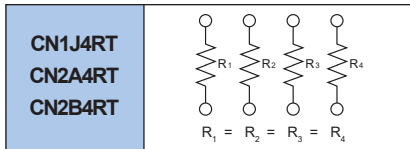

### jumper ratings

Type	Resistance	Current Rating	Max. Surge Current
CNZ1J4RT	50mΩ max.	0.5A	2A
CNZ2A4RT		1.0A	3A
CNZ2B4RT			4A


### applications and ratings

Part Designation	Power Rating (per Element)	T.C.R. ( $\times 10^{-6}/K$ )	Resistance Range ( $\Omega$ ) J: $\pm 5\%$ E24	Absolute Maximum Working Voltage	Maximum Overload Voltage	Rated Working Temperature	Operating Temperature Range	Taping & Quantity Reel (pcs)	
								TD	TE
CN1J4RT	0.063	$\pm 200$	10~1M	50V	100V	$+70^\circ C$	$-55^\circ C$ to $+125^\circ C$	5,000	—
CN2A4RT	0.1			100V	200V			—	4,000
CN2B4RT	0.125			200V	400V			—	4,000

\* Note that network resistors generate higher heat rather than single flat chip resistors even under rated power output


### environmental applications

#### Derating Curve

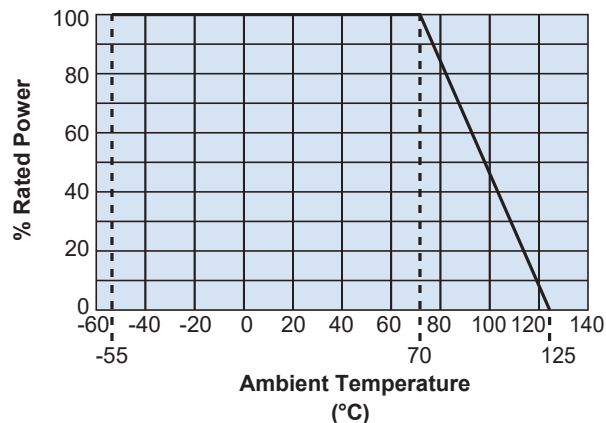

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

#### Circuit Board Application

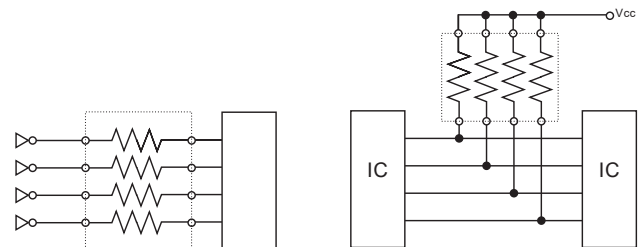


### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	$+25^\circ C/-55^\circ C$ and $+25^\circ C/+125^\circ C$
Overload (Short time)	$\pm 2.0\%$	$\pm 0.50\%$	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	$\pm 1.0\%$	$\pm 0.25\%$	$260^\circ C \pm 5^\circ C$ , 10 seconds $\pm 1$ second
Rapid Change of Temperature	$\pm 1.0\%$	$\pm 0.50\%$	$-55^\circ C$ (30 minutes) / $+125^\circ C$ (30 minutes), 5 cycles
Moisture Resistance	$\pm 5.0\%$	$\pm 1.0\%$	$40^\circ C \pm 2^\circ C$ , 90-95% RH, 1000 hours, 1.5 hr ON / 0.5 hr OFF cycle
Endurance at 70°C	$\pm 5.0\%$	$\pm 0.50\%$	$70^\circ C \pm 2^\circ C$ , 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	$\pm 1.0\%$	$\pm 0.20\%$	$+125^\circ C$ , 1000 hours
Sulfuration Test	$\pm 5.0\%$	—	Soaked in industrial oil with 3.5% sulfur concentration $105^\circ C \pm 3^\circ C$ , 500 hours

### features

- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- More advancement in the mounting density than individual chip resistors
- Mounting cost reduction by decreasing the number of parts to mount
- Easy soldering fillet inspection
- Suitable for an image recognition mounter due to square corner design
- Products with lead-free termination meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

### dimensions and construction

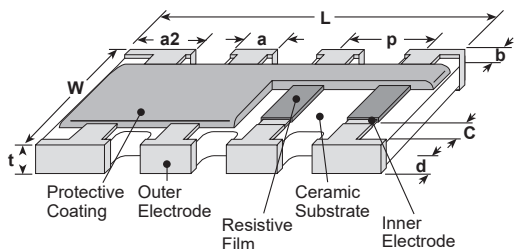

Type	Dimensions inches (mm)								
	L	W	c	d	t	a	a2	b	P*
CN1E2KRT (0402x2)	.039±.004 (1.0±0.1)	.039±.004 (1.0±0.1)	.006±.004 (0.15±0.1)	.010±.004 (0.25±0.1)	.014±.004 (0.35±0.1)	.013±.004 (0.33±0.1)	—	.007±.002 (0.17±0.05)	.026 (0.67)
CN1E4KRT (0402x4)	.079±.004 (2.0±0.1)	.039±.004 (1.0±0.1)	.006±.004 (0.15±0.1)	.010±.008 (0.25±0.2)	.014±.004 (0.35±0.1)	.012±.006 (0.3±0.15)	.016±.006 (0.4±0.15)	.006±.004 (0.15±0.1)	.020 (0.5)
CN1J4KRT (0603x4)	.126±.006 (3.2±0.15)	.063±.006 (1.6±0.15)	.012±.008 (0.3±0.2)	.010±.004 (0.25±0.1)	.020±.004 (0.5±0.1)	.020±.006 (0.5±0.15)	.026±.006 (0.65±0.15)	.012±.004 (0.3±0.1)	.031 (0.8)
CN1F8KRT (0602x8)	.150±.004 (3.8±0.1)	.063±.004 (1.6±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)	.012±.004 (0.3±0.1)	—	.006* (0.15)	.020 (0.5)

\* Referential values.

### ordering information

CN	1E	4	K	RT	TD	103	J
Type	Size	Number of Resistors	Terminal Convex	Termination Material	Packaging	Nominal Resistance	Tolerance
CN CNZ	1E 1F NEW 1J	2 4 8	K: Convex type with squared corners	RT: Sn	TD: 7" paper	±1%: 3 significant figures + 1 multiplier "R" indicates decimal on values <100Ω ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on values <10Ω	F: ±1% J: ±5%

For further information on packaging, please refer to Appendix A.

### applications and ratings

Part Designation	Power Rating per Element	Resistance Range		T.C.R. (×10 <sup>-6</sup> /K)		Max. Working Voltage	Max. Overload Voltage	Rated Ambient Temperature	Operating Temperature Range
		F: ±1% E24,E96	J: ±5% E24	F: ±1% E24,E96	J: ±5% E24				
CN1E2KRT	0.063	—	3~1M	—	±200: R≥10Ω ±400: R<10Ω	25V	50V	+70°C	-55°C~+125°C
CN1E4KRT		10~1M		±200: R≥10Ω					
CN1J4KRT				±100: R≥10Ω					
CN1F8KRT	0.063*	—	10~1M	—	—	25V	50V		-55°C~+125°C

Please note that network resistors generate higher heat rather than single flat chip resistor even under rated power output.

\* 0.25W per package

Rated voltage =  $\sqrt{\text{Power Rating} \times \text{Resistance value}}$  or Max. working voltage, whichever is lower.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/28/16




## environmental applications

### Jumper Ratings


Type	Resistance	Current Rating	Maximum Surge Current
CN1E4KRT	100mΩ Max.	0.5A	2A
CN1J4KRT			

### Circuit Board Application

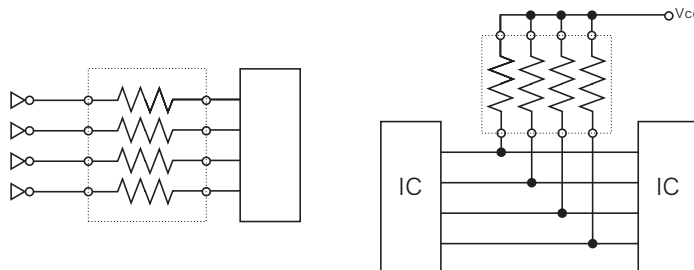


### Circuit Construction

#### CN1E2KRT




$$R_1 = R_2$$

#### CN1E4KRT/CN1J4KRT




$$R_1 = R_2 = R_3 = R_4$$

#### CN1F8KRT

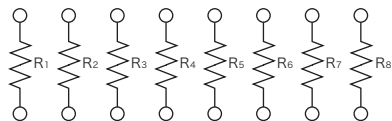

$$R_1 = R_2 = R_3 = R_4 = R_5 = R_6 = R_7 = R_8$$

### Derating Curve

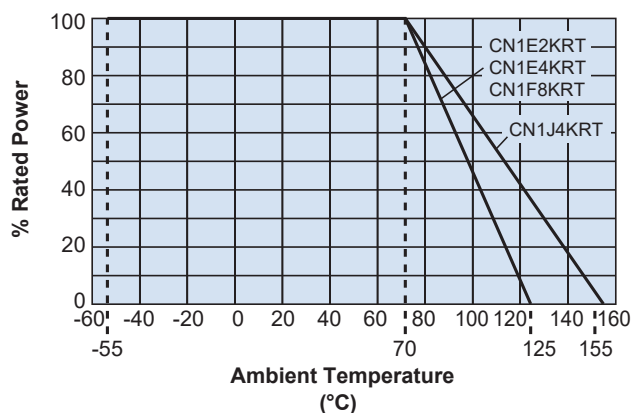

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

## Performance Characteristics

Parameters	Performance Requirements $\Delta R \pm (\% + 0.1\Omega)$		Test Methods
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	2%	0.25%	Rated voltage × 2.5 for 5 seconds
Resistance to Soldering Heat	1%	0.75%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	1%	0.5%	-55°C (30 minutes) / +125°C (30 minutes) 5 cycles
Moisture Resistance	5%	1%	40°C ± 2°C, 90%~95%RH, 1000 hours 1.5 hr ON / 0.5 hr OFF cycle
Endurance at 70°C	5%	0.5%	70°C ± 2°C, 1000 hours 1.5 hr ON / 0.5 hr OFF cycle
High Temperature Exposure	1%	0.15%	+125°C, 1000 hours: CN1E2KRT, CN1E4KRT, CN1F8KRT
		0.25%	+155°C, 1000 hours: CN1J4KRT
Sulfuration Test	5%	—	Soaked in industrial oil with 3.5% sulfur concentration 105°C ± 3°C, 500 hours

## bussed square corner resistor array




### features

- Manufactured to type RK73 standards
- Concave or convex terminations
- Less board space than individual chips
- Eight bussed resistor elements included in one array
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

### dimensions and construction

Size Code	Figure No.	Dimensions inches (mm)										
		L	W	C	d	e	t	a (top)	a2	a (bot.)	b	p
1J10VK	2	.126±.004 (3.2±0.1)	.063±.004 (1.6±0.1)	.012±.008 (0.3±0.2)	.012±.004 (0.3±0.1)	—	.020±.004 (0.5±0.1)	.016±.004 (0.4±0.1)	—	.012 (0.3)	—	.025 (0.64)
1J10K	2	.126±.004 (3.2±0.1)	.063±.004 (1.6±0.1)	.012±.008 (0.3±0.2)	.012±.004 (0.3±0.1)	—	.020±.004 (0.5±0.1)	.016±.004 (0.4±0.1)	.022±.004 (0.55±0.1)	.012±.008 (0.3±0.2)	—	.025 (0.64)
1J10Y	1	.126±.006 (3.2±0.15)	.063±.006 (1.6±0.15)	.008±.004 (0.2±0.1)	.014±.004 (0.35±0.1)	.016±.006 (0.4±0.15)	.022±.004 (0.55±0.1)	.013±.006 (0.33±0.15)	—	.012±.004 (0.3±0.1)	.004 (0.1)	.031 (0.8)
2A10Y		.157±.008 (4.0±0.2)	.083±.008 (2.1±0.2)	.010±.008 (0.25±0.2)	.016±.008 (0.4±0.2)	.020±.008 (0.5±0.2)	.024±.004 (0.6±0.1)	.020±.008 (0.5±0.2)	—	.016±.006 (0.4±0.15)	.006±.004 (0.15±0.1)	.031 (0.8)
2B10V	3	.252±.008 (6.4±0.2)	.122±.008 (3.1±0.2)	.014±.006 (0.35±0.15)	.022±.006 (0.55±0.15)	—	.024±.004 (0.6±0.1)	.024±.004 (0.6±0.1)	—	.024±.006 (0.6±0.15)	.006±.004 (0.15±0.1)	0.05 (1.27)
2B10												

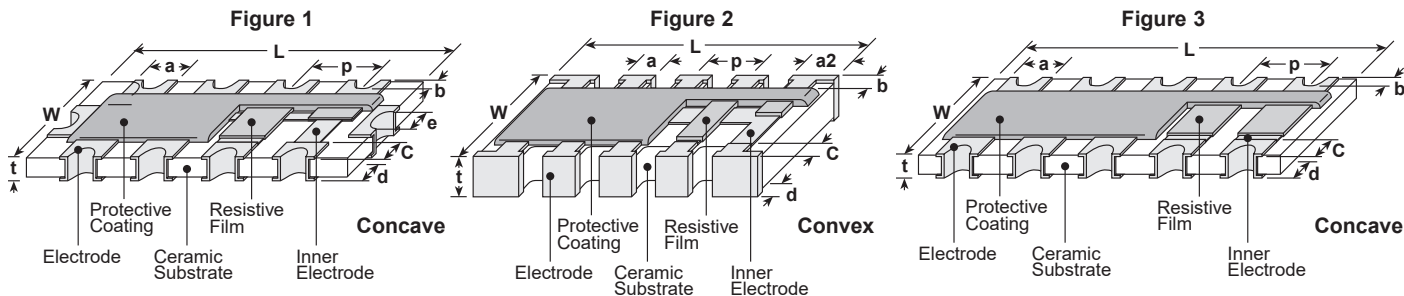

### ordering information

Convex:	CND	1J	10	V	K	T	TD	103	J
Type		Size	Elements	Circuit Symbol	Terminal Symbol	Termination Material	Packaging	Nominal Resistance	Tolerance
		1J	10	V: Reverse common electrode Blank: Standard	K: Convex type	T: Sn (Other termination styles may be available, please contact factory for options)	TD: 7" paper tape	2 significant figures + 1 multiplier	J: ±5%


Concave:	CND	2B	10	V	T	TE	103	J
Type		Size	Elements	Circuit Symbol	Termination Material	Packaging	Nominal Resistance	Tolerance
		1J 2A 2B	10	V: Reverse common electrode Y: Side common electrode Blank: Standard	T: Sn (Other termination styles may be available, please contact factory for options)	TD: 7" paper tape TE: 7" embossed plastic	2 significant figures + 1 multiplier	J: ±5%

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/17

## circuit schematics and markings

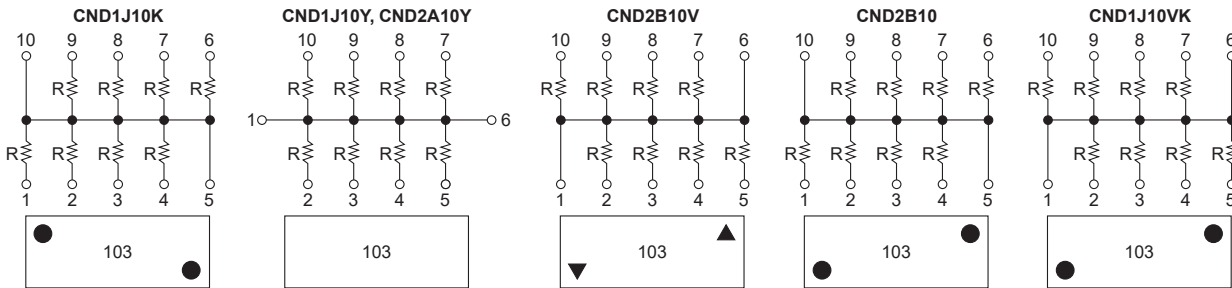


## applications and ratings

Part Designation	Power Rating @ 70°C (Per Element)	T.C.R. (ppm/°C) Max.	Resistance Range E-12	Resistance Tolerance	Absolute Maximum Working Voltage	Maximum Overload Voltage (5 Secs. Max.)	Rated Ambient Temperature	Operating Temperature Range
CND1J10VK	.031	±200	47Ω - 39kΩ	J: ±5%	25V	50V	+70°C	-55°C to +125°C
CND1J10K			22Ω - 39kΩ					
CND1J10Y	.05		100Ω - 100kΩ					
CND2A10Y	.063							
CND2B10V								
CND2B10								


\* Note that network resistors generate higher heat rather than single flat chip resistors even under rated power output

## environmental applications

### Derating Curve

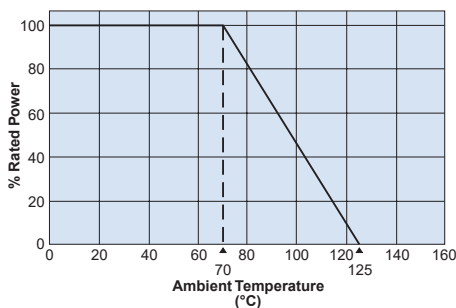

### Circuit Board Application

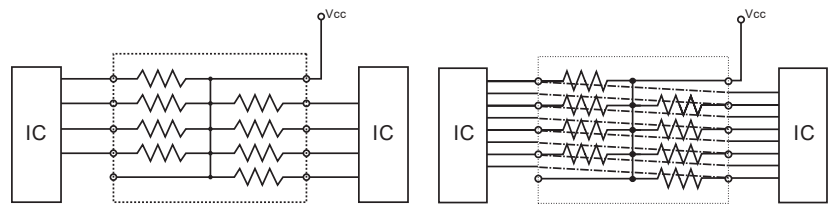

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C, +25°C/+125°C
Overload (Short time)	±2.0%	±0.5%	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1.0%	Convex: ±0.2% Concave: ±0.25%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1.0%	Convex: ±0.1% Concave: ±0.25%	-55°C (30 minutes), +125°C (30 minutes), 5 cycles
Moisture Resistance	±5.0%	±1.0%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±5.0%	Convex: ±0.5% Concave: ±1%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1.0%	±0.2%	+125°C, 1000 hours

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/14/17


## bussed concave termination square corner resistor array



### features

- Manufactured to type RK73 standards
- Less board space than individual chips
- Four or eight bussed resistor elements included in one array, concave terminations
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

### dimensions and construction

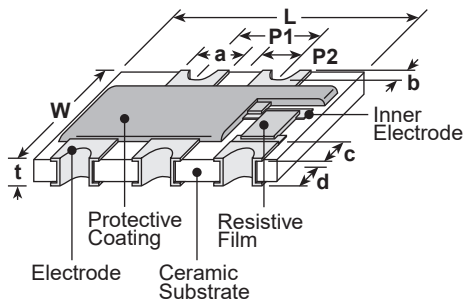

Size Code	Dimensions inches (mm)									
	L	W	t	P1	P2	a (top)	a (bot.)	b (ref.)	c (ref.)	d
2B9Z	.252±.008 (6.4±0.2)	.126±.008 (3.2±0.2)	.024±.004 (0.6±0.1)	.051±.004 (1.3±0.1)	.026±.004 (0.65±0.1)	.024±.004 (0.6±0.1)	.024±.004 (0.6±0.1)	.006 (0.15)	.018±.008 (0.45±0.2)	.024±.006 (0.6±0.15)
2E5Z	.126±.008 (3.2±0.2)	.098±.008 (2.5±0.2)	.024±.004 (0.6±0.1)	.039±.004 (1.0±0.1)	.020±.004 (0.50±0.1)	.022±.004 (0.55±0.1)	.022±.004 (0.55±0.1)	.006 (0.15)	.012±.006 (0.3±0.15)	.020±.006 (0.5±0.15)


### ordering information

CNB	2B	9	Z	T	TE	103	J
Type	Size	Elements	Circuit Symbol	Termination Material	Packaging	Nominal Resistance	Tolerance
	2B 2E	5 9	Z: A parallel circuit with staggered terminals and a common electrode on #1 terminal	T: Sn (Other termination styles may be available, please contact factory for options)	TE: 7" embossed plastic	2 significant figures + 1 multiplier	J: ±5%

For further information on packaging, please refer to Appendix A.

## bussed concave termination square corner resistor array

### circuit schematics

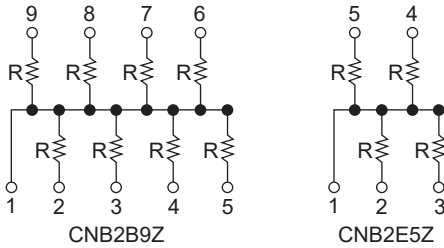


### applications and ratings

Part Designation	Power Rating @ 70°C (Per Element)	Rated Ambient Temperature	T.C.R. (ppm/°C) Max.	Resistance Range E-3*	Resistance Tolerance	Absolute Maximum Working Voltage	Maximum Overload Voltage (5 Secs. Max.)	Operating Temperature Range
CNB2B9Z	1/16W (.063W)	±70°C	±200	1kΩ - 470kΩ	J: ±5%	50V	100V	-55°C to +125°C
CNB2E5Z								

\* E-3 significant figures (per decade) are 1.0, 2.2 and 4.7.


### environmental applications

#### Derating Curve

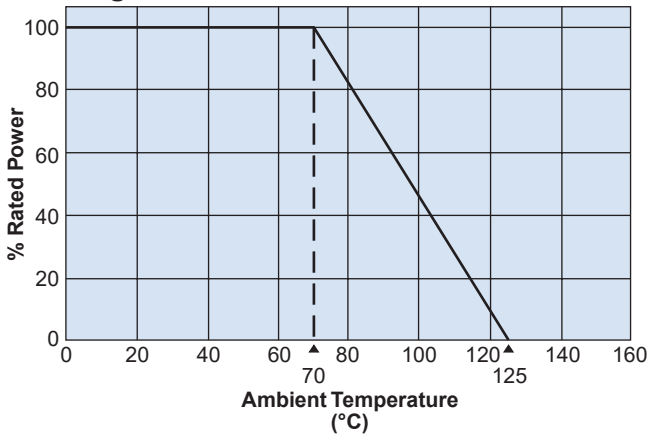

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

#### Circuit Board Application

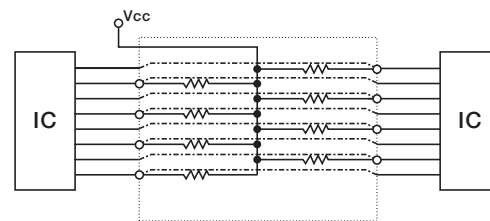

### Performance Characteristics


Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C, +25°C/+125°C
Overload (Short time)	±2.0%	±0.5%	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1.0%	±0.25%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1.0%	±0.1%	-55°C (30 minutes), +125°C (30 minutes), 5 cycles
Moisture Resistance	±5.0%	±1.0%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±5.0%	±0.5%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1.0%	±0.2%	+125°C, 1000 hours



## features


- Metal film chip network resistors
- Excellent in relative T.C.R. and relative accuracy
- Pair resistors for high precision OP-amplifiers
- As custom products, any pairs between 1k $\Omega$  and 100k $\Omega$  are available on request
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

## dimensions and construction

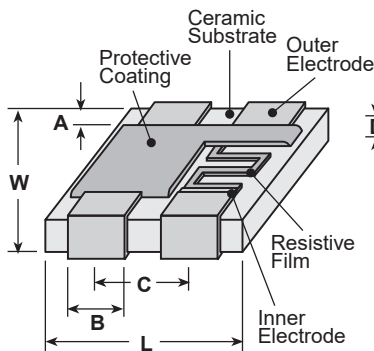

Size Code	Dimensions inches (mm)							
	A	B	C	D	E	F	L	W
CNN	.016 $\pm$ .012 (0.4 $\pm$ 0.3)	.028 $\pm$ .006 (0.7 $\pm$ 0.15)	.050 (1.27)	.016 $\pm$ .012 (0.4 $\pm$ 0.3)	.012 $\pm$ .008 (0.3 $\pm$ 0.2)	.020 $\pm$ .004 (0.5 $\pm$ 0.1)	.10 $\pm$ .008 (2.54 $\pm$ 0.2)	.079 $\pm$ .008 (2.0 $\pm$ 0.2)

## circuit schematic

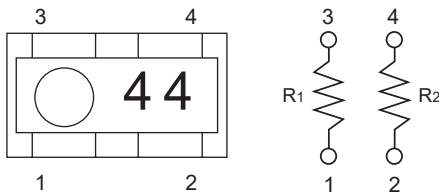

	Resistance					
R1	1k $\Omega$	1k $\Omega$	1k $\Omega$	10k $\Omega$	10k $\Omega$	100k $\Omega$
R2	1k $\Omega$	10k $\Omega$	100k $\Omega$	10k $\Omega$	100k $\Omega$	100k $\Omega$

CNN: Custom products of any pairs between 1k $\Omega$  and 100k $\Omega$  are available on request

	Marking					
R1*	3	3	3	4	4	5
R2**	3	4	5	4	5	5

\* First marking number

\*\* Second marking number

## ordering information

CNN	2A	2	T	TE	103/103	B	A
Type	Style	Number of Elements	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance	Resistance Ratio
CNN		2	T: Sn (Other termination styles may be available, please contact factory for options)	TE: 4 mm pitch embossed plastic	2 significant figures + multiplier	B: $\pm$ 0.1% C: $\pm$ 0.25%	A: 0.05% B: 0.1%

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


11/14/17

## applications and ratings


Part Designation	Power Rating w/Element	Resistance ( $\Omega$ )	Resistance Tolerance		T.C.R. (ppm/ $^{\circ}$ C)		Maximum Working Voltage	Maximum Overload Voltage	Rated Ambient Temperature	Operating Temperature Range
			Absolute	Relative	Absolute	Relative				
CNN	0.05	1K, 10k, 100k	B: $\pm 0.1\%$ C: $\pm 0.25\%$	A: $\pm 0.05\%$ B: $\pm 0.1\%$	$\pm 25$	5	50V	100V	+70 $^{\circ}$ C	-55 $^{\circ}$ C to +125 $^{\circ}$ C

## environmental applications

### Derating Curve

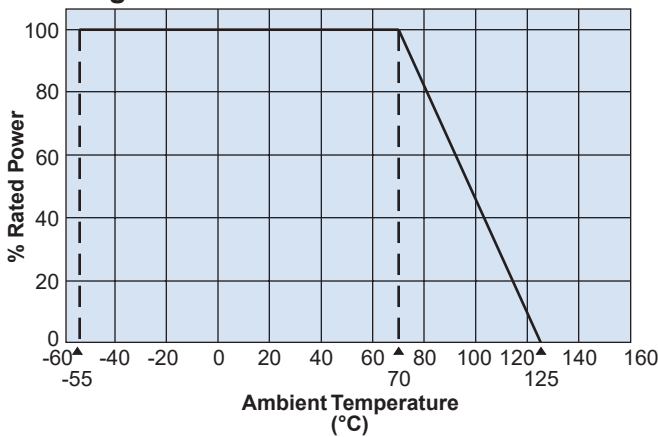

### Application Example



## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25 $^{\circ}$ C
T.C.R.	Within specified T.C.R.	—	+25 $^{\circ}$ C/-55 $^{\circ}$ C, +25 $^{\circ}$ C/+125 $^{\circ}$ C
Overload (Short time)	$\pm 0.1\%$	$\pm 0.01\%$	Rated voltage x 2.5 or Max. overload volume, whichever is less, for 5 seconds
Resistance to Soldering Heat	$\pm 0.1\%$	$\pm 0.02\%$	260 $^{\circ}$ C $\pm 5^{\circ}$ C, 10 seconds $\pm 1$ second
Rapid Change of Temperature	$\pm 0.25\%$	$\pm 0.01\%$	-55 $^{\circ}$ C (30 minutes), +125 $^{\circ}$ C (30 minutes), 5 cycles
Moisture Resistance	$\pm 0.25\%$	$\pm 0.03\%$	40 $^{\circ}$ C $\pm 2^{\circ}$ C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70 $^{\circ}$ C	$\pm 0.25\%$	$\pm 0.03\%$	70 $^{\circ}$ C $\pm 2^{\circ}$ C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	$\pm 0.25\%$	$\pm 0.02\%$	+125 $^{\circ}$ C, 100 hours


## thin film network resistors for high voltage divider



### features

- High precision high voltage divider
- Maximum resistance value 11.5MΩ, maximum working voltage 1000V, maximum resistance ratio 1:1000
- Relative precision of pair resistors are guaranteed
- Higher integration saves board space and overall assembly costs
- Excellent reliability with standard molded IC package
- Suitable for reflow soldering
- Products meet EU RoHS requirements
- AEC-Q200 qualified


### dimensions and construction

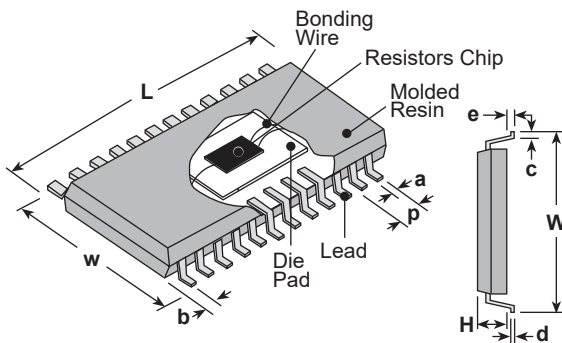

Type	Dimensions inches (mm)				
	L ±0.2	W ±0.2	w ±0.2	H ±0.2	p ±0.1
HVD	.341 (8.66)	.236 (5.99)	.150 (3.81)	.063 (1.60)	.025 (0.635)

Type	Dimensions inches (mm)				
	a ±0.1	b ±0.1	c ±0.2	d ±0.1	e ±0.1
HVD	.010 (0.25)	.033 (0.84)	.026 (0.66)	.008 (0.20)	.007 (0.18)

### circuit schematic

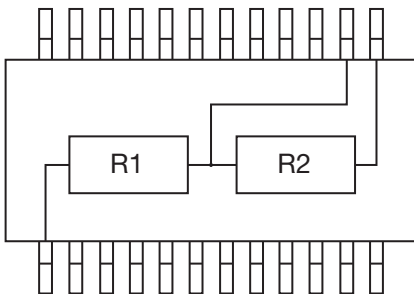

### ordering information

<b>HVD</b>	<b>Q24</b>	<b>T</b>	<b>TEB</b>	<b>9XXX</b>
<b>Circuit Code</b>	<b>Package Symbol</b>	<b>Termination Surface Material</b>	<b>Packaging</b>	<b>Custom Code</b>
HVD: High Voltage Divider	Package type symbol + Number of pins	T: Sn	TEB: Embossed plastic	

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/29/18

## applications and ratings


Part Designation	Power Rating	Power Rating /Resistor Element	Resistance Range (Max. Resistance Ratio 1:1000)	Absolute Resistance Tolerance	Relative Resistance Tolerance	T.C.R. (X10 <sup>-6</sup> /K)	Relative T.C.R. Tracking	Rated Ambient Temperature	Operating Temperature Range
R1	1000V	250mW	0.5MΩ ~ 11.5MΩ	±0.1%, ±0.25%, ±0.5%, ±1%	0.1%	±25	10	+85°C	-55°C to +155°C
R2	15V	50mW	1.5kΩ ~ 1MΩ	—	0.25%	±50	25		

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

Guaranteed value differs depending on resistance value

## environmental applications

### Derating Curve

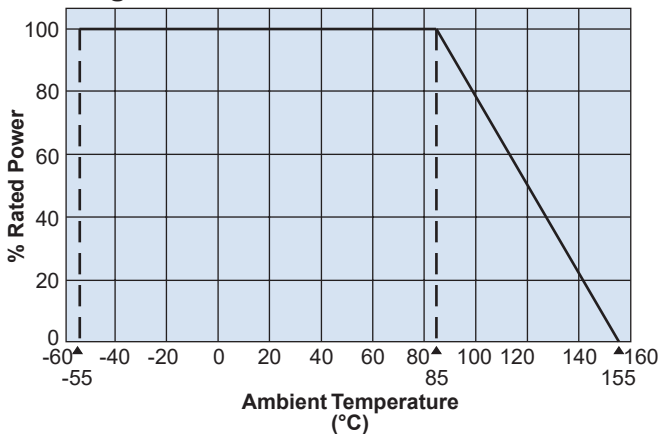

For resistors operated at an ambient temperature of 85°C or above, a power rating shall be derated in accordance with the derating curve.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C, +25°C/+155°C
Resistance to Soldering Heat	±0.1%	±0.02%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.1%	±0.01%	-55°C (30 minutes), +155°C (30 minutes), 1000 cycles
Moisture Resistance	±0.1%	±0.02%	85°C ± 2°C, 85% ± 5% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 85°C	±0.1%	±0.01%	85°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±0.1%	±0.03%	+155°C, 1000 hours


## convex termination with scalloped corners resistor array



### features

- Manufactured to type RK73 standards
- Less board space than individual chips
- Isolated resistor elements
- Convex terminations with scalloped corners
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: CN1J4A only

### dimensions and construction

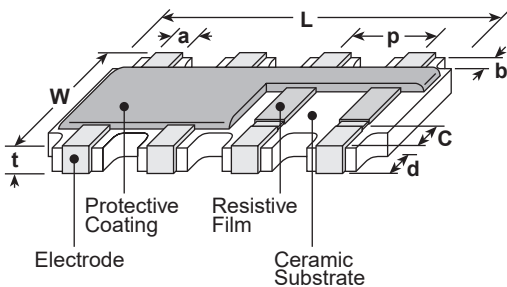


Size Code	Dimensions inches (mm)							
	L	W	C	d	t	a	b	p (ref.)
1J4A	.126±.006 (3.2±0.15)	.063±.006 (1.6±0.15)	.012±.008 (0.3±0.2)	.010±.004 (0.25±0.1)	.020±.004 (0.5±0.1)	.020±.006 (0.5±0.15)	.012±.004 (0.3±0.1)	.031 (0.8)
2B4A	0.2±.008 (5.1±0.2)	.122±.008 (3.1±0.2)	.020±.008 (0.5±0.2)	.014±.006 (0.35±0.15)	.022±.004 (0.55±0.1)	.031±.008 (0.8±0.2)	.018±.004 (0.45±0.1)	.050 (1.27)

### ordering information

<b>CN</b>	<b>1J</b>	<b>4</b>	<b>A</b>	<b>T</b>	<b>TD</b>	<b>101</b>	<b>J</b>
Type	Size	Elements	Terminal Convex	Termination Material	Packaging	Nominal Resistance	Tolerance
	1J 2B			T: Sn (Other termination styles maybe available, please contact factory for options)	TE: 7" embossed plastic TD: 7" paper tape TED: 10" embossed plastic TDD: 10" paper tape	2 significant figures + 1 multiplier for ±2% & ±5% 3 significant figures + 1 multiplier for ±1%	F: ±1% J: ±5%

### circuit schematic



For further information on packaging, please refer to Appendix A.



## applications and ratings



Part Designation	Power Rating @ 70°C (Per Element)	Rated Ambient Temp.	Rated Terminal Temp.	T.C.R. (ppm/°C) Max.		Resistance Range		Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temp. Range
				(F±1%)	(J±5%)	E-24, E-96 (F±1%)	E-24 (J±5%)			
CN1J4A	1/16W (.063W)	70°C	+125°C	±100;R≥10Ω	±200;R≥10Ω	10 - 100kΩ	1Ω - 1MΩ	50V	100V	-55°C to +155°C
CN2B4A	1/8W (.125W)			—	±400;R<10Ω	—	10Ω - 1MΩ	200V	400V	

\* Note that network resistors generate higher heat rather than single flat chip resistors even under rated power output

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

## environmental applications


### Derating Curve

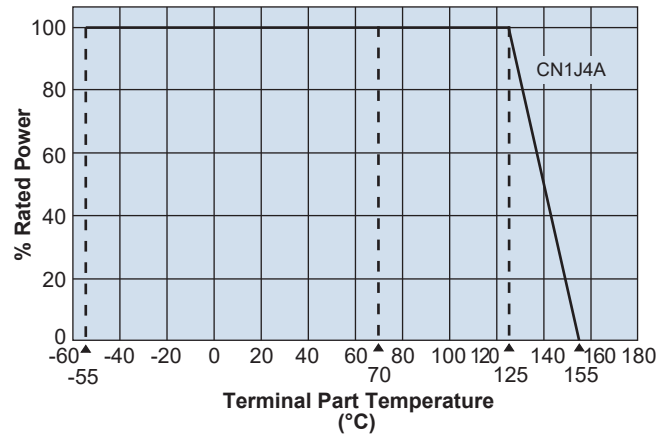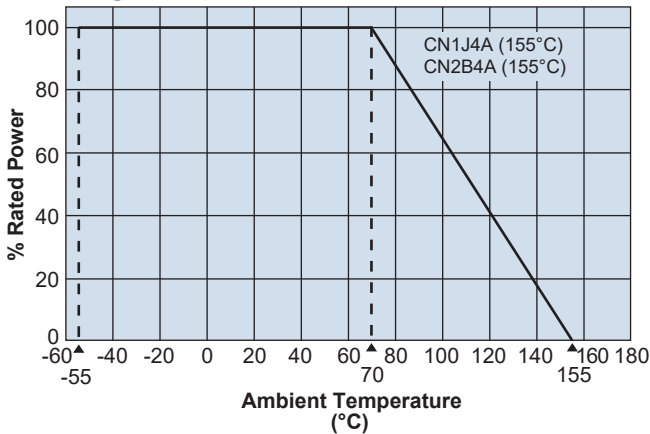

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### Circuit Board Application

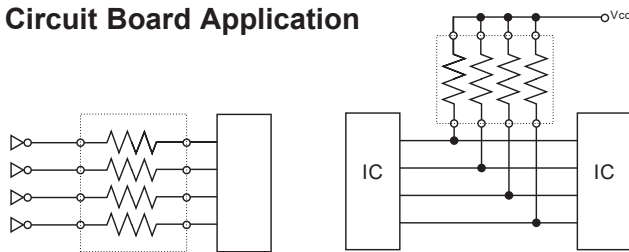

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C, +25°C/+125°C
Overload (Short time)	±2.0%	±0.25%	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1.0%	±0.75%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1.0%	±0.5%	-55°C (30 minutes), +125°C (30 minutes), 5 cycles
Moisture Resistance	±5.0%	±1.0%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±5.0%	±0.5%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1.0%	±0.25%	+155°C, 1000 hours


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/14/17


## features

- Manufactured to type RK73Z standards
- Concave or convex terminations
- Less board space than individual chip
- Isolated jumper elements
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.


## dimensions and construction

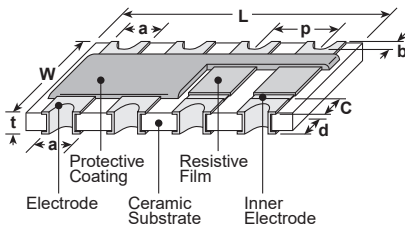

CN Concave/Square Corner

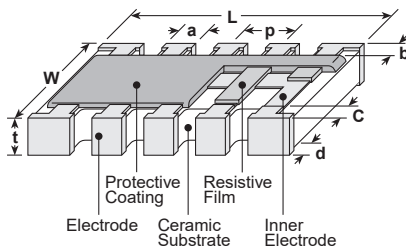

CN\_K/N Convex/Square Corner

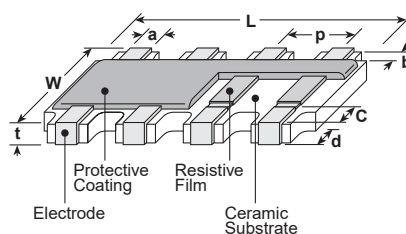

CN\_\_A Convex/Scalloped Corner

Size Code	Dimensions inches (mm)								
	L	W	C	d	t	a (top)	a (bot.)	b	p (ref.)
CNZ1E2 (0402 x 2)	.039±.004 (1.0±0.1)	.039±.004 (1.0±0.1)	.008±.004 (0.2±0.1)	.010±.004 (0.25±0.1)	.014±.004 (0.35±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.003±.002 (0.07±0.05)	.020 (0.5)
CNZ1E4 (0402 x 4)	.079±.004 (2.0±0.1)								
CNZ1J2 (0603 x 2)	.063±.008 (1.6±0.2)	.063±.008 (1.6±0.2)	.012±.008 (0.3±0.2)	.016±.004 (0.4±0.1)					.031 (0.8)
CNZ1J4 (0603 x 4)	.126±.008 (3.2±0.2)								
CNZ1J8 (0603 x 8)	.252±.008 (6.4±0.2)								
CNZ2A2 (0805 x 2)	.100±.008 (2.54±0.2)	.079±.008 (2.0±0.2)	.016±.008 (0.4±0.2)		.024±.004 (0.6±0.1)			.006±.004 (0.15±0.1)	.050 (1.27)
CNZ2A4 (0805 x 4)	.200±.008 (5.08±0.2)								
CNZ2B2 (1205 x 2)	.100±.008 (2.54±0.2)	.126±.008 (3.2±0.2)	.020±.012 (0.5±0.3)		.022±.004 (0.55±0.1)	.031±.004 (0.8±0.1)	.030±.006 (0.75±0.15)		
CNZ2B4 (1206 x 4)	.200±.008 (5.08±0.2)								


Size Code	Dimensions inches (mm)							
	L	W	C	d	t	a (ref.)	b (ref.)	p (ref.)
CNZ1E2K (0402 x 2)	.039±.004 (1.0±0.1)	.039±.004 (1.0±0.1)	.006±.004 (0.15±0.1)	.010 max. (0.25±0.1)	.014±.004 (0.35±0.1)	.013±.004 (0.33±0.1)	.007±.002 (0.17±0.05)	.026 (0.67)
CNZ1E4K (0402 x 4)	.079±.004 (2.0±0.1)	.039±.004 (1.0±0.1)	.006±.004 (0.15±0.1)	.010 max. (0.25±0.2)		.008±.006 (0.3±0.15)	.006±.004 (0.15±0.1)	.020 (0.5)
CNZ1J2K (0603 x 2)	.063±.006 (1.6±0.15)	.063±.006 (1.6±0.15)	.012±.008 (0.3±0.2)	.016±.004 (0.25±0.1)	.020±.004 (0.5±0.1)	.024±.006 (0.6±0.15)	.014±.004 (0.3±0.1)	.031 (0.8)
CNZ1J4A (0603 x 4)	.126±.006 (3.2±0.15)					.020±.006 (0.5±0.15)		
CNZ1J4K (0603 x 4)	.126±.006 (3.2±0.15)					.020±.006 (0.5±0.15)		
CNZ2B4A (0805 x 4)	.201±.008 (5.1±0.2)	.122±.008 (3.1±0.2)	.020±.008 (0.5±0.2)	.014±.006 (0.35±0.15)	.022±.004 (0.55±0.1)	.031±.008 (0.8±0.2)	.018±.006 (0.45±0.1)	.050 (1.27)
CNZ1F8K (0805 x 8)	.200±.008 (3.8±0.1)	.063±.004 (1.6±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.006 (0.45±0.1)	.014±.004 (0.3±0.1)	.006 (0.15)	.020 (0.5)

## ordering information

<b>CNZ</b>	<b>1J</b>	<b>4</b>	<b>A</b>	<b>T</b>	<b>TD</b>
<b>Type</b>	<b>Size</b>	<b>Elements</b>	<b>Terminal Style</b>	<b>Termination Material</b>	<b>Packaging</b>
	1E 1F 1J 2A 2B	2 4 8	Blank: Concave A: Convex/scalloped K: Convex/square N: Flat/square	T: Sn (Other termination styles may be available, please contact factory for options)	TD: 7" paper tape TE: 7" embossed plastic TDD: 10" paper tape

For further information on packaging, please refer to Appendix A.

## circuit schematic




## applications and ratings

Part Designation	Current Rating @ 70°C (Per Element)	Maximum Surge Current	Maximum Resistance	Operating Temperature Range
CNZ1E2	0.5 Amps	2.0 Amps	50mΩ	-55°C to +125°C
CNZ1E4				-55°C to +155°C
CNZ1E2K				
CNZ1E4K				
CNZ1J2K/CNZ1J4A/CNZ1J4K				
CNZ1J2/CNZ1J4				
CNZ1J8	1.0 Amps	3.0 Amps	-55°C to +125°C	
CNZ2A2				
CNZ2A4				
CNZ2B2		4.0 Amps		
CNZ2B4				
CNZ2B4A				
CNZ1F8K	2.0 Amps			

## environmental applications

### Derating Curve

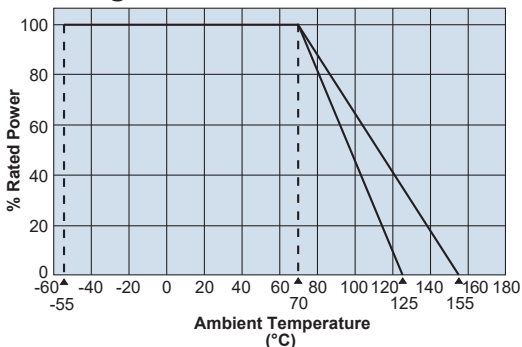


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

## features


- Thin film (metal film) resistor array on silicon wafer
- Excellent resistance matching, TCR tracking and stabilities
- Custom circuits are available with flexible layout (Different resistance combinations possible)
- High integration saves board space and overall assembly costs
- Excellent reliability with standard molded IC package
- Suitable for reflow soldering
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

## dimensions and construction


### SOT-23



### QSOP, SOIC-N



Package Symbol	Package	Pins	Dimensions inches (mm)									
			A ±0.2	B ±0.2	C ±0.2	D ±0.1	E ±0.1	F ±0.1	G ±0.1	H ±0.2	J ±0.2	K ±0.1
S03	SOT-23	3	.115 (2.92)	.091 (2.3)	.037 (0.95)	.075 (1.910)	.017 (0.44)	.005 (0.13)	.020 (0.51)	.021 (0.53)	.051 (1.3)	.004 (0.11)
Q16	QSOP	16	.193 (4.90)	.236 (5.99)	.063 (1.60)	.025 (0.635)	.010 (0.25)	.008 (0.20)	.008 (0.20)	.026 (0.66)	.150 (3.81)	.007 (0.18)
Q20		20	.341 (8.66)						.058 (1.47)			
Q24		24	.341 (8.66)						.033 (0.84)			
N08	SOIC-N	8	.190 (4.83)	.236 (5.99)	.063 (1.60)	.050 (1.27)	.016 (0.41)	.008 (0.20)	.020 (0.52)	.026 (0.66)	.150 (3.81)	.007 (0.18)
N14		14	.341 (8.66)						.020 (0.52)			
N16		16	.390 (9.91)						.020 (0.52)			

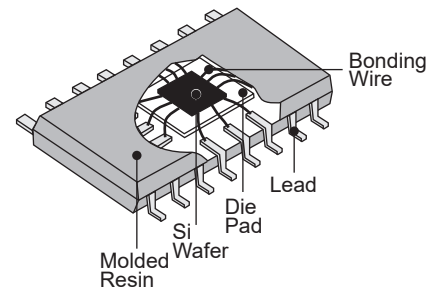

## ordering information

### RBA, RBB

RBA	Q20	T	TEB	1002	B	E	B	T
<b>Circuit Code</b>	<b>Package Symbol</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Absolute Tolerance</b>	<b>T.C.R.</b>	<b>Relative Res. Toler.</b>	<b>T.C.R. Tracking</b>
RBA: Bussed resistor network RBB: High speed bussed network	Package type symbol + number of pins Q16, Q20, Q24: QSOP N08, N14, N16: SOIC narrow	T: Sn (L: Sn/Pb)	TEB: 13" embossed plastic	B, C, D, F: 4 digits G, J: 3 digits	B: ±0.1% C: ±0.25% D: ±0.5% F: ±1% G: ±2% J: ±5%	T: ±10 E: ±25 C: ±50 H: ±100	A: ±0.05% B: ±0.1% C: ±0.25% D: ±0.5% F: ±1% G: ±2% Blank: Not specified	Y: ±05 T: ±10 E: ±25 C: ±50 Blank: Not specified

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

3/03/17

## ordering information (continued)

### RTX

<b>RTX</b>	<b>S03</b>	<b>T</b>	<b>TE</b>	<b>7011</b>
<b>Circuit Code</b>	<b>Package Symbol</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Custom Code</b>
RTX: SOT-23 Resistor network	Package type symbol + number of pins	T: Sn (L: Sn/Pb)	TE: 7" embossed plastic (RTX, RTY SOT-23 only)	

### RDA, RDB

<b>RDA</b>	<b>Q20</b>	<b>T</b>	<b>TEB</b>	<b>471J</b>	<b>511J</b>	<b>E</b>
<b>Circuit Code</b>	<b>Package Symbol</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance &amp; Tolerance of R1</b>	<b>Nominal Resistance &amp; Tolerance of R2</b>	<b>T.C.R.</b>
RDA: Dual terminator network RDB: Differential terminator network	Package type symbol + number of pins Q16, Q20: QSOP N16: SOIC narrow	T: Sn (L: Sn/Pb)	TEB: 13" embossed plastic	3 digits: G: ±2%, J: ±5%	3 digits: G: ±2%, J: ±5%	E: ±25 C: ±50 H: ±100

## ratings




Package	QSOP			SOIC			SOT-23
Package Symbol	Q16	Q20	Q24	N08	N14	N16	S03
<b>Package Power Rating</b>	0.8W	1.0W	1.0W	0.4W	0.6W	0.8W	0.2W
<b>Resistance</b>	Power rating 200mW/resistor element *						
<b>Range</b>	Power rating 50mW/resistor element *						
<b>Max. Working Voltage</b>	100V						
<b>Rated Voltage</b>	$\sqrt{\text{Rated power} \times \text{nominal resistance value}}$ , rated voltage should not exceed max. working voltage						
<b>Rated Ambient Temp.</b>	+70°C						
<b>Operating Temp. Range</b>	-55°C ~ +125°C **						

Above ratings are based on the thermal resistance using multi-layer circuit board (EIA/JESD51). For mounting on a mono-layer board, power derating shall be needed. Please contact us about conditions.

\* Total power consumption of all elements should not exceed the package power rating.




\*\* About operating temperature range -55°C ~ +155°C. We can provide custom devices. Please contact us.

## applications and ratings

Circuit Code	Circuit Schematics	Number of Pins	T.C.R. (x10 <sup>-6</sup> /K)	Resistance Range (Ω) E24 & Absolute Tolerance	
				F: ±1%	G: ±2%, J: ±5%
RBA		8, 14, 16, 20, 24	E: ±25	100 ~ 100k	100 ~ 100k
			C: ±50	51 ~ 100k	51 ~ 100k
			H: ±100	30 ~ 100k	10 ~ 100k
RBB		8, 14, 16, 20, 24	E: ±25	100 ~ 100k	100 ~ 100k
			C: ±50	51 ~ 100k	51 ~ 100k
			H: ±100	30 ~ 100k	10 ~ 100k
RTX, RTY		3(SOT-23 only)	E: ±25	100 ~ 40k	100 ~ 40k
			C: ±50	51 ~ 40k	51 ~ 40k
			H: ±100		



## applications and ratings (continued)

Circuit Code	Circuit Schematics	Number of Pins	T.C.R.	Resistance Range ( $\Omega$ ) E24 & Absolute Tolerance G: $\pm 2\%$ , J: $\pm 5\%$
RDA		16, 20	E: $\pm 25$	R1= 150 ~ 10k R1: R2= 1:1 ~ 1:4
			C: $\pm 50$	
			H: $\pm 100$	
RDB		16, 20	E: $\pm 25$	R1= 150 ~ 10k R1: R2= 1:1 ~ 1:4
			C: $\pm 50$	
			H: $\pm 100$	
RLA		14, 16	H: $\pm 100$	1k ~ 30k


## environmental applications

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance		25°C
T.C.R.	Within specified T.C.R.		+25°C/-55°C, +25°C/+125°C
Resistance to Soldering Heat	$\pm 0.1\%$	$\pm 0.05\%$	260°C $\pm 5^\circ\text{C}$ , 10 seconds $\pm 1$ second
Rapid Change of Temperature	$\pm 0.5\%$	$\pm 0.05\%$	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	$\pm 0.5\%$	$\pm 0.05\%$	40°C $\pm 2^\circ\text{C}$ , 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	$\pm 0.25\%$	$\pm 0.05\%$	70°C $\pm 2^\circ\text{C}$ , 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	$\pm 0.25\%$	$\pm 0.1\%$	+125°C, 1000 hours

**features**

- High precision resistor networks
- Combination of different resistance is available for custom circuit
- Relative resistance tolerance 0.05%~
- TCR tracking  $5 \times 10^{-6}/K$ ~
- Marking: Black body color



**ordering information**

**RIA**

<b>RIA</b>	<b>Q20</b>	<b>T</b>	<b>TEB</b>	<b>1002</b>	<b>B</b>	<b>E</b>	<b>B</b>	<b>T</b>
<b>Circuit Code</b>	<b>Package Symbol</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Absolute Tolerance</b>	<b>T.C.R.</b>	<b>Relative Res. Toler.</b>	<b>T.C.R. Tracking</b>
RIA: Isolated resistor network	Package type symbol + number of pins Q16, Q20, Q24: QSOP N08, N14, N16: SOIC narrow	T: Sn (L: Sn/Pb)	TEB: 13" embossed plastic	4 digits	B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$ F: $\pm 1\%$	T: $\pm 10$ E: $\pm 25$ C: $\pm 50$ H: $\pm 100$	A: $\pm 0.05\%$ B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$ F: $\pm 1\%$ G: $\pm 2\%$ Blank: Not specified	Y: $\pm 05$ T: $\pm 10$ E: $\pm 25$ C: $\pm 50$ Blank: Not specified

**RNX**

<b>RNX</b>	<b>Q20</b>	<b>T</b>	<b>TEB</b>	<b>5128</b>
<b>Circuit Code</b>	<b>Package Symbol</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Custom Code</b>
RNX: Custom Resistor network	Package type symbol + number of pins	T: Sn (L: Sn/Pb)	TEB: 13" embossed plastic	

For further information on packaging, please refer to Appendix A.


**ratings**

Product Code	Number of Pins	T.C.R.	Resistance Range ( ) (E24) and Resistance Tolerance					Relative Resist. Tol.	TCR Tracking
			B: $\pm 0.1\%$	C: $\pm 0.25\%$	D: $\pm 0.5\%$	F: $\pm 1\%$	G: $\pm 2\%$ , J: $\pm 5\%$		
RIA RNX	8, 14, 16, 20, 24	T: $\pm 10$	510 $\Omega$ ~ 100k $\Omega$	510 $\Omega$ ~ 100k $\Omega$	510 $\Omega$ ~ 100k $\Omega$	510 $\Omega$ ~ 100k $\Omega$	510 $\Omega$ ~ 100k $\Omega$	0.05%, 0.1%, 0.25%, 0.5%, 1%, 2%	5, 10, 25, 50
		E: $\pm 25$			100 $\Omega$ ~ 510k $\Omega$	100 $\Omega$ ~ 510k $\Omega$	100 $\Omega$ ~ 510k $\Omega$		
		C: $\pm 50$			51 $\Omega$ ~ 510k $\Omega$	51 $\Omega$ ~ 510k $\Omega$	51 $\Omega$ ~ 510k $\Omega$		
		H: $\pm 100$			30 $\Omega$ ~ 510k $\Omega$	10 $\Omega$ ~ 510k $\Omega$	10 $\Omega$ ~ 510k $\Omega$		

Please ask about your custom devices and circuits (Different resistance combinations available). Depending on the circuit and package, much higher resistances are possible. For RIA20, 24 pin, highest resistance value/element is up to 100k $\Omega$


**circuit schematic**

**RIA - High Precision Resistor Networks**




Please ask about your custom devices and circuits.


**RNX - Custom High Precision Resistor Networks**

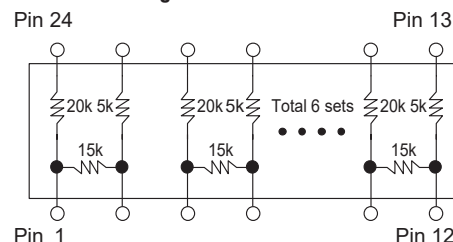

**environmental applications**  
**Derating Curve**

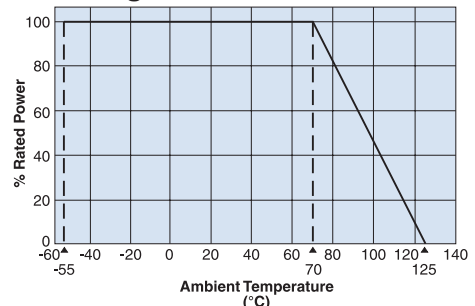

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

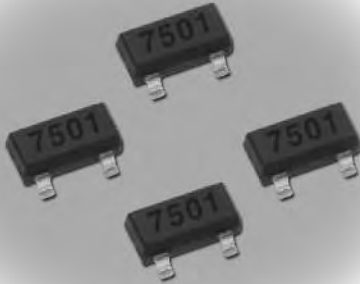

## features

- Expanded flexibility of component layout
- Relative precision of pair resistors are guaranteed
- Relative resistance tolerance 0.05% ~
- TCR tracking  $5 \times 10^{-6} \text{K}^{-1}$

## ordering information


<b>RTY</b>	<b>S03</b>	<b>T</b>	<b>TE</b>	<b>7516</b>
<b>Circuit Code</b>	<b>Package Symbol</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Custom Code</b>
RTY: SOT-23 Resistor network	Package type symbol + number of pins	T: Sn (L: Sn/Pb)	TE: 7" embossed plastic	

## ratings

Product Code	T.C.R.	Resistance Range ( $\Omega$ ) (E24) and Resistance Tolerance					Relative Resist. Tol.	TCR Tracking
		B: $\pm 0.1\%$	C: $\pm 0.25\%$	D: $\pm 0.5\%$	F: $\pm 1\%$	G: $\pm 2\%$ , J: $\pm 5\%$		
RTY	T: $\pm 10$	1k $\Omega$ ~ 40k $\Omega$	1k $\Omega$ ~ 40k $\Omega$	1k $\Omega$ ~ 40k $\Omega$	1k $\Omega$ ~ 40k $\Omega$	1k $\Omega$ ~ 40k $\Omega$	0.05%, 0.1%, 0.25%, 0.5%, 1%, 2%	5, 10, 25, 50
	E: $\pm 25$	1k $\Omega$ ~ 150k $\Omega$	1k $\Omega$ ~ 150k $\Omega$	100 $\Omega$ ~ 150k $\Omega$	100 $\Omega$ ~ 150k $\Omega$	100 $\Omega$ ~ 150k $\Omega$		
	C: $\pm 50$			51 $\Omega$ ~ 200k $\Omega$	51 $\Omega$ ~ 200k $\Omega$	51 $\Omega$ ~ 200k $\Omega$		
	H: $\pm 100$			30 $\Omega$ ~ 200k $\Omega$	30 $\Omega$ ~ 200k $\Omega$	30 $\Omega$ ~ 200k $\Omega$		

Please ask about your custom devices and circuits. (Different resistance combination available) Depending on the circuit and package, much higher resistances are possible. For RIA20, 24 pin, highest resistance value/element is up to 100k $\Omega$ .


## circuit schematic



## ratings


Package Symbol	Package	Number of Pins	Package Power Rating (W)
S03	SOT-23	3	0.2

## example of application

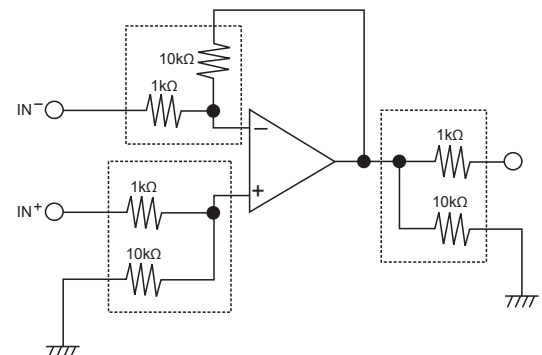

## typical characteristics

Endurance at 70°C (Typical: 1k $\Omega$ , 8 resistors/package)

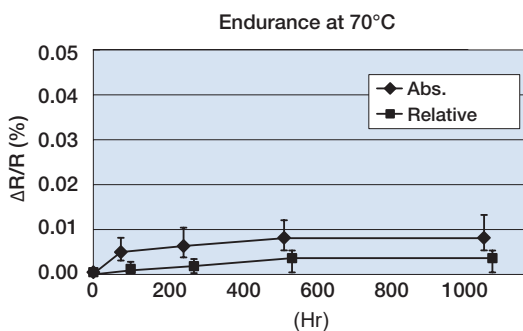


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


11/15/17

### features

- Thin film construction
- Surface mount package
- Stable resistor technology
- High component density
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

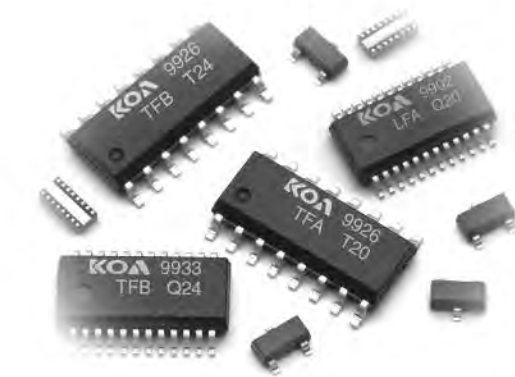


### dimensions and construction

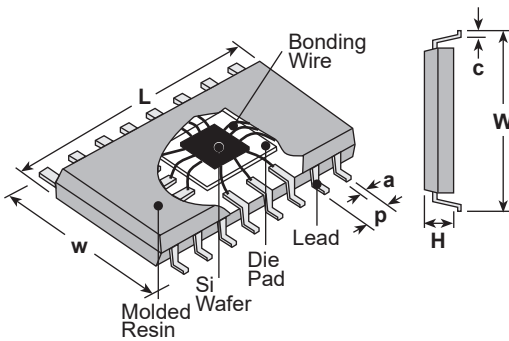


Package Code	Total Power	Pins	Dimensions inches (mm)						
			L ±0.2	W ±0.2	w ±0.2	H ±0.2	p ±0.1	a ±0.1	c ±0.1
Q20	1 watt	20	.341 (8.66)	.236 (5.99)	.150 (3.81)	.063 (1.60)	.025 (0.635)	.010 (0.25)	.026 (0.66)
Q24	1 watt	24	.341 (8.66)	.236 (5.99)	.150 (3.81)	.063 (1.60)	.025 (0.635)	.010 (0.25)	.026 (0.66)


### circuit schematic

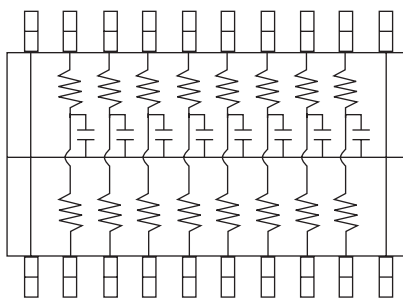

TFA: 20 pins

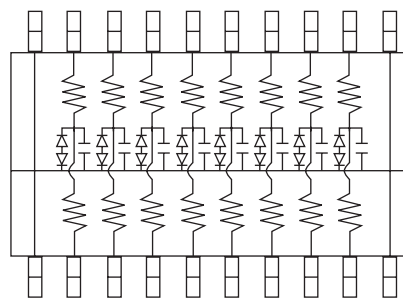

TFB: 20 pins

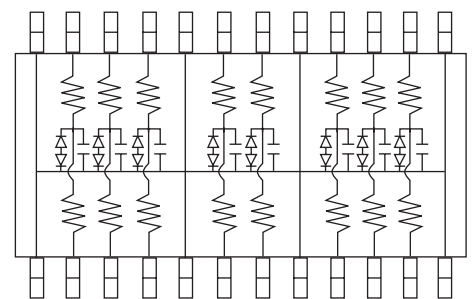

TFB: 24 pins

### ordering information


<b>TFB</b>	<b>Q20</b>	<b>T</b>	<b>TEB</b>	<b>250</b>	<b>K</b>	<b>201</b>	<b>M</b>
<b>Type</b>	<b>Package Code</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>	<b>Nominal Capacitance</b>	<b>Tolerance</b>
TFA TFB	Reference above table	T: Sn (Other termination styles available, contact factory for options)	TEB: 13" embossed plastic tape	2 significant digits + number of zeros	K: ±10%	2 significant digits + number of zeros	M: ±20%

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

1/24/14

## Parallel Termination

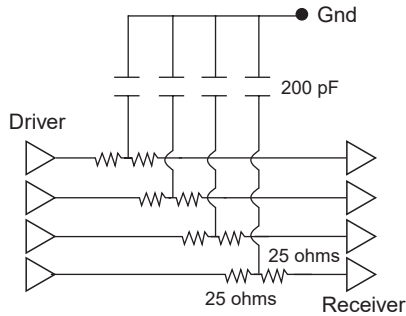

## applications and ratings

Part Designation	Power Rating @ 70°C (Per Element)	T.C.R. (ppm/°C)	Capacitor Voltage Rating	Operating Temperature Range	Resistance Range Ω (E-24)	Resistance Tolerance	Capacitor Range pF (E-24)	Capacitor Tolerance	ESD* Rating IEC 61000-4-2	Diode* Breakdown Voltage (@1ma)
TFA TFB	100mW	±200	20V	-55°C to +155°C	10 ~ 1,000	K: ±10%	33 ~ 400pF	M: ±20%	8kV*	6.5v Min.

\* TFB only

## environmental applications

### Performance Characteristics

Parameter	Maximum Δ R	Test Method
Resistance to Soldering Heat	+0.25%	MIL-R-55342 4.7.7
Short Time Overload	+0.50%	MIL-R-55342 4.7.5
Moisture Resistance	+0.50%	MIL-STD-202 method 103
Thermal Shock	+0.50%	MIL-STD-202 method 107
H.A.S.T.	+1%	2 Atm., 121°C, 96 hrs






### features


- Fast reverse recovery time
- Fast turn on time
- Low capacitance
- SMD packages
- 16 kV IEC61000-4-2 capable
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

### dimensions and construction

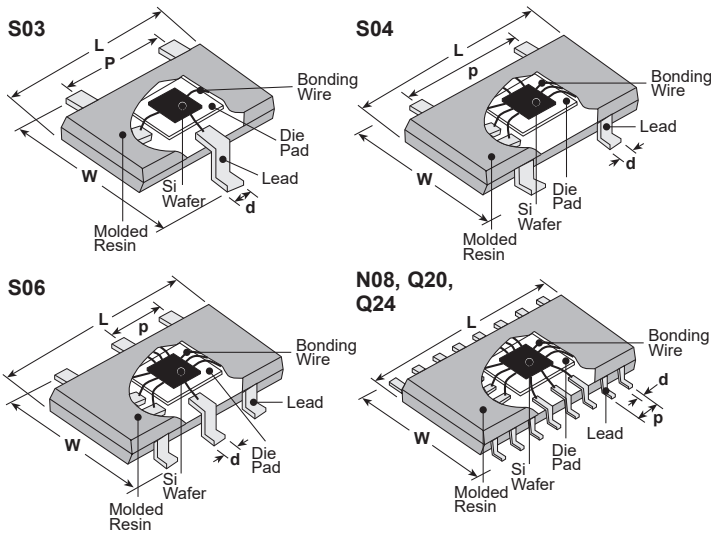

Package Code	Total Power	Pins	Dimensions inches (mm)				
			L ±0.2	W ±0.2	p ±0.1	Pkg Ht ±0.2	d ±0.05
S03	225mw	3	.115 (2.92)	.091 (2.30)	.075 (1.91)	.037 (0.95)	.017 (0.43)
S04	225mw	4	.115 (2.92)	.091 (2.30)	.075 (1.91)	.037 (0.95)	.017 (0.43)
S06	225mw	6	.115 (2.92)	.110 (2.80)	.037 (0.95)	.037 (0.95)	.017 (0.43)
N08	400mw	8	.190 (4.83)	.236 (5.99)	.050 (1.27)	.063 (1.60)	.016 (0.41)
Q20	1000mw	20	.341 (8.66)	.236 (5.99)	.025 (0.635)	.063 (1.60)	.010 (0.25)
Q24	1000mw	24	.341 (8.66)	.236 (5.99)	.025 (0.635)	.063 (1.60)	.010 (0.25)

### circuit schematic

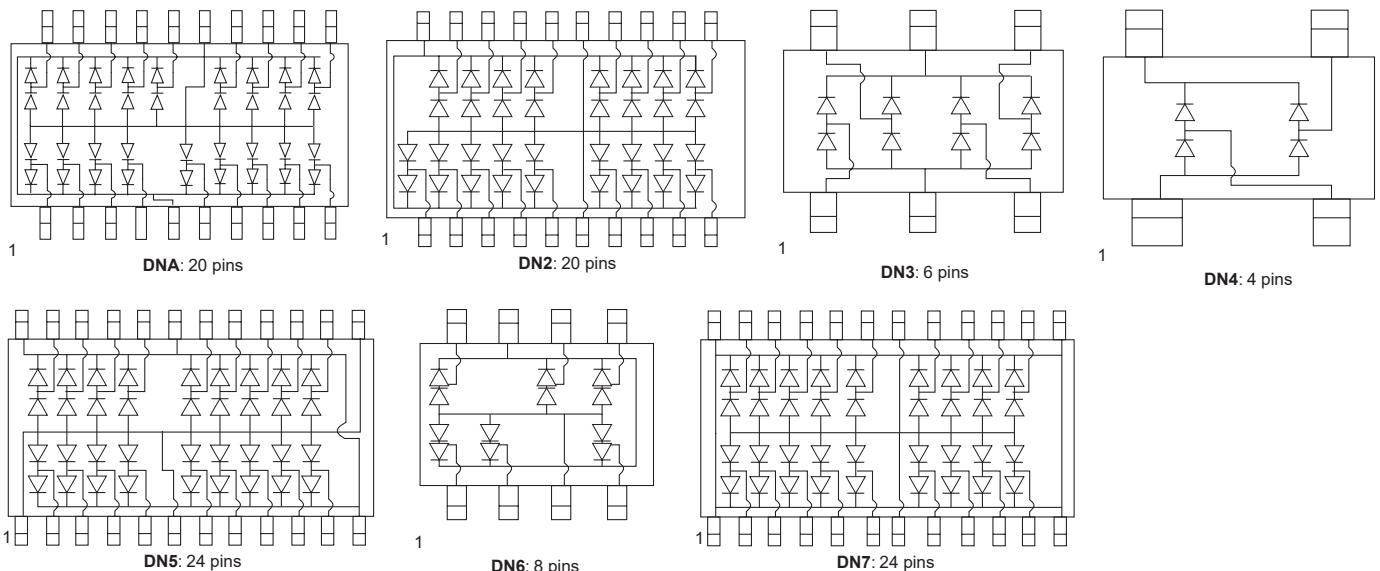

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/28/10


## ordering information

DNA	Q20	T	TEB
<b>Type</b>	<b>Package Symbol</b>	<b>Termination Material</b>	<b>Packaging</b>
DNA DN2 DN3 DN4 DN5 DN6 DN7	Package type symbol + number of pins S03: 3 pin SOT23 S04: 4 pin SOT23 S06: 6 pin SOT23 N08: 8 pin Narrow SOIC Q20: 20 pin QSOP Q24: 24 pin QSOP	T: Sn (Other termination styles available, contact factory for options)	TE: 7" embossed plastic (SOT23 only) TEB: 13" embossed plastic


For further information on packaging, please refer to Appendix A.

## application schematic

### ESD Suppression

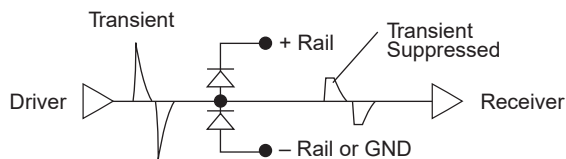

### Signal Conditioning

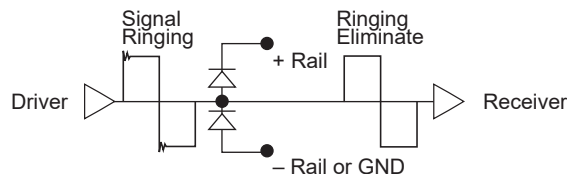

## applications and ratings

Part Designation	Forward Voltage $1f=50ma$	Reverse Breakdown Voltage $1R=1ma$	Leakage Current @7V	Capacitance @1Mhz	ESD Voltage Capability IEC 61000-4-2	Operating Temperature Range	Continuous Forward Current*
DN(X)	0.4 to 1.2V	7.2V	1uA	2pF	16kV	-55°C to +155°C	50mA


\* One diode conducting



### features

- Thin film construction
- Surface mount package
- Stable resistor technology
- High component density
- Products with lead-free terminations meet EU RoHS and China RoHS requirements


### dimensions and construction

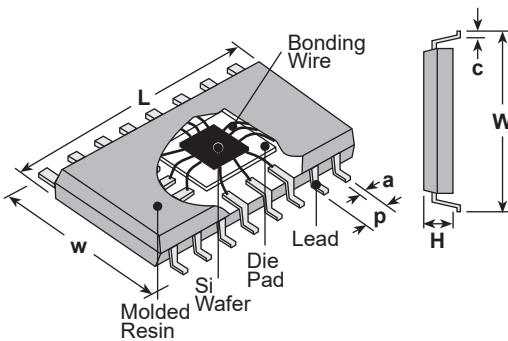

Package Code	Total Power	Pins	Dimensions inches (mm)						
			L ±0.2	W ±0.2	w ±0.2	H ±0.2	p ±0.1	a ±0.1	c ±0.1
Q20	1 watt	20	.341 (8.66)	.236 (5.99)	150 (3.81)	.063 (1.60)	.025 (0.635)	.010 (0.25)	.026 (0.66)
Q24	1 watt	24	.341 (8.66)	.236 (5.99)	150 (3.81)	.063 (1.60)	.025 (0.635)	.010 (0.25)	.026 (0.66)


### circuit schematic

Single Common

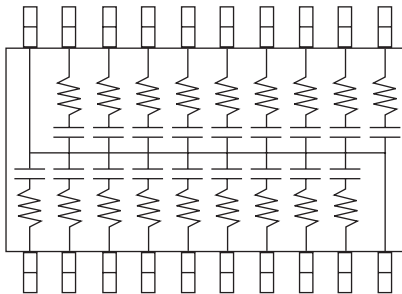


ACB: 20 pins

4 Commons

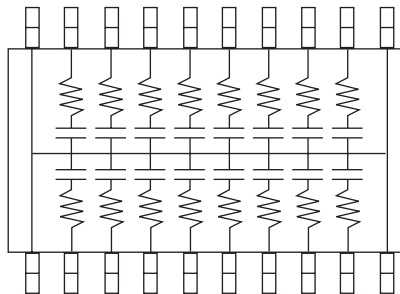

ACC: 20 pins

6 Commons

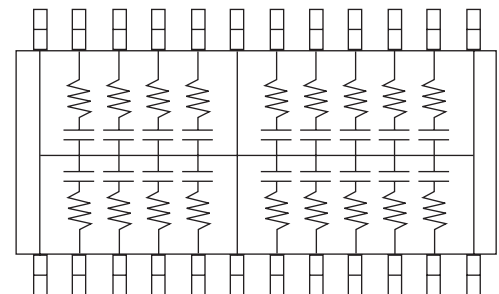

ACD: 24 pins

### ordering information


<b>ACB</b>	<b>Q20</b>	<b>T</b>	<b>TEB</b>	<b>500</b>	<b>K</b>	<b>101</b>	<b>M</b>
<b>Type</b>	<b>Package Code</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>	<b>Nominal Capacitance</b>	<b>Tolerance</b>
ACB ACC ACD	Reference above table	T: Sn (Other termination styles available, contact factory for options)	TEB: 13" embossed plastic tape	2 significant digits + number of zeros	K: ±10%	2 significant digits + number of zeros	M: ±20%

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

1/27/14

## Parallel Termination

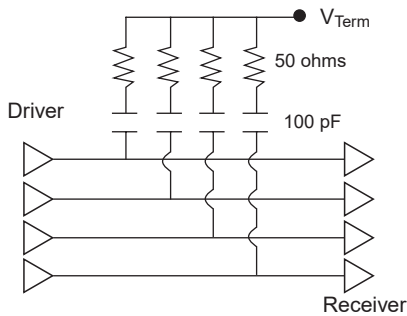

## applications and ratings

Part Designation	Power Rating @ 70°C (Per Element)	T.C.R. (ppm/°C)	Capacitor Voltage Rating	Operating Temperature Range	Resistance Range (E-24)	Resistance Tolerance	Capacitor Range pF (E-24)	Capacitor Tolerance
ACB ACC ACD	100mW	±200	20V	-55°C to +155°C	10 ~ 1,000	K: ±10%	33 ~ 400pF	M: ±20%

## environmental applications


### Performance Characteristics

Parameter	Maximum $\Delta R$	Test Method
Resistance to Soldering Heat	+0.25%	MIL-R-55342 4.7.7
Short Time Overload	+0.50%	MIL-R-55342 4.7.5
Moisture Resistance	+0.50%	MIL-STD-202 method 103
Thermal Shock	+0.50%	MIL-STD-202 method 107
H.A.S.T.	+1%	2 Atm., 121°C, 96 hrs

### features

- Ultra low resistance, suitable for large current sensing
- Excellent T.C.R. achieved ( $50 \pm 25 \times 10^{-6}/K$ )
- Correct electric current detection by a voltage pin is possible
- Bus bar and cable can be screwed on
- 2D code means individual resistance information
- Products meet EU RoHS requirements
- AEC-Q200 Qualified

### dimensions and construction\*1

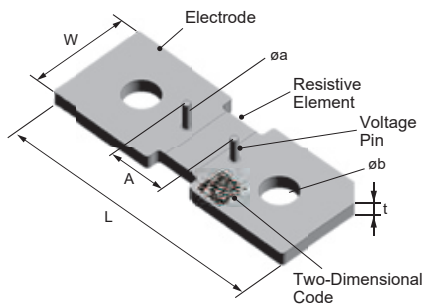

Type (Inch Size Code)	Resistance ( $\Omega$ )	Dimensions inches (mm)					
		L	W	A	$\phi a$	$\phi b$	t
HSAN2P401 5M5	0.1m	1.57 $\pm$ .010 (40.0 $\pm$ 0.25)	.591 $\pm$ .010 (15.0 $\pm$ 0.25)	.335 $\pm$ .008 (8.5 $\pm$ 0.2)	.039 $\pm$ .008 (1.0 $\pm$ 0.2)	.213 $\pm$ .004 (5.4 $\pm$ 0.1)	.079 $\pm$ .008 (2.0 $\pm$ 0.2)
	0.2m New						.039 $\pm$ .008 (1.0 $\pm$ 0.2)

\*1 Contact KOA factory for custom type request

### ordering information

<b>HS</b>	<b>A</b>	<b>N</b>	<b>2P</b>	<b>4015</b>
Type	Size	Surface Condition	Number of Voltage Pin	Outward Form Size
HS	A: 5mm x 11mm	N: No surface treatment	0P: 0 pin *2 2P: 2 pin *2	4015: Length *1 x Width
<b>M5</b>	<b>PT</b>	<b>L10</b>	<b>J</b>	<b>Y</b>
Fastening Hole	Packing Form	Nominal Resistance	Resistance Tolerance	2D Code
M5: M5 Hole *1	PT: Tray	L10: 0.1m L20: 0.2m	J: $\pm$ 5%	Nil: Non code Y: With Resistance Value

\*1 Contact KOA factory for custom type request

\*2 Standard voltage pin:  $\phi$ 1mm, length 4mm, Sn plating. Contact KOA factory for custom type request

Contact KOA factory when you have control request for environmental hazardous material other than the substance specified by EU-RoHS




## applications and ratings

Part Designation	Power Rating*3	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range (Ω)	Rated Terminal Part Temp.	Operating Temp. Range
HSAN2P	36W (600A)	50±25	0.1m	105°C	-65°C to +175°C
	18W (300A)		0.2m <b>New</b>		

\*3 A power rating shall be guaranteed with a method shown in the item (: Performance)

## environmental applications

### Derating Curve

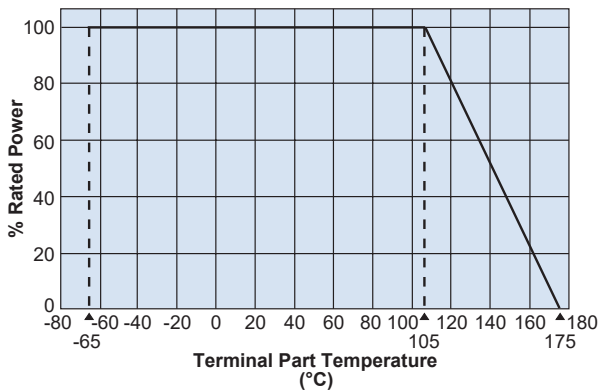

For resistors operated terminal temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve above.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.005\Omega)$ Limit	Test Method
T.C.R.	Within specified T.C.R.	+25°C/+100°C
Rapid Change of Temperature	±0.5%	-55°C (30 minutes), +150°C (30 minutes), 1000 cycles
Endurance at 105°C and less of Terminal Part Temperature	±1%	105°C ± 3°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Low Temperature Exposure	±0.5%	-65°C, 1000 hours
High Temperature Exposure	±1%	+175°C, 1000 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


10/25/18

## features

- Ultra low resistance, suitable for large current sensing
- Automatic mounting machines are applicable
- Suitable for reflow soldering (Not suitable for flow soldering)
- Products meet EU RoHS requirements
- AEC-Q200 qualified



## dimensions and construction

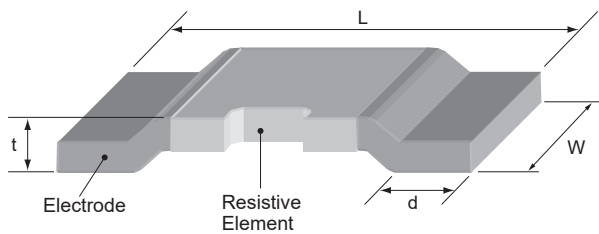

Type (Inch Size Code)	Resist. (Ω)	Dimensions inches (mm)			
		L	W	d	t
PSJ2 (3920)	0.2m	.394±.010 (10.0±0.25)	.205±.010 (5.2±0.25)	.079±.010 (2.0±0.25)	.078±.008 (1.98±0.2)
	0.5m				.05±.008 (1.27±0.2)
	1m				.035±.008 (0.89±0.2)
	NEW 2m				.046±.008 (1.17±0.2)
	NEW 3m				.037±.008 (0.95±0.2)
	NEW 4m				.033±.008 (0.84±0.2)
	PSL2 (2512)				0.2m
0.3m		.052±.006 (1.32±0.15)			
0.5m		.044±.006 (1.12±0.15)			

## ordering information

<b>PS</b>	<b>J</b>	<b>2</b>	<b>N</b>	<b>TEB</b>	<b>L500</b>	<b>F</b>
Type	Power Rating	Termination Number	Termination Material	Packaging	Nominal Resistance	Tolerance
	J: 0.2m: 12W 0.5m: 10W 1m: 8W <b>New</b> 2m: 6W <b>New</b> 3m: 5W <b>New</b> 4m: 5W <b>New</b> L: 0.2m: 9W 0.3m: 8W 0.5m: 8W		N: No surface treatment	TEB: 8mm pitch plastic embossed	4 digits: all values less than 100mΩ are expressed in mΩ with "L" as decimal Ex: 0.5mΩ - L500 1mΩ = 1L00	F: ±1%

For further information on packaging, please refer to Appendix A.


## applications and ratings

Part Designation	Power Rating (Current Rating)	T.C.R. (ppm/°C) Max.	Resistance Range	Resistance Tolerance	Rated Terminal Part Temperature	Operating Temperature Range
PSJ2	12W (244A)	±200	0.2mΩ	F: ±1%	75°C	-65°C to +175°C
	10W (141A)	±100	0.5mΩ			
	8W (89A)	±75	1mΩ			
	NEW 6W (54A)	±75	2mΩ			
	NEW 5W (41A)	±50	3mΩ			
	NEW 5W (35A)	±50	4mΩ			
PSL2	9W (212A)*	250±100	0.2mΩ	F: ±1%	75°C	-65°C to +175°C
	8W (163A)	±175	0.3mΩ			
	8W (126A)	±115	0.5mΩ			

\* Under Development

## environmental applications

### Derating Curve

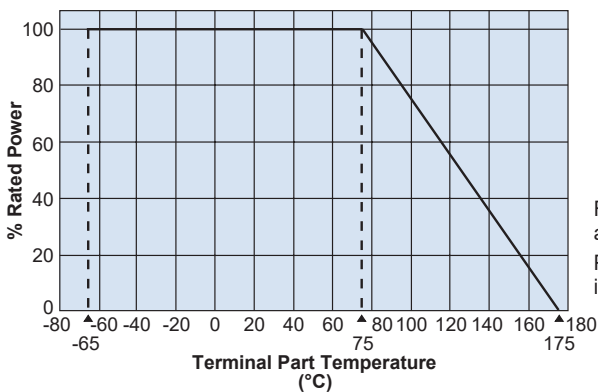

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.


### Performance Characteristics

Parameter	Requirement $\Delta R \pm\%$		Test Method
	Limit	Typical	
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Overload (Short time)	±0.5%	±0.1%	PSJ (0.2m): 36W for 5 seconds; PSJ (0.5m): 30W for 5 seconds; PSJ (1m): 20W for 5 seconds; PSJ (2m): 18W for 5 seconds; PSJ (3m): 12.5W for 5 seconds; PSJ (4m): 10W for 5 seconds; PSL (0.2m): 27W for 5 seconds; PSL (0.3m, 0.5m): 24W for 5 seconds
Resistance to Solder Heat	±0.5%	±0.1%	260°C ± 5°C, 15 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.1%	-55°C (30 minutes), +150°C (30 minutes), 1,000 cycles
Moisture Resistance	±0.5%	±0.05%	85°C ± 3°C, 85% ± 3°C RH, 1000 hours, 10% Bias
Endurance at 75°C and Less of Terminal Part Temperature	±1.0%	±0.3%	Terminal part temperature: 75°C ± 3°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Low Temperature Exposure	±0.5%	±0.02%	-65°C, 1000 hours
High Temperature Exposure	±1%	±0.5%	+175°C, 1,000 hours

## features

- Correcter electric current detection is possible to 4-terminal construction
- Excellent T.C.R. achieved ( $\pm 50 \times 10^{-6}/K$ )
- Ultra low resistance, suitable for large current sensing
- Automatic mounting machines are applicable
- Suitable for reflow soldering (Not suitable for flow soldering)
- Products meet EU RoHS requirements
- AEC-Q200 qualified

## dimensions and construction

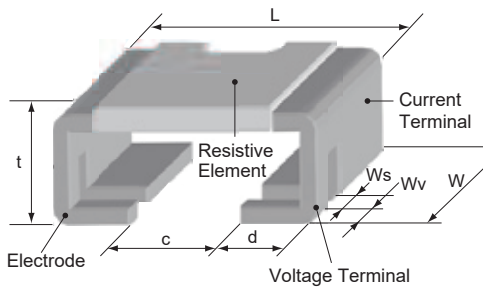

Type (Inch Size Code)	Resist. ( $\Omega$ )	Dimensions inches (mm)						
		L	W	d	C	Ws	Wv	t
PSG4 (2726)	0.5m	.272 $\pm$ .010 (6.9 $\pm$ 0.25)	.260 $\pm$ .010 (6.6 $\pm$ 0.25)	.079 $\pm$ .004 (2.0 $\pm$ 0.1)	—	.039 $\pm$ .004 (1.0 $\pm$ 0.1)	.028 $\pm$ .010 (0.7 $\pm$ 0.1)	.120 $\pm$ .008 (3.05 $\pm$ 0.2)
	1m							.110 $\pm$ .008 (2.8 $\pm$ 0.2)
PSF4 (1216)	0.5m	.118 $\pm$ .004 (3.0 $\pm$ 0.1)	.150 $\pm$ .004 (3.8 $\pm$ 0.1)	—	.037 $\pm$ .006 (0.95 $\pm$ 0.15)	.028 $\pm$ .002 (0.7 $\pm$ 0.05)	.020 $\pm$ .002 (0.5 $\pm$ 0.05)	.071 $\pm$ .004 (1.8 $\pm$ 0.1)
	1m							

## ordering information

<b>PS</b>	<b>G</b>	<b>4</b>	<b>N</b>	<b>TEB</b>	<b>L500</b>	<b>F</b>
Type	Power Rating G: 0.5m: 10W 1m: 8W F: 0.5m: 5W 1m: 3W	Termination Number	Termination Material N: No surface treatment	Packaging TEB: 12mm pitch plastic embossed	Nominal Resistance 4 digits: all values less than 100m $\Omega$ are expressed in m $\Omega$ with "L" as decimal Ex: 0.5m $\Omega$ - L500 1m $\Omega$ - 1L00	Tolerance F: $\pm 1\%$

Contact us when you have control request for environmental hazardous material other than the substance specified by EU RoHS.


For further information on packaging, please refer to Appendix A.

## applications and ratings

Part Designation	Power Rating (Current Rating)	T.C.R. (ppm/°C) Max.	Resistance Range	Resistance Tolerance	Rated Terminal Part Temperature	Operating Temperature Range
PSG4	10W (141A)	±50	0.5mΩ	F: ±1%	75°C	-65°C to +175°C
	8W (89A)		1mΩ			
PSF4	5W (100A)	±50	0.5mΩ	F: ±1%	130°C	
	3W (54A)		1mΩ			

## environmental applications

### Derating Curve

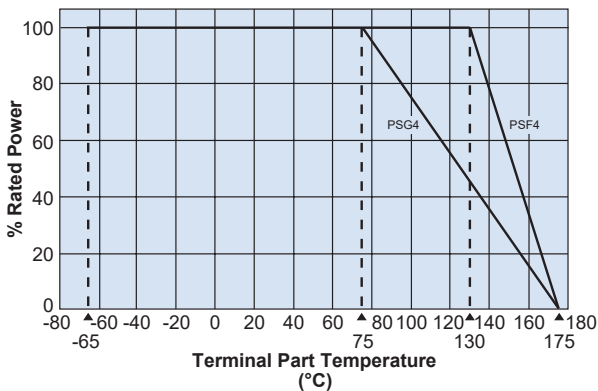

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

## Performance Characteristics


Parameter	Requirement $\Delta R \pm\%$		Test Method
	Limit	Typical	
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Overload (Short time)	±0.5%	±0.1%	PSG4 (0.5mΩ): 30W for 5 seconds; PSG4 (1mΩ): 20W for 5 seconds PSF4 (0.5mΩ): 15W for 5 seconds; PSF4 (1mΩ): 9W for 5 seconds
Resistance to Solder Heat	±0.5%	±0.1%	260°C ± 5°C, 15 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.1%	-55°C (30 minutes), +150°C (30 minutes), 1,000 cycles
Moisture Resistance	±0.5%	±0.05%	85°C ± 3°C, 85% ± 3°C RH, 1000 hours, 10% Bias
Endurance of Rated Terminal Part Temperature	±1.0%	±0.5%	PSG4: Terminal part temperature: 75°C ± 3°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle PSF4: Terminal part temperature: 130°C ± 3°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Low Temperature Exposure	±0.5%	±0.01%	-65°C, 1000 hours
High Temperature Exposure	±1%	±0.6%	+175°C, 1,000 hours



### features

- Smooth current flow, suitable for large current detecting
- Easy to absorb the thermal expansion, because of KOA's original terminal structure
- Low height suitable for use of thin modules
- Automatic mounting machines are applicable
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- AEC-Q200 Qualified

### dimensions and construction

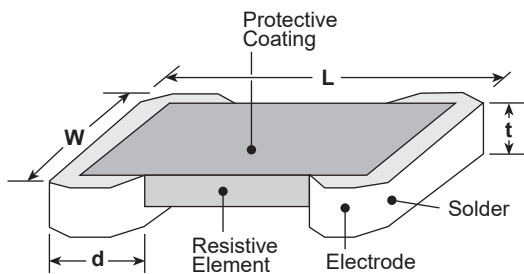

Type (Inch Size Code)	Resist. ( $\Omega$ )	Dimensions inches (mm)			
		L	W	d	t
PSB (4033)	0.2m			.150 $\pm$ .010 (3.8 $\pm$ 0.25)	.043 $\pm$ .010 (1.1 $\pm$ 0.25)
	0.75m	.394 $\pm$ .010 (10.0 $\pm$ 0.25)	.331 $\pm$ .010 (8.4 $\pm$ 0.25)	.138 $\pm$ .010 (3.5 $\pm$ 0.25)	.026 $\pm$ .010 (0.65 $\pm$ 0.25)
	1.0m			.118 $\pm$ .010 (3.0 $\pm$ 0.25)	

### ordering information

<b>PS</b>	<b>B</b>	<b>T</b>	<b>TEB</b>	<b>1L00</b>	<b>F</b>
Type	Power Rating	Termination Material	Packaging	Nominal Resistance	Tolerance
	B: New 12.5W: 0.2m $\Omega$ 6W: 0.75m $\Omega$ , 1m $\Omega$	T: Sn	TEB: Embossed plastic	All values less than 0.1 $\Omega$ (100m $\Omega$ ) are expressed in m $\Omega$ with "L" as decimal Ex: 0.75m $\Omega$ = L750 1m $\Omega$ = 1L00	F: $\pm$ 1%


For further information on packaging, please refer to Appendix A.

## applications and ratings

Part Designation	Power Rating	T.C.R. (ppm/°C) Max.	Resistance Range	Resistance Tolerance	Rated Terminal Part Temperature	Operating Temperature Range
PSB	6W	±75	0.75mΩ, 1mΩ	F: ±1%	+105°C	-65°C to +155°C
	New 12.5W	±100	0.2mΩ			

## environmental applications

### Derating Curve

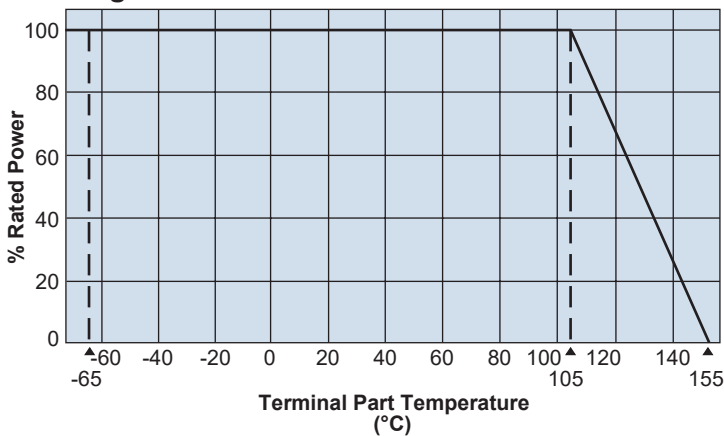

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

## Performance Characteristics


Parameter	Requirement $\Delta R \pm\%$		Test Method
	Limit	Typical	
T.C.R.	Within specified T.C.R.	—	+25°C/+100°C
Overload (Short time)	0.2mΩ: 1.0% 0.75mΩ, 1.0mΩ: ±0.5%	±0.1%	0.2m: 35W for 5 seconds Rated power x 2.5 for 5 seconds Use our designated aluminum circuit board & heat sink
Resistance to Solder Heat	0.2mΩ: 1.0% 0.75mΩ, 1.0mΩ: ±0.5%	±0.2%	0.75m, 1m: 260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	0.2mΩ: 1.0% 0.75mΩ, 1.0mΩ: ±0.5%	±0.1%	0.2m: -55°C (30 minutes), +125°C (30 minutes), 1,000 cycles 0.75m, 1.0m: -40°C (30 minutes), +125°C (30 minutes), 1,000 cycles
Moisture Resistance	0.2mΩ: 1.0% 0.75mΩ, 1.0mΩ: ±0.5%	±0.1%	85°C ± 2°C, 85% RH, 1000 hours, 10% Bias
Endurance at 105°C and Less of Terminal Part Temperature	±1.0%	±0.1%	Terminal part temperature: 105°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle. Use our designated aluminum circuit board
Low Temperature Exposure	0.2mΩ: 1.0% 0.75mΩ, 1.0mΩ: ±0.5%	±0.1%	-65°C, 96 hours
High Temperature Exposure	±1%	±0.1%	+155°C, 1,000 hours

**features**


- Smooth current flow, suitable for large current detecting
- Flat structure, applicable for strong mounting
- Automatic mounting machines are applicable
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- AEC-Q200 Qualified

current sense

**dimensions and construction**

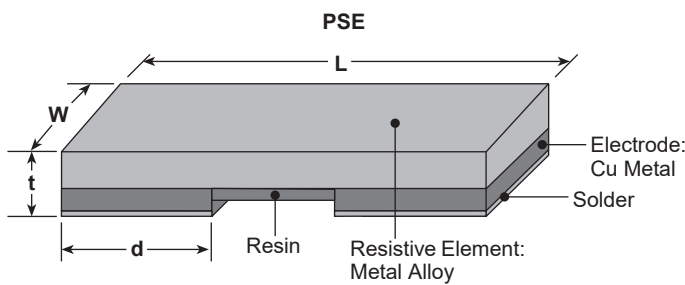

Type (Inch Size Code)	Resist. (Ω)	Dimensions inches (mm)			
		L	W	d	t
<b>PSI (3920)</b>	3.0m	.394±.010 (10.0±0.25)	.205±.010 (5.2±0.25)	.079±.010 (2.0±0.25)	.028±.010 (0.7±0.25)
	4.0m				
<b>PSE (2525)</b>	0.5m	.252±.010 (6.4±0.25)	.252±.010 (6.4±0.25)	.087±.010 (2.2±0.25)	.026±.010 (0.65±0.25)
	1.0m				.019±.010 (0.50±0.25)
	1.5m, 2.0m				

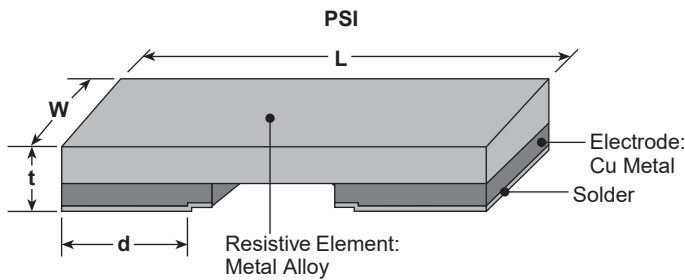

**ordering information**

<b>PS</b>	<b>I</b>	<b>D</b>	<b>TEB</b>	<b>3L00</b>	<b>F</b>
Type	Power Rating I: 3W E: 3W E: 5W	Termination Material D: SnAgCu	Packaging TE: embossed plastic (PSE: 2,000 pieces/reel) TEB: embossed plastic (PSI: 3,000 pieces/reel)	Nominal Resistance ±1%: 4 digits ±5%: 3 digits All values less than 0.1Ω (100mΩ) are expressed in mΩ with "L" as decimal Ex: 1mΩ = 1L00	Tolerance F: ±1% J: ±5%



For further information on packaging, please refer to Appendix A.

## applications and ratings

Part Designation	Power Rating	T.C.R. (ppm/°C) Max.	Resistance Range		Rated Terminal Part Temperature	Operating Temperature Range
			F: ±1%	J: ±5%		
PSI	3W	±50	3mΩ, 4mΩ	—	+105°C	-65°C to +155°C
PSE	3W	±150	0.5mΩ, 1.0mΩ 1.5mΩ, 2.0mΩ	0.5mΩ, 1mΩ, 1.5mΩ, 2mΩ	+105°C	
	5W				0.5mΩ, 1mΩ: +105°C 1.5mΩ: 85°C 2mΩ: +70°C	

## environmental applications

### Derating Curve

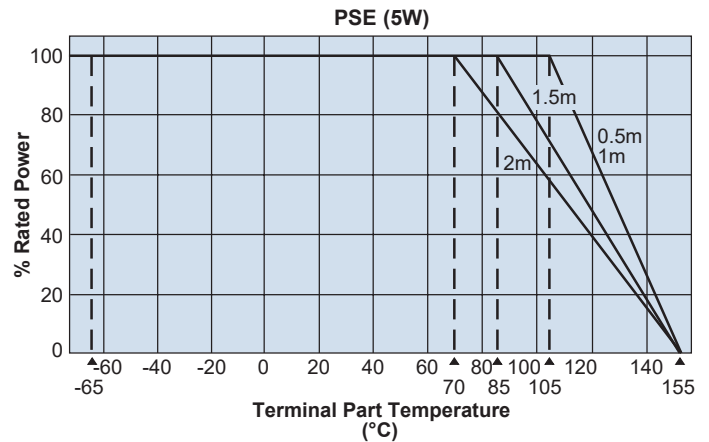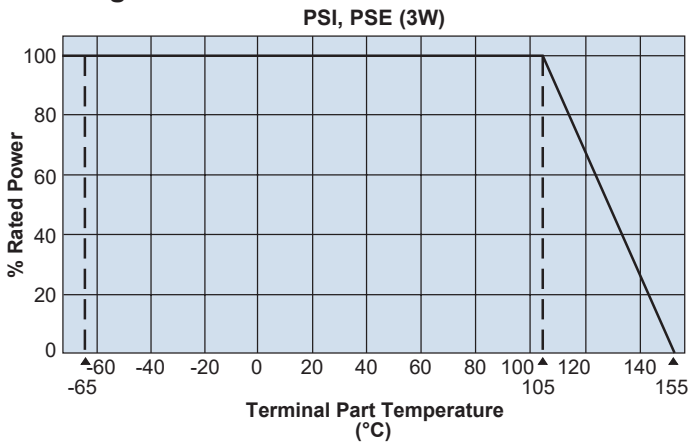

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.


## Performance Characteristics

Parameter	Requirement $\Delta R \pm\%$		Test Method
	Limit	Typical	
T.C.R.	Within specified T.C.R.	—	+25°C/+100°C
Overload (Short time)	±0.2%: PSI ±0.5%: PSE	±0.1%: PSI ±0.2%: PSE	15W for 5 seconds
Resistance to Solder Heat	±0.5%	±0.1%	260°C ± 5°C, 15 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.2%	-55°C (30 minutes), +125°C (30 minutes), 1,000 cycles
Moisture Resistance	±0.5%	±0.2%	85°C ± 2°C, 85% RH, 1000 hours, 10% Bias
Endurance at and Less of Terminal Part Temperature	±1.0%	±0.2%: PSI ±0.6%: PSE	Terminal part temperature: 105°C (PSI, PSE (3W), PSE (5W) 0.5m, 1.0m) +85°C (PSE (5W) 1.5m) +70°C (PSE (5W) 2.0m), 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Low Temperature Exposure	±0.5%	±0.02%: PSI ±0.1%: PSE	-65°C, 96 hours
High Temperature Exposure	±1%	±0.4%: PSI ±0.6%: PSE	+155°C, 1,000 hours

### features

- SMD type of small size, metal plate low resistance resistor for current detection
- Low height suitable for use of small equipment such as mobile phone
- High reliability and performance with T.C.R  $\pm 100 \times 10^{-6}/K$
- Suitable for reflow soldering (Not suitable for flow soldering)
- Products meet EU RoHS requirements
- AEC-Q200 Qualified 0805 (2A)

### dimensions and construction

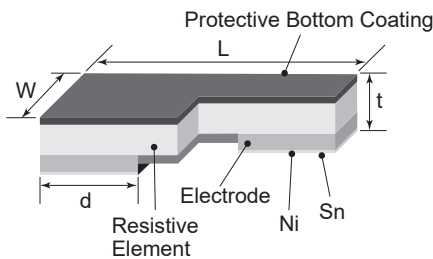

Size Code	Resistance	Dimensions inches (mm)			
		L	W	d	t
TLR1E (0402)	10mΩ	.039±.002 (1.00±0.05)	.020±.002 (0.50±0.05)	.012±.004 (0.30±0.10)	.010±.004 (0.25±0.10)
	2mΩ			.024±.008 (0.60±0.20)	.012±.006 (0.30±0.15)
TLR2A (0805)	3mΩ			.024±.008 (0.60±0.20)	.010±.006 (0.25±0.15)
	4mΩ			.018±.008 (0.45±0.20)	
	5mΩ			.026±.008 (0.65±0.20)	
	6mΩ	.079±.008 (2.00±0.20)	.049±.008 (1.25±0.20)	.022±.008 (0.55±0.20)	.012±.006 (0.30±0.15)
	7mΩ			.020±.008 (0.50±0.20)	
	8mΩ			.020±.008 (0.50±0.20)	
	9mΩ			.018±.008 (0.45±0.20)	.016±.006 (0.26±0.15)
	10mΩ			.014±.008 (0.35±0.20)	

### ordering information

<b>TLR</b>	<b>1E</b>	<b>T</b>	<b>TP</b>	<b>10L0</b>	<b>J</b>
Type	Power Rating	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance
TLR	1E: 0.2W 2A: 1W	T: Sn	TP: 7" 2mm pitch punch paper TD: 7" 4mm pitch punch paper	±1%: 4 digits ±2%, ±5%: 3 digits All values less than 0.1Ω (100m) are expressed in mΩ with "L" as decimal Ex: 1mΩ = 1L00	F: ±1% G: ±2% J: ±5%

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/08/17




### applications and ratings

Part Designation	Power Rating	Current Rating	T.C.R. (ppm/°C) Max.	Standard Resistance (Ω)	Resistance Tolerance	Rated Terminal Part Temperature	Connection Temperature	Operating Temperature Range
TLR1E	0.2W	—	±100	10m	G: ±2%, J: ±5%	105°C	—	-65°C to +125°C
TLR2A	1W	—	±100	2m, 3m, 4m, 5m, 6m, 7m, 8m, 9m, 10m	F: ±1%	105°C	—	-65°C to +155°C




### environmental applications

#### Derating Curve

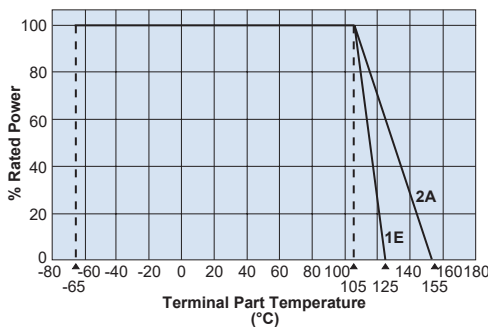

For resistors operated at an ambient temperature of 105°C or above, a power rating shall be derated in accordance with the above derating curve.

#### Temperature Rise



For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### Performance Characteristics

Parameter	Requirement Δ R %		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Overload (Short time)	±1	1E: ±0.15 2A: ±0.05	1E: Rated power x 5 for 5 seconds; 2A: Rated power x 2.5 for 5 seconds
Resistance to Solder Heat	±1	±0.01	260°C ± 5°C, 10 ~ 12 seconds
Rapid Change of Temperature	±1	±0.2	1E: -55°C (30 minutes), +125°C (30 minutes), 1000 cycles 2A: -55°C (15 minutes), +150°C (15 minutes), 1000 cycles
Moisture Resistance	±1	±0.3	85°C, 85%RH, 1000 hours, 10% Bias
Endurance at 105°C and Less of Terminal Part Temperature	±1	±0.4	Terminal part temperature: 105°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Low Temperature Exposure	±1	±0.05	-65°C, 96 hours
High Temperature Exposure	1E: ±1 2A: ±1 (2~4m, 7~10m) ±2 (5m, 6m)	1E: ±0.3 2A: ±0.5 (2~4m, 7~10m) ±0.8 (5m, 6m)	1E: 125°C, 1000 hours 2A: 155°C, 1000 hours


Note: Please contact factory for the TLRZ Performance Characteristics

### features

- Ultra-low TCR (+50ppm/°C) available
- Metal alloy: superior corrosion and heat resistance
- Applications include current sensing, voltage division and pulse applications
- Ultra low resistance (0.5mΩ - 20mΩ)
- Suitable for reflow soldering (Not suitable for flow soldering)
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- AEC-Q200 Qualified

current sense

### dimensions and construction

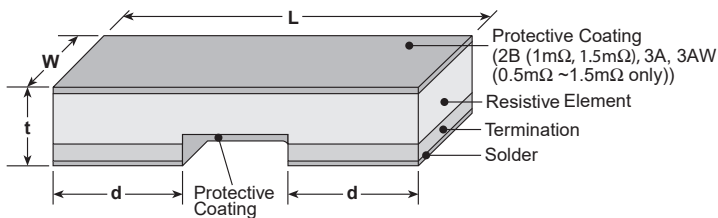

Size Code	Resistance	Dimensions inches (mm)			
		L	W	d	t
TLR2B	1m 1.5m	.126±.008 (3.20±0.20)	.063±.008 (1.60±0.20)	.043±.008 (1.10±0.20)	.024±.008 (0.60±0.20)
	2m, 3m, 4m, 5m, 6m, 7m, 8m, 9m, 10m, 11m, 12m, 13m, 15m, 16m, 18m, 20m			.020±.008 (0.50±0.20)	
TLR2H	1m	.200±.008 (5.00±0.20)	.100±.008 (2.50±0.20)	.071±.008 (1.80±0.20)	.026±.008 (0.65±0.20)
	2m - 6m			.060±.008 (1.50±0.20)	.024±.008 (0.60±0.20)
	7m - 10m			.020±.008 (0.50±0.20)	

Size Code	Resistance	Dimensions inches (mm)			
		L	W	d	t
TLR3A	1mΩ	.25±.01 (6.35±0.25)	.125±.01 (3.18±0.25)	.087±.01 (2.20±0.25)	.024±.01 (0.62±0.25)
	2mΩ			.047±.01 (1.20±0.25)	
	3mΩ			.073±.01 (1.85±0.25)	
	4mΩ			.047±.01 (1.20±0.25)	
TLR3AW	0.5mΩ	.25±.01 (6.35±0.25)	.125±.01 (3.18±0.25)	.107±.01 (2.725±0.25)	.024±.01 (0.60±0.25)
	0.68mΩ, 0.75mΩ, 0.82mΩ			.105±.01 (2.675±0.25)	
	1mΩ, 1.5mΩ, 2mΩ, 3mΩ, 4mΩ			.087±.01 (2.20±0.25)	
	5mΩ, 6mΩ, 7mΩ, 8mΩ			.047±.01 (1.20±0.25)	
	9mΩ, 10mΩ			.030±.01 (0.77±0.25)	

### ordering information

TLR	3A	D	TE	2L00	F	75
Type	Power Rating	Termination Material	Packaging	Nominal Resistance	Tolerance	T.C.R.
	2B: 0.5W 2H: 1W 3A: 1W 3AW: 2W	D: SnAgCu	TE: 7" 8mm pitch embossed plastic (3A, 3AW) TE: 7" 4mm pitch embossed plastic (2H only) TD: 7" 4mm pitch punched paper (2B only)	±1%: 4 digits All values less than 0.1Ω (100m) are expressed in mW with "L" as decimal Ex: 2mΩ = 2L00	F: ±1%	<b>New 50:</b> 50ppm/°C 75ppm/°C Blank: 150ppm/°C Blank: 200ppm/°C

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18

### applications and ratings

current sense

Part Designation	Power Rating	Rated Ambient Temperature	Rated Terminal Part Temperature	T.C.R. (ppm/°C) Max.*	Standard Resistance (Ω)	Resistance Tolerance	Operating Temperature Range
TLR2B	1/2W (.5W)	70°C	105°C	±50	2m,3m,4m,5m,6m,7m,8m,9m,10m,11m,12m,13m,15m,16m,18m,20m	F: ±1%	-65°C to +155°C** -65°C to +170°C**
				±75	1m,1.5m,2m,3m,4m,5m,6m,7m,8m,9m,10m,11m,12m,13m,15m,16m,18m,20m		
TLR2H	1W	70°C	105°C	±50	1m,2m,3m,4m,5m,6m,7m,8m,9m,10m	F: ±1%	-65°C to +155°C** -65°C to +170°C**
				±75			
TLR3A	1W	70°C	105°C	±150	1m, 2m	F: ±1%	-65°C to +170°C
				±200	3m, 4m		
TLR3AW	2W	70°C	105°C	±50	2m,3m,4m,5m,6m,7m,8m,9m,10m	F: ±1%	-65°C to +155°C
				±75	0.5m,0.68m,0.75m,0.82m,1m,1.5m,2m*,3m,4m,		
				±150	5m,6m,7m,8m,9m,10m		


\* Contact factory for 2mΩ dimensions

\*\* Please reference High Temperature Performance Characteristics in the below table


If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

### environmental applications

#### Derating Curve

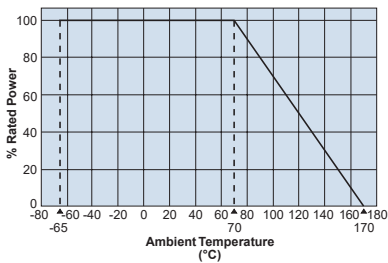




For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

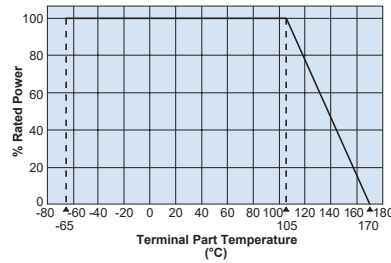

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

#### Temperature Rise



Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions.

### Performance Characteristics

Parameter	Requirement Δ R ±%		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Resistance to Solder Heat	±0.5%	±0.3%	260°C ± 5°C, 10 seconds +2/-0 seconds
Rapid Change of Temperature	±0.5%	±0.4%	-55°C (15 minutes), +150°C (15 minutes), 1000 cycles
Moisture Resistance	±0.5%	±0.1%	MIL-STD-202, Method 106, 0% power, 7a and 7b not required
Biased Humidity	±0.5%	±0.1%	85°C ± 2°C, 85% RH, 1000 hours, 10% bias
Endurance (Ambient Temp.)	±1.0%	±0.3%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure**	±1.0%	±0.6%	±155°C (2B, 2H, 3AW), ±170°C (3A), 1000 hours
	±2.0%	—	±170°C (2B, 2H, 3AW), 1000 hours


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

8/16/18

### features

- Ultra-low TCR (+50ppm/°C) available
- Metal alloy: superior corrosion and heat resistance
- Applications include current sensing, voltage division and pulse applications
- Ultra low resistance (0.5mΩ - 20mΩ)
- Suitable for reflow soldering (Not suitable for flow soldering)
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- AEC-Q200 Qualified

### dimensions and construction

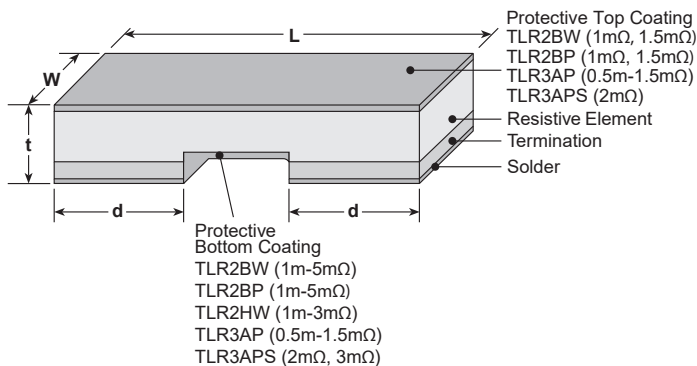

Size Code	Resistance	Dimensions inches (mm)			
		L	W	d	t
TLR3AP	0.5mΩ	.25±.01 (6.35±0.25)	.125±.01 (3.18±0.25)	.107±.01 (2.725±0.25)	.024±.01 (0.62±0.25)
	0.68mΩ, 0.75mΩ, 0.82mΩ			.105±.01 (2.675±0.25)	
	1mΩ, 1.5mΩ, 3mΩ, 4mΩ			.087±.01 (2.20±0.25)	
	2mΩ			.098±.01 (2.50±0.25)	
	5mΩ, 6mΩ, 7mΩ, 8mΩ			.047±.01 (1.20±0.25)	
	9mΩ, 10mΩ			.030±.01 (0.77±0.25)	
TLR3APS	2mΩ, 3mΩ	.25±.01 (6.35±0.25)	.125±.01 (3.18±0.25)	.047±.01 (1.20±0.25)	.024±.01 (0.60±0.25)

Size Code	Resistance	Dimensions inches (mm)			
		L	W	d	t
TLR2BW	New 0.5mΩ	.126±.008 (3.20±0.20)	.063±.008 (1.60±0.20)	.049±.008 (1.25±0.20)	.028±.008 (0.70±0.20)
	1mΩ			.043±.008 (1.10±0.20)	.024±.008 (0.60±0.20)
	New 1.5mΩ			.020±.008 (0.50±0.20)	
	2mΩ - 20mΩ				
TLR2BP	New 0.5mΩ	.126±.008 (3.20±0.20)	.063±.008 (1.60±0.20)	.049±.008 (1.25±0.20)	.028±.008 (0.70±0.20)
	1mΩ, 1.5mΩ			.043±.008 (1.10±0.20)	.024±.008 (0.60±0.20)
	2mΩ - 20mΩ			.020±.008 (0.50±0.20)	
TLR2HW	New 0.5mΩ	.200±.008 (5.00±0.20)	.100±.008 (2.50±0.20)	.075±.008 (1.90±0.20)	.028±.008 (0.70±0.20)
	1mΩ			.071±.008 (1.80±0.20)	.026±.008 (0.65±0.20)
	2mΩ - 6mΩ			.060±.008 (1.50±0.20)	.024±.008 (0.60±0.20)
	7mΩ - 10mΩ			.020±.008 (0.50±0.20)	

### ordering information

<b>TLR</b>	<b>2BW</b>	<b>D</b>	<b>TD</b>	<b>10L0</b>	<b>F</b>	<b>75</b>
Type	Power Rating	Termination Material	Packaging	Nominal Resistance	Tolerance	T.C.R.
	2BW: 1W 2BP: 1.5W 2HW: 2W 3AP: 3W 3APS: 3W	D: SnAgCu	TD: 7" 4mm pitch punched paper TE: 7" 4mm embossed plastic	±1%: 4 digits All values less than 0.1Ω (100m) are expressed in mW with "L" as decimal Ex: 2mΩ = 2L00	F: ±1%	50: 50ppm/°C 75: 75ppm/°C

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/26/18



### applications and ratings

current sense



Part Designation	Power Rating	T.C.R. (ppm/°C) Max.**	Standard Resistance (Ω)	Resistance Tolerance	Rated Terminal Part Temperature	Operating Temperature Range
TLR2BW	1W	±50	2m,3m,4m,5m,6m,7m,8m,9m,10m,11m,12m,13m,15m,16m,18m,20m	F: ±1%	+120°C and less	-65°C to +170°C
		±75	0.5m,1m,1.5m,2m,3m,4m,5m,6m,7m,8m,9m,10m,11m,12m,13m,15m,16m,18m,20m			
TLR2BP	1.5W	±50	2m,3m,4m,5m,6m,7m,8m,9m,10m	F: ±1%	+110°C and less	-65°C to +170°C
			11m,12m,13m,15m,16m,18m,20m		+100°C and less	
		±75	0.5m,1m,1.5m,2m,3m,4m,5m,6m,7m,8m,9m,10m		+110°C and less	
			11m,12m,13m,15m,16m,18m,20m		+100°C and less	
TLR2HW	2W	±50	0.5m,1m,2m,2.5m,3m,4m,5m,6m,7m,8m,9m,10m	F: ±1%	+120°C and less	-65°C to +170°C
		±75	0.5m,1m,2m,2.5m,3m,4m,5m,6m,7m,8m,9m,10m			
TLR3AP	3W	±50	2m,3m,4m,5m,6m,7m,8m,9m,10m	F: ±1%	0.5m ~ 8m: +110°C and less	-65°C to +170°C
		±75	0.5m,0.68m,0.75m,0.82m,1m,1.5m,2m,3m,4m,5m,6m,7m,8m,9m,10m		9m, 10m: +90°C and less	
TLR3APS	3W	±50, ±75	2m,3m	F: ±1%	+110°C and less	-65°C to +170°C

### environmental applications

#### Derating Curve

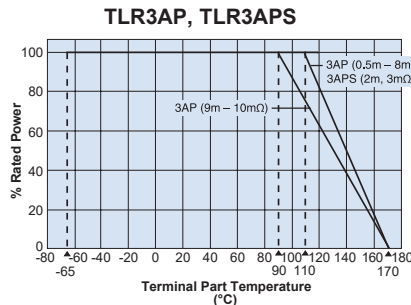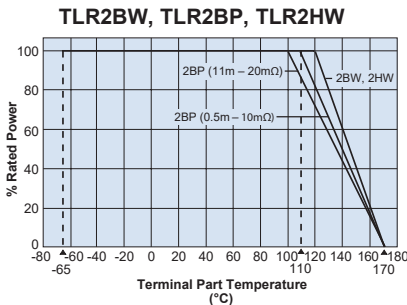


#### Temperature Rise



For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based in the terminal part temperature" in the beginning of our catalog before use.

Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions.



### Performance Characteristics


Parameter	Requirement Δ R ±%		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Resistance to Solder Heat	±0.5%	±0.3%	260°C ± 5°C, 10 ± 2 seconds
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (15 minutes), +150°C (15 minutes), 1000 cycles
Moisture Resistance	±0.5%	±0.1%	MIL-STD-202-106, 0% power, 7a and 7b not required
Biased Humidity	±0.5%	±0.1%	85°C ± 2°C, 85% RH, 1000 hours, 10% bias
Endurance of Rated Terminal Part Temperature	±1.0%	±0.3%	120°C ± 2°C (2BW, 2HW), 110°C ± 2°C (3AP 0.5mΩ~8mΩ) 90°C ± 2°C (3AP 9mΩ~10mΩ), 110°C±2°C (2BP 1mΩ-10mΩ) 100°C±2°C (2BP 11mΩ-20mΩ), 110°C±2°C (3APS 2mΩ, 3mΩ) 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1.0%	±0.6%	±155°C, 1000 hours
	±2.0%	±0.8%	±170°C, 1000 hours
	2BW: ±1.0%	—	±170°C ±3°C, 2000 hours




**features**

- SMD type of small size, metal plate low resistance resistor for current detection
- Low height suitable for use of small equipment such as mobile phone
- High reliability and performance with T.C.R  $\pm 100 \times 10^{-6}/K$
- Suitable for reflow soldering (Not suitable for flow soldering)
- Products meet EU RoHS requirements
- AEC-Q200 Qualified

current sense

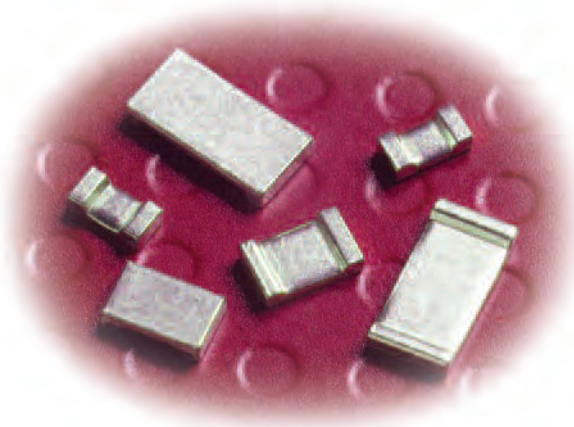

**dimensions and construction**

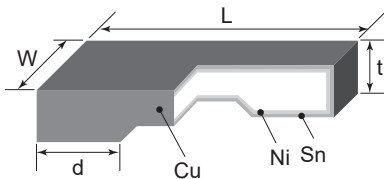

Size Code	Resistance	Dimensions inches (mm)			
		L	W	d	t
TLRZ1E (0402)	—	.039±.004 (1.00±0.10)	.020±.004 (0.50±0.10)	.008±.004 (0.20±0.10)	.016±.002 (0.40±0.005)
TLRZ1J (0603)	—	.063±.004 (1.60±0.10)	.031±.004 (0.80±0.10)	.012±.004 (0.30±0.10)	.020±.002 (0.5±0.05)
TLRZ2A (0805)	—	.079±.004 (2.00±0.10)	.049±.004 (1.25±0.10)	.012±.004 (0.30±0.10)	
TLRZ2B (1206)	—	.126±.004 (3.20±0.10)	.063±.004 (1.60±0.10)	.012±.004 (0.30±0.10)	

**ordering information**

<b>TLRZ</b>	<b>1E</b>	<b>T</b>	<b>TP</b>
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Packaging</b>
TLRZ	1E: 10A 1J: 26A 2A: 31.6A 2B: 50A	T: Sn	TB: 7" pitch pressed paper (TLRZ1E only) TD: 7" 4mm pitch punch paper

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


10/26/18

## applications and ratings

Part Designation	Current Rating	Standard Resistance ( $\Omega$ )	Rated Terminal Part Temperature	Operating Temperature Range
TLRZ1E	10A	0.5m max.	105°C and less	-55°C to +170°C
TLRZ1J	26A	0.2m max.	105°C and less	
TLRZ2A	31.6A	0.2m max.	105°C and less	
TLRZ2B	50A	0.2m max.	105°C and less	

## environmental applications

### Derating Curve

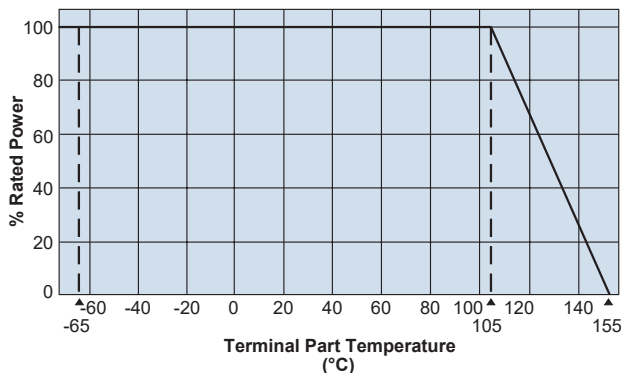

For resistors operated at an ambient temperature of 105°C or above, a power rating shall be derated in accordance with the above derating curve.

## Performance Characteristics

Parameter	Requirement $\Delta R$ %		Test Method
	Limit	Typical	
Resistance	1E: Max 0.5m $\Omega$ 1J/2A/2B: Max 0.2m $\Omega$	1E: Max 0.25m $\Omega$ 1J/2A/2B: Max 0.15m $\Omega$	25°C
Overload (Short time)			1E: 20A; 1J/2A: 40A; 2B: 80A for 5 seconds
Resistance to Solder Heat			260°C $\pm$ 5°C, 10 ~ 12 seconds
Rapid Change of Temperature			-55°C (30 minutes), +155°C (30 minutes), 1000 cycles
Moisture Resistance			85°C, 85%RH, 1E: 1A; 1J/2A: 2A; 2B: 4A, 1000 hours
Endurance of Rated Terminal Part Temperature			Terminal part temperature: 105°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Low Temperature Exposure			-55°C, 1000 hours
High Temperature Exposure			155°C, 1000 hours

Note: Please contact factory for the TLRZ Performance Characteristics

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


10/26/18

**features**

- SMD Type of small size, low resistance resistor for current detection
- Carrier metal plate inside, resistor of high radiation of heat structure (3AW, 3AP)
- High reliability and performance with low T.C.R.
- Automatic mounting machines are applicable
- Suitable for reflow soldering (Not suitable for flow soldering)
- Products with lead-free terminations meet EU RoHS requirements
- AEC-Q200 Qualified

current sense

**dimensions and construction**

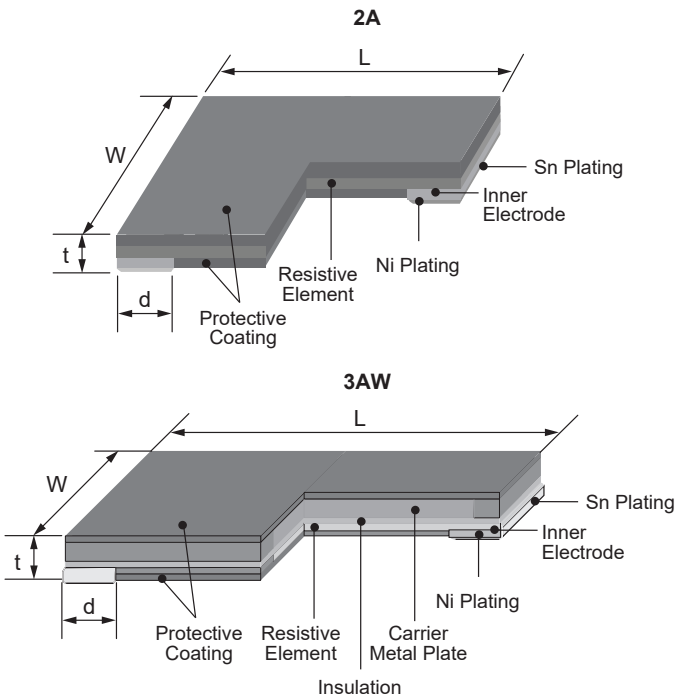

Size Code (Inch)	Resistance (Ω)	Dimensions inches (mm)			
		L	W	d	t
TLRH 2A (0805)	10m~100m	.079±.008 (2.00±0.20)	.049±.008 (1.25±0.20)	.014±.008 (0.35±0.20)	.010±.008 (0.25±0.20)
	TLRH 3AW (2512)	10m~270m	.248±.008 (6.30±0.20)	.126±.008 (3.20±0.20)	.030±.008 (0.75±0.20)
TLRH 3AP (2512)	6m~39m	.248±.008 (6.30±0.20)	.126±.008 (3.20±0.20)	.071±.008 (1.8±0.20)	.020±.008 (0.50±0.20)
	40m~120m			.051±.008 (1.3±0.20)	

**ordering information**

<b>TLRH</b>	<b>3AW</b>	<b>T</b>	<b>TE</b>	<b>33L0</b>	<b>F</b>
Type	Power Rating	Terminal Surface Material	Packaging	Nominal Resistance	Tolerance
	2A (10~27mΩ): 0.5W (33~50mΩ): 0.33W (56~100mΩ): 0.25W 3AW: 2.0W 3AP: (6~39mΩ): 5.0W (40~120mΩ): 4.0W	T: Sn	2A: TD: 7" 4mm pitch punched paper 3AW, 3AP: TE: 7" punched plastic	±1%: 4 digits All values less than 0.1Ω (100m) are expressed in mW with "L" as decimal Ex: 2mΩ = 2L00 2A: No marking	F: ±1%

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


10/26/18

## applications and ratings

Part Designation	Power Rating	T.C.R. (x10 <sup>-6</sup> /K)	Resistance Range (Ω) F: ±1% (E12)	Tolerance	Rated Terminal Part Temperature	Operating Temperature Range
TLRH 2A	0.25W	±75	56m~100m	F: ±1%	+105°C	-65°C~+155°C
	0.33W		33m ~ 50m			
	0.50W		10m ~ 27m			
TLRH 3AW	2.0W	±75	10m~22m		85°C	-65°C~+170°C
		±50	24m~270m			
TLRH 3AP	4.0W	±50	40m, 47m, 50m, 56m~120m			
	5.0W	±50	18m, 20m, 22m, 25m~39m			
		±75	6m, 7m, 8m, 9m, 10m, 12m			

## environmental applications


### Derating Curve

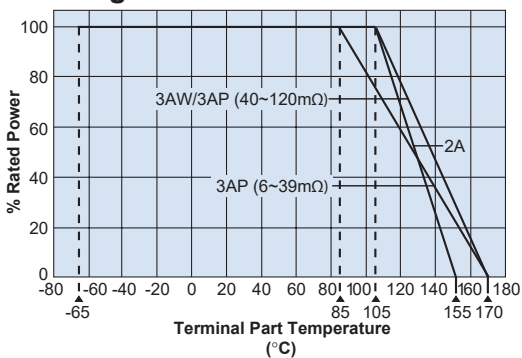

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### Temperature Rise

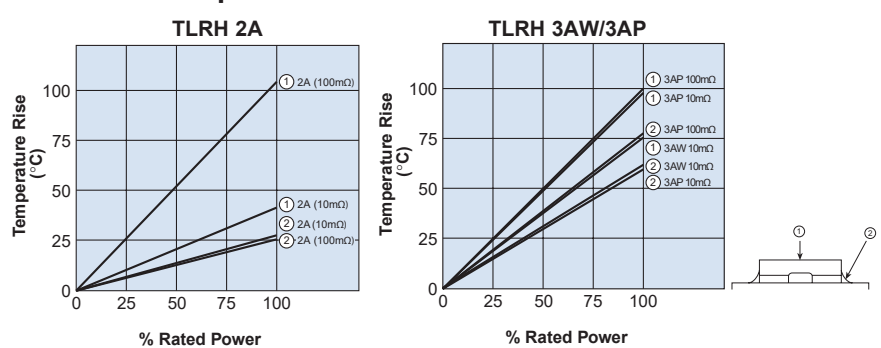


Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions. Please contact factory prior to use.

## Performance Characteristics

Parameter	Requirement Δ R%		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+100°C
Overload (Short time)	±0.5%	2A: ±0.05% 3AW,3AP: ±0.2%	2A, 3AW: Rated power x 2.5 for 5 seconds 3AP: Rated power x 8W for 5 seconds
Resistance to Soldering Heat	±0.5%	±0.1%	260°C ±5°C, 10 seconds ~ 12 seconds
Rapid Change of Temperature	±0.5%	2A: ±0.2% 3AW,3AP: ±0.1%	-55°C (15min.)/+150°C (15min.) 1000 cycles
Moisture Resistance	±0.5%	±0.1%	85°C ±2°C, 85% RH, 1000 hours, 10% Bias
Endurance at 105°C and Less of Terminal Part Temperature	±1%	2A: ±0.45% 3AW,3AP: ±0.3%	2A, 3AW, 3AP (40~120mΩ): 105°C, ±2°C; 3AP (6~39mΩ): 85°C ±2°C 1000 hours, 1.5 hours ON/0.5 hour OFF cycle
Low Temperature Exposure	±0.5%	2A: ±0.05% 3AW,3AP: ±0.02%	-65°C, 96 hours
High Temperature Exposure	±1%	2A: ±0.5% 3AW,3AP: ±0.2%	2A, 3AP: +155°C, 1000 hours (6~12mΩ) 3AW, 3AP: +170°C±3°C, 1000 hours (18~120mΩ)
	±2%	3AP: ±0.2%	3AP: +170°C±3°C, 1000 hours (6~12mΩ)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


0/26/18

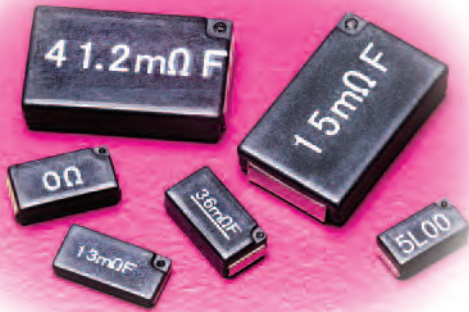

### features

- Surface mount type
- Flameproof UL94V0 molded polymer case
- Excellent dimension accuracy, mountability and shock resistance
- Low profile type available (TSL)
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

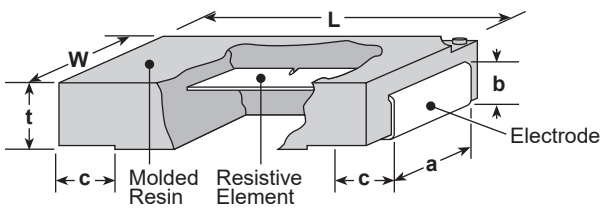

Size Code	Dimensions inches (mm)					
	L	W	t	a	b	c
<b>SL07 (2010)</b>	.197±.012 (5.0±0.3)	.098±.008 (2.5±0.2)	.067±.008 (1.7±0.2)	.079±.008 (2.0±0.2)	.047±.008 (0.9±0.2)	.035±.012 (1.2±0.3)
<b>TSL1 (2512)</b>	.248±.012 (6.3±0.3)	.122±.008 (3.1±0.2)	.039±.008 (1.0±0.2)	.094±.008 (2.4±0.2)	.028±.008 (0.7±0.2)	.047±.012 (1.2±0.3)
<b>SL1,SLZ1 (2512)</b>	.248±.012 (6.3±0.3)	.122±.008 (3.1±0.2)	.075±.008 (1.9±0.2)	.094±.008 (2.4±0.2)	.047±.008 (1.2±0.2)	.047±.012 (1.2±0.3)
<b>SL2 (4527)</b>	.453±.012 (11.5±0.3)	.276±.008 (7.0±0.2)	.098±.008 (2.5±0.2)	.197±.008 (5.0±0.2)	.067±.008 (1.7±0.2)	.102±.02 (2.6±0.5)
<b>SLN2 (4527)</b>	.453±.012 (11.5±0.3)	.276±.008 (7.0±0.2)	.094±.008 (2.4±0.2)	.217±.008 (5.5±0.2)	.063±.008 (1.6±0.2)	.100±.016 (2.55±0.4)
<b>SL3 (4527)</b>	.453±.012 (11.5±0.3)	.276±.008 (7.0±0.2)	.098±.008 (2.5±0.2)	.197±.008 (5.0±0.2)	.067±.008 (1.7±0.2)	.102±.02 (2.6±0.5)

### ordering information

SL	1	T	TE	10L0	F	75
Type	Power Rating	Termination Material	Packaging	Nominal Resistance	Tolerance	T.C.R. (x10 <sup>-4</sup> /K)
TSL SL SLN SLZ	07: 0.75W 1: 1W 2: 2W 3: 3W	T: Sn L: Sn/Pb*	TE: 7" embossed plastic TED: 10" embossed plastic For further information on packaging please refer to Appendix A	±0.5%, ±1%: 4 digits ±2%, ±5%: 3 digits All values less than 0.1Ω (100m) are expressed in mΩ with "L" as decimal Ex: 2mΩ = 2L00 0.1Ω: R100; 5mΩ: 5L0	D: ±0.5% F: ±1% G: ±2% J: ±5%	Nil: 0-150 0-200 ±75 (SLN2) ±100 ±110 ±180 50: ±50 (SL1) 75: ±75 (SL1)

\* SL07 and SLN2, only the symbol T is available as the terminal surface material



### applications and ratings

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temperature	Resistance Range ( $\Omega$ )*				T.C.R. (ppm/ $^{\circ}$ C) Max.	Operating Temp. Range
				D: $\pm 0.5\%$ E24, E96***	F: $\pm 1\%$ E24, E96***	G: $\pm 2\%$ E24	J: $\pm 5\%$ E24		
SL07	0.75W	70 $^{\circ}$ C	125 $^{\circ}$ C	—	5m - 100m	—	5m - 100m	0~200: R<11m $\Omega$ 0~150: R=>11m $\Omega$	-55 $^{\circ}$ C to +180 $^{\circ}$ C
TSL1	1W		125 $^{\circ}$ C	10m - 100m	5m - 100m	—	5m - 100m	$\pm 180$ : R<15m $\Omega$ $\pm 100$ : R=>15m $\Omega$	
SL1	1W		125 $^{\circ}$ C	10m - 102m	5m - 102m	3m, 4m	5m - 100m	$\pm 180$ : R<15m $\Omega$ $\pm 100$ : R=>15m $\Omega$	
SL1 (TCR $\pm 50$ ppm)	1W		125 $^{\circ}$ C	34.8m - 200m	34.8m - 200m	—	36m - 200m	$\pm 50$ ppm	
SL1 (TCR $\pm 75$ ppm)	1W		125 $^{\circ}$ C	20m - 200m	20m - 200m	—	20m - 200m	$\pm 75$ ppm	
SL2	2W		125 $^{\circ}$ C	10m ~ 360m	5m ~ 360m	3m, 4m	3m ~ 360m	$\pm 180$ : R<11m $\Omega$ $\pm 100$ : R=>11m $\Omega$	
SLN2	2W		120 $^{\circ}$ C	5m - 200m	5m - 200m	—	5m - 200m	$\pm 110$ : R<10m $\Omega$ $\pm 75$ : R=>10m $\Omega$	
SL3	3W		125 $^{\circ}$ C: R $\leq$ 100m $\Omega$ 90 $^{\circ}$ C: R $\geq$ 110m $\Omega$	10m $\Omega$ - 100m $\Omega$	5m $\Omega$ - 100m $\Omega$	—	5m $\Omega$ - 100m $\Omega$	$\pm 180$ : R<10m $\Omega$ $\pm 100$ : R=>11m $\Omega$	
SLZ1**	—		—	—	0.5m $\Omega$ Max.	0.5m $\Omega$ Max.	0.5m $\Omega$ Max.	0.5m $\Omega$ Max.	

\* 3m, 4m, 5m, 6m, 7m, 8m, 9m also available inside each resistance range


\*\* SLZ1: Current rating: 44A

\*\*\* SL07 and SL1 (T.C.R.:  $\pm 50/\pm 75$  ppm, 102m $\Omega$ =<R=<200m $\Omega$ ) offer only E24 series


If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

### environmental applications

#### Derating Curve

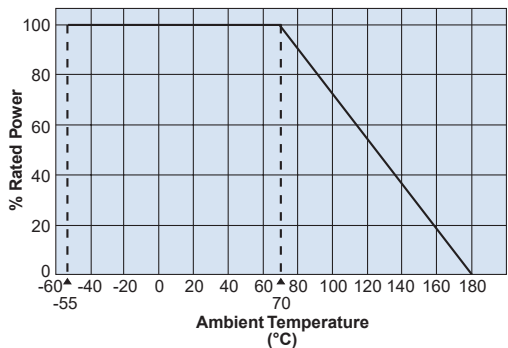


For resistors operated at an ambient temperature of 70 $^{\circ}$ C or above, a power rating shall be derated in accordance with the above derating curve.

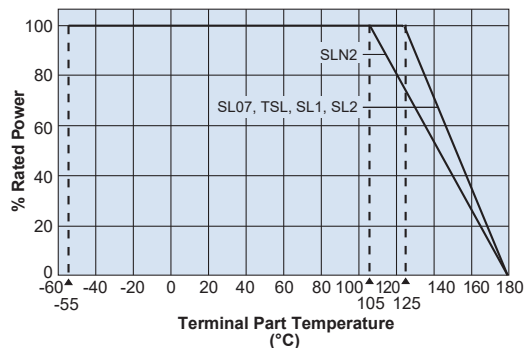

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### Surface Temperature Rise

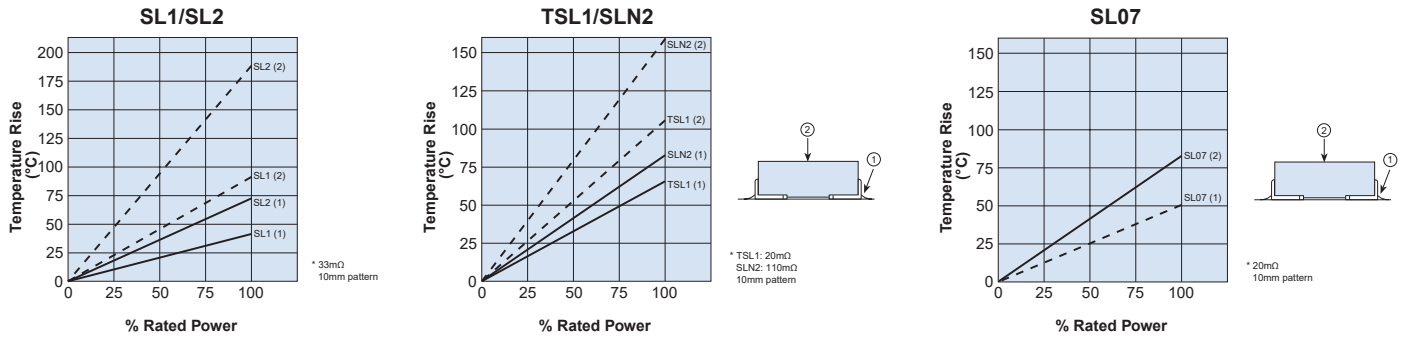

Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions.

### Performance Characteristics


Parameter	Requirement $\Delta R \pm\%$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Overload (Short time)	$\pm 1\%$ : SLO7, TSL1, SL1, SL2, SL3 $\pm 0.5\%$ : SLN2	$\pm 1\%$ : SLO7, TSL1, SL1, SL2, SL3 $\pm 0.25\%$ : SLN2	SLO7: Rated power x 4 for 5 seconds, TSL1: Rated power x 2.5 for 5 seconds, SL1, SL2, SLN2, SL3: Rated power x 5 for 5 seconds, SL1 (T.C.R.: +50/+75): Rated power x4 for 5 seconds
Resistance to Solder Heat	$\pm 1\%$ : SLO7, TSL1, SL1, SL2, SL3	$\pm 1\%$ : SLO7, TSL1, SL1, SL2, SL3	260°C $\pm$ 5°C, 10 $\pm$ 1 second
	$\pm 0.5\%$ : SLN2	$\pm 0.5\%$ : SLN2	260°C $\pm$ 5°C, 10~12 seconds
Rapid Change of Temperature	$\pm 1\%$ : SLO7, TSL1, SL1, SL2, SL3	$\pm 0.5\%$ : SLO7, TSL1, SL1, SL2, SL3	-55°C (30 minutes), +150°C (30 minutes), 100 cycles
	$\pm 0.5\%$ : SLN2	$\pm 0.25\%$ : SLN2	-55°C (15 minutes), +150°C (15 minutes), 1000 cycles
Moisture Resistance	$\pm 2\%$ : SLO7, TSL1, SL1, SL2, SL3	$\pm 0.5\%$ : SLO7, TSL1, SL1, SL2, SL3	40°C $\pm$ 2°C, 90%~95%RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
	$\pm 0.5\%$ : SLN2	$\pm 0.25\%$ : SLN2	85°C $\pm$ 2°C, 85% $\pm$ 3%RH, 1000 hours, Rated power x 0.1
Endurance at 70°C	$\pm 2\%$ : SLO7, TSL1, SL1, SL2, SL3 $\pm 1\%$ : SLN2	$\pm 1\%$	70°C $\pm$ 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Low Temperature Exposure	$\pm 0.5\%$	$\pm 0.25\%$	SLO7, TSL1, SL1, SL2, SL3: -55°C, 1 hour; SLN2: -65°C, 24 hours



### features


- Surface mount type
- Flameproof UL94V0 molded polymer case
- Excellent dimension accuracy, mountability and shock resistance
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

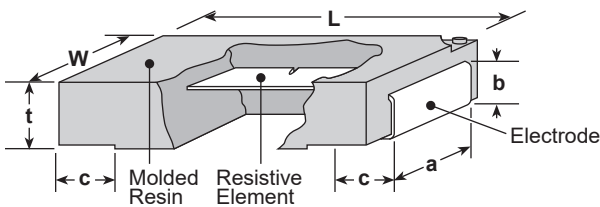


Size Code	Dimensions inches (mm)					
	L	W	t	a	b	c
<b>SL1 (2512)</b>	.248±.012 (6.3±0.3)	.122±.008 (3.1±0.2)	.075±.008 (1.9±0.2)	.094±.008 (2.4±0.2)	.047±.008 (1.2±0.2)	.047±.012 (1.2±0.3)
<b>SL2 (4527)</b>	.453±.012 (11.5±0.3)	.276±.008 (7.0±0.2)	.098±.008 (2.5±0.2)	.197±.008 (5.0±0.2)	.067±.008 (1.7±0.2)	.102±.02 (2.6±0.5)

### Derating Curve

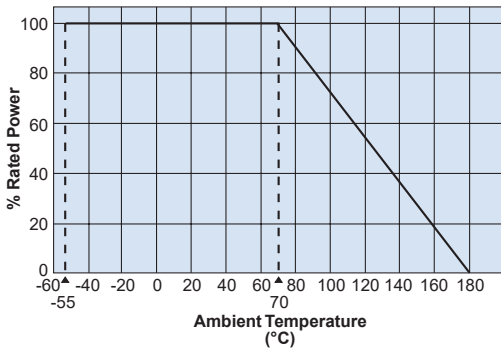

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

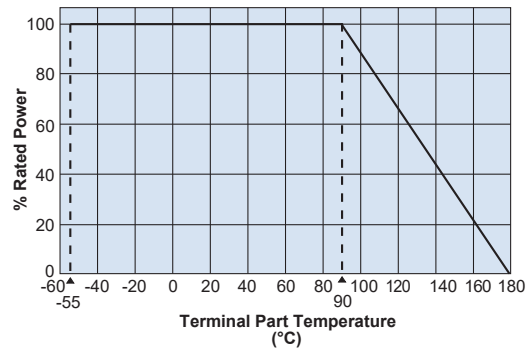

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### ordering information

<b>SL</b>	<b>1</b>	<b>T</b>	<b>TE</b>	<b>10L0</b>	<b>F</b>
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
SL	1: 1W 2: 2W	T: Sn	TE: 7" embossed plastic TED: 10" embossed plastic For further information on packaging please refer to Appendix A	±0.5%, ±1%: 4 digits ±2%, ±5%: 3 digits All values less than 0.1Ω (100m) are expressed in mΩ with "L" as decimal Ex: 2mΩ = 2L00 0.1Ω: R100; 5mΩ: 5L0	D: ±0.5% F: ±1% J: ±5%

### applications and ratings


Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temperature	Resistance Range ( $\Omega$ )*			T.C.R. (ppm/ $^{\circ}$ C) Max.	Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temp. Range
				D: $\pm 0.5\%$ E24, E96***	F: $\pm 1\%$ E24, E96***	J: $\pm 5\%$ E24				
SL1	1W	70 $^{\circ}$ C	90 $^{\circ}$ C	105m - 1M	105m - 1M	110m - 22M	$\pm 100$	200V	400V	-55 $^{\circ}$ C to +180 $^{\circ}$ C
SL2	2W		90 $^{\circ}$ C	365m ~ 1M	365m ~ 1M	390m ~ 22M	$\pm 100$	500V	1000V	

Rated voltage =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$  or Max. working voltage, whichever is lower

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

### environmental applications


#### Surface Temperature Rise

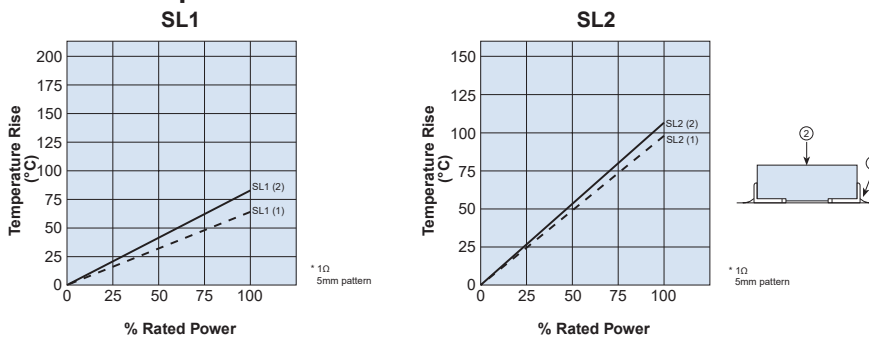

Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions.

### Performance Characteristics


Parameter	Requirement $\Delta R \pm\%$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25 $^{\circ}$ C
T.C.R.	Within specified T.C.R.	—	+25 $^{\circ}$ C/+125 $^{\circ}$ C
Overload (Short time)	$\pm 1\%$	$\pm 1\%$	Rated power x 5 for 5 seconds
Resistance to Solder Heat	$\pm 1\%$	$\pm 1\%$	260 $^{\circ}$ C $\pm 5^{\circ}$ C, 10 $\pm 1$ second
Rapid Change of Temperature	$\pm 1\%$	$\pm 1\%$	-55 $^{\circ}$ C (30 minutes), +150 $^{\circ}$ C (30 minutes), 100 cycles
Moisture Resistance	$\pm 2\%$	$\pm 0.5\%$	40 $^{\circ}$ C $\pm 2^{\circ}$ C, 90%~95%RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70 $^{\circ}$ C	$\pm 2\%$	$\pm 0.5\%$	70 $^{\circ}$ C $\pm 2^{\circ}$ C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Low Temperature Exposure	$\pm 0.5\%$	$\pm 0.25\%$	-55 $^{\circ}$ C, 1 hour

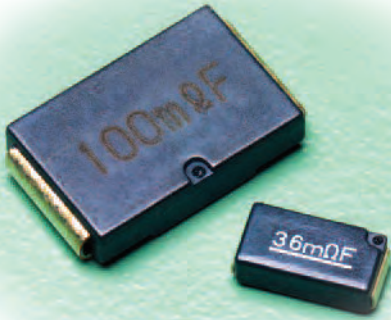

### features

- Surface mount type
- Flameproof UL94V0 molded polymer case
- Excellent dimension accuracy, mountability and shock resistance
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

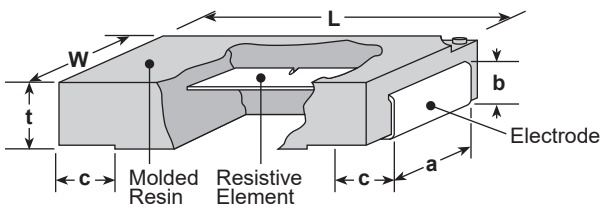

Size Code	Dimensions inches (mm)					
	L	W	t	a	b	c
<b>SLW07 (2010)</b>	.197±.012 (5.0±0.3)	.098±.008 (2.5±0.2)	.067±.008 (1.7±0.2)	.079±.008 (2.0±0.2)	.047±.008 (0.9±0.2)	.035±.012 (1.2±0.3)
<b>SLW1 (2512)</b>	.248±.012 (6.3±0.3)	.122±.008 (3.1±0.2)	.075±.008 (1.9±0.2)	.094±.008 (2.4±0.2)	.047±.008 (1.2±0.2)	.047±.012 (1.2±0.3)
<b>SLN3 (4527)</b>	.453±.012 (11.5±0.3)	.276±.008 (7.0±0.2)	.094±.008 (2.4±0.2)	.217±.008 (5.5±0.2)	.063±.008 (1.6±0.2)	.100±.016 (2.55±0.4)
<b>SLN5 (4527)</b>	.453±.012 (11.5±0.3)	.276±.008 (7.0±0.2)	.098±.008 (2.5±0.2)	.217±.008 (5.5±0.2)	.075±.008 (1.9±0.2)	.100±.016 (2.55±0.4)

### ordering information

SL	1	T	TE	10L0	F	75
<b>Type</b>	<b>Size &amp; Power Ratings</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>	<b>T.C.R. (x10<sup>-4</sup>/K)</b>
SL SLN	W07: 1W W1: 1.5W 3: 3W 5: 7W	T: Sn	TE: Embossed plastic TED: 10" embossed plastic (SLN5 only) For further information on packaging please refer to Appendix A	±0.5%, ±1%: 4 digits ±5%: 3 digits All values less than 0.1Ω (100m) are expressed in mΩ with "L" as decimal Ex: 2mΩ = 2L00	D: ±0.5% F: ±1% J: ±5%	Nil: 0-150 0-200 ±75 (SLN3/SLN5) ±100 ±110 ±180 50: ±50 (SLW1) 75: ±75 (SLW1)

### applications and ratings

Part Designation	Power Rating	Resistance Range (Ω)*			T.C.R. (ppm/°C) Max.	Rated Terminal Part Temperature	Operating Temperature Range
		D: ±0.5% E24, E96***	F: ±1% E24, E96***	J: ±5% E24			
SLW07	1W	—	5m - 100m		0~200: R=<10mΩ 0~150: R=>11mΩ	125°C	-55°C to +180°C
SLW1	1.5W	10m - 100m	5m - 100m		±180: R=<13mΩ ±100: R=>15mΩ ±75: 20m=<R=<100mΩ ±50: 34.8m=<R=<100mΩ	120°C	
SLN3	3W	5m - 110m			±110: R<10mΩ ±75: R=>10mΩ	70°C (120°C)**	
SLN5	7W (5W)**	3m - 200m	—		±110: R<10mΩ ±75: R=>10mΩ		

\* 5m, 6m, 7m, 8m, 9mΩ also available inside resistance range


\*\* In case the rated terminal part temperature of 120°C, the rated power shall be 5W

\*\*\* SLW07 offers only E24 series




### environmental applications

#### Derating Curve

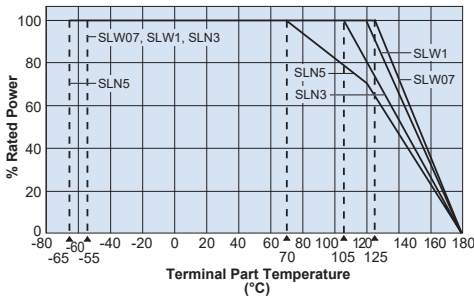


For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

#### Temperature Rise

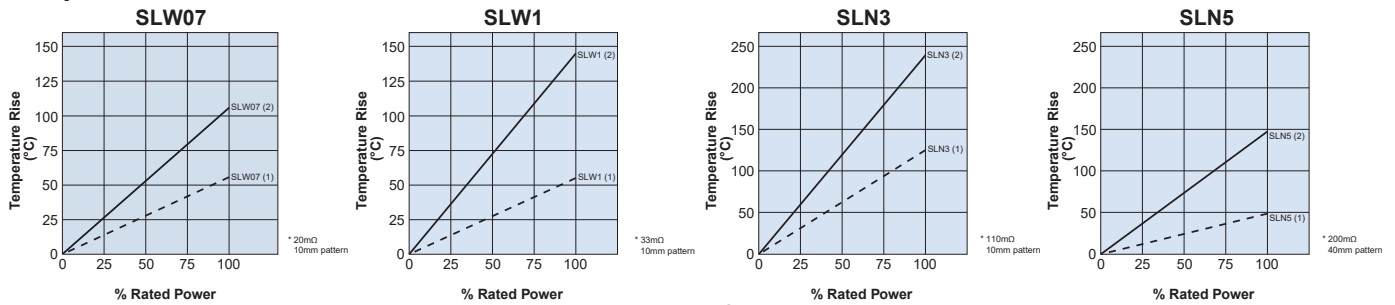

Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions.



#### Performance Characteristics

Parameter	Requirement $\Delta R \pm\%$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Overload (Short time)	$\pm 1\%$ : SLW07,SLW1 $\pm 0.5\%$ : SLN3 $\pm 2\%$ : SLN5	$\pm 1\%$ : SLW07,SLW1 $\pm 0.25\%$ : SLN3 $\pm 0.5\%$ : SLN5	SLW07: Rated power x 3 for 5 seconds, SLW1: Rated power x 5 for 5 seconds, SLN3: Rated power x 10 for 5 seconds, SLN5: Rated power x 15 for 5 seconds
Resistance to Solder Heat	$\pm 1\%$ : SLW07, SLW1	$\pm 1\%$ : SLW07, SLW1	260°C $\pm$ 5°C, 10 $\pm$ 1 second
	$\pm 0.5\%$ : SLN3,SLN5	$\pm 0.5\%$ : SLN3,SLN5	260°C $\pm$ 5°C, 10~12 seconds
Rapid Change of Temperature	$\pm 1\%$ : SLW07, SLW1	$\pm 0.5\%$ : SLW07, SLW1	-55°C (30 minutes), +150°C (30 minutes), 100 cycles
	$\pm 0.5\%$ : SLN3,SLN5	$\pm 0.3\%$ : SLN3,SLN5	-55°C (15 minutes), +150°C (15 minutes), 1000 cycles
Moisture Resistance	$\pm 2\%$ : SLW07, SLW1	$\pm 1\%$ : SLW07, SLW1	40°C $\pm$ 2°C, 90%~95%RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
	$\pm 0.5\%$ : SLN3,SLN5	$\pm 0.35\%$ : SLN3,SLN5	SLN3: 85°C $\pm$ 2°C, 85% RH, 1000 hours, 0.3W SLN5: 85°C $\pm$ 2°C, 85% RH, 1000 hours, 0.7W
Endurance of Rated Terminal Part Temperature	$\pm 2\%$	$\pm 1\%$ $\pm 1.2\%$ : SLN5	Terminal part temperature: 125°C (SLW07), 120 °C (SLW1, SLN3, SLN5: 5W), 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle, 70°C (SLN5: 7W)
Low Temperature Exposure	$\pm 0.5\%$	$\pm 0.25\%$	SLW07, SLW1: -55°C, 1 hour; SLN3, SLN5: -65°C, 24 hours


current sense



**features**


- Wide-side termination (reverse-geometry) type flat chip resistor
- High reliability and performance with T.C.R.  $\pm 100 \times 10^{-6}/K$ , resistance tolerance  $\pm 1\%$
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

**dimensions and construction**

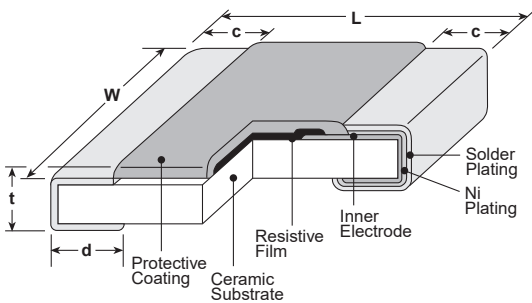


Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>NEW</b> 2A (0508)	.063±.006 (1.25±0.15)	.079±.006 (2.0±0.15)	.012±.008 (0.3±0.2)	.014±.008 (0.35±0.2)	.022±.004 (0.55±0.1)
2B (0612)	.063±.006 (1.6±0.15)	.126±.008 (3.2±0.2)	.012±.008 (0.3±0.2)	.018±.006 (0.45±0.15)	.024±.004 (0.6±0.1)
2H (1020)	.098±.006 (2.5±0.15)	.197±.006 (5.0±0.15)	.016±.008 (0.4±0.2)		
2J (1218)	.122±.006 (3.1±0.15)	.181±.006 (4.6±0.15)	.016±.008 (0.4±0.2)		
3A (1225)	.122±.006 (3.1±0.15)	.252±.006 (6.3±0.15)	.018±.008 (0.45±0.2)		

**Derating Curve**

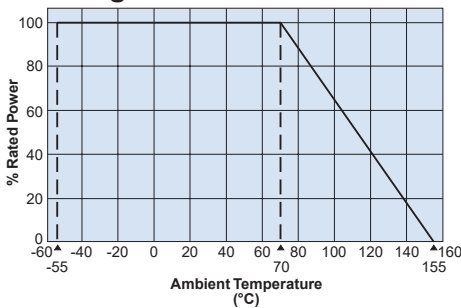


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

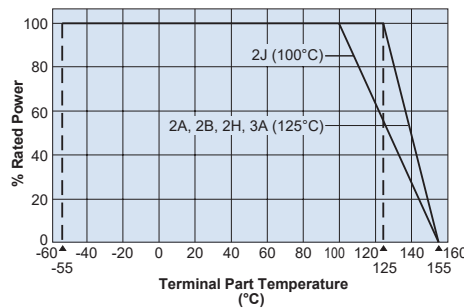

For resistors operated terminal temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve above.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

If you want to use at rated power (\*1), use derating curves based on the terminal part temperature on the right side graph.

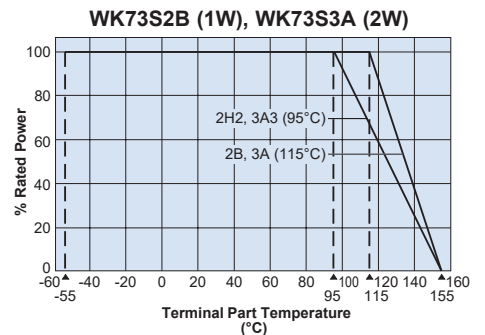

**ordering information**

<b>WK73S</b>	<b>2J</b>	<b>T</b>	<b>TE</b>	<b>33L0</b>	<b>F</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
WK73S	New 2A: 1W 2B: 0.75W, 1W 2H: 1W 2J: 1W 3A: 1.5W, 2W	T: Sn	TD: 0508, 0612: 7" 4mm pitch punched paper TE: 1020, 1218, 1225: 7" embossed plastic TED: 1020, 1218, 1225: 10" embossed plastic For further information on packaging, please refer to Appendix A	±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on values <10Ω All values less than 0.1Ω (100mΩ) are expressed in mΩ with "L" as decimal. Ex: 33mΩ, 1% = 33L0	D: ±0.5% F: ±1% J: ±5%

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18

**applications and ratings**

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range (Ω)			Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range
					D±0.5% E-24/E-96	F±1% E-24/E-96	J±5% E-24			
WK73S2A	1.0W <sup>1</sup>	—	125°C	±100	—	1 - 9.76	1 - 9.1	200V	400V	-55°C to +155°C
				0~+200	—	100m - 976m	100m - 910m			
WK73S2B	0.75W	70°C	125°C	±800	—	—	10m - 27m	200V	400V	
				±200	—	30m - 422m	30m - 390m			
	±100	430m - 9.76	430m - 9.76	430m - 9.1						
	±800	—	—	10m - 27m						
WK73S2B	1.0W <sup>1</sup>	—	115°C	±200	—	30m - 422m	30m - 390m	200V	400V	
				±100	430m - 9.76	430m - 9.76	430m - 9.1			
WK73S2H	1.0W	70°C	125°C	±800	—	—	10m - 24m	200V	400V	
				±200	—	27m - 215m	27m - 200m			
				±100	—	220m - 9.76	220m - 9.1			
WK73S2J	1.0W	70°C	100°C	±800	—	—	10m - 30m	200V	400V	
				±200	—	33m - 237m	33m - 220m			
				±100	—	240m - 9.76	240m - 9.1			
WK73S3A	1.5W	70°C	125°C	±800	—	—	10m - 20m	200V	400V	
				±300	—	22m - 32.4m	22m - 30m			
				±200	—	33m - 357m	33m - 330m			
	±100	—	360m - 9.76	360m - 9.1						
	WK73S3A	2.0W <sup>1</sup>	—	115°C	±800	—	—			10m - 20m
					±300	—	22m - 32.4m			22m - 30m
±200					—	33m - 357m	33m - 330m			
				±100	—	360m - 9.76	360m - 9.1			


current sense

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

<sup>1</sup> If you want to use at rated power use derating curves based on the terminal part temperature on the right side graph located on previous page.

If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature", please give priority to the "Rated Terminal Part Temperature." For more details refer to the "Introduction of the derating curves based on the terminal part temperature" in the beginning of the catalog

**Device Temperature Data**

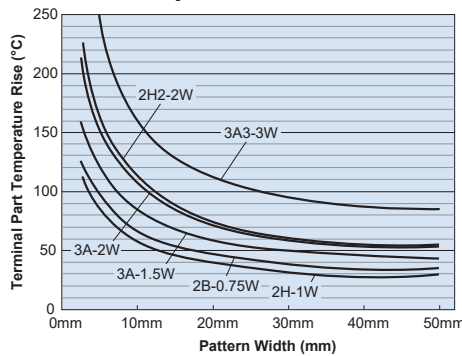

Room Temperature 25°C PCB: FR-4 t=1.6mm Cu foil thickness=35μm  
While using under high power, the temperature of the product may increase depending on the condition of heat dissipation from PCB. Be sure to check the terminal part temperature as well as precautions for use on delivery specifications before use.

**environmental applications**

**Performance Characteristics**

Parameter	Requirement Δ R ±(%+0.005Ω)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.2%	WK73S2A (1W), WK73S2B (1W), WK73S3A (2W): Rated voltage x2.0 for 5 seconds. WK73S2B, S2H, S2J, S3A: Rated voltage x2.5 for 3 seconds
Resistance to Solder Heat	±1%	±0.2%	260°C ± 5°C, 10 seconds ± 1 second
Bending Test	±1%	±0.1%	Holding point 90mm, Bending 1 time, Bending 5mm
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +155°C (30 minutes), 5 cycles
Moisture Resistance	±2%	±0.2%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.2%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±2%: WK73S (±5%) ±1%: all others	±0.5%: WK73S (±5%) ±0.2%: all others	+155°C, 1000 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

7/02/18


**NEW**



### features


- Wide-side termination (reverse-geometry) type flat chip resistor
- High reliability and performance with T.C.R.  $\pm 100 \times 10^{-6}/K$ , resistance tolerance  $\pm 1\%$
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

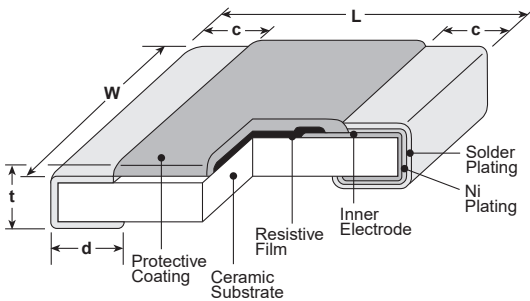

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>2B15</b> (0612)	.063±.006 (1.6±0.15)	.126±.008 (3.2±0.2)	.012±.008 (0.3±0.2)	.018±.006 (0.45±0.15)	.024±.004 (0.6±0.1)
<b>2H2</b> (1020)	.098±.006 (2.5±0.15)	.197±.006 (5.0±0.15)	.016±.008 (0.4±0.2)	.030±.006 (0.75±0.15)	
<b>3A3</b> (1225)	.122±.006 (3.1±0.15)	.252±.006 (6.3±0.15)	.018±.008 (0.45±0.2)		

### Derating Curve

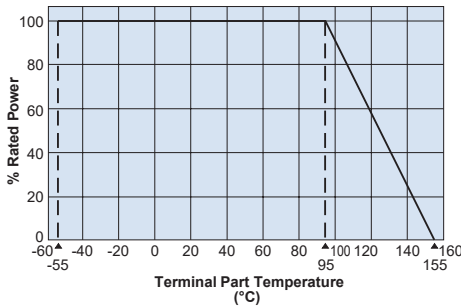

For resistors operated terminal temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve above. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### ordering information

WK73S	2H2	T	TE	33L0	F
Type	Size	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance
WK73S	2B15: 1.5W 2H2: 2W 3A3: 3W	T: Sn	TD: 0612: 7" 4mm pitch punched paper TE: 1020, 1225: 7" 4mm pitch embossed plastic For further information on packaging, please refer to Appendix A	±0.5%, ±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on values <10Ω All values less than 0.1Ω (100mΩ) are expressed in mΩ with "L" as decimal. Ex: 33mΩ, 1% = 33L0	D: ±0.5% F: ±1% J: ±5%


### applications and ratings

Part Designation	Power Rating	Rated Terminal Part Temp.	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range (Ω)			Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range
				D±0.5% E-24/E-96	F±1% E-24/E-96	J±5% E-24			
WK73S2B15	1.5W	95°C	±100	430m - 9.76	430m - 9.76	430m - 9.1	200V	400V	-55°C to +155°C
			±200	—	30m - 422m	30m - 390m			
			±800	—	—	10m - 27m			
WK73S2H2	2.0W <sup>1</sup>	95°C	±100	—	220m - 9.76	220m - 9.1	200V	400V	
			±200	—	27m - 215m	27m - 200m			
			±800	—	—	10m - 24m			
WK73S3A3	3.0W	95°C	±100	—	360m - 9.76	360m - 9.1	200V	400V	
			±200	—	33m - 357m	33m - 330m			
			±300	—	22m - 32.4m	22m - 30m			
			±800	—	—	10m - 20m			

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

### environmental applications

#### Device Temperature Data

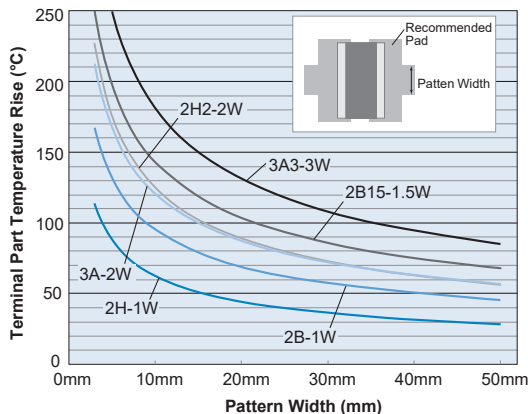

Room Temperature 25°C  
 PCB: FR-4 t=1.6mm Cu foil thickness=35μm  
 While using under high power, the temperature of the product may increase depending on the condition of heat dissipation from PCB.  
 Be sure to check the terminal part temperature as well as precautions for use on delivery specifications before use.

### Performance Characteristics

Parameter	Requirement Δ R ±(%+0.005Ω)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.2%	Rated voltage x 2.0 for 5 seconds
Resistance to Solder Heat	±1%	±0.2%	260°C ± 5°C, 10 seconds ± 1 second
Bending Test	±1%	±0.1%	Holding point 90mm, Bending 1 time, Bending 5mm
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes)/ +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±0.2%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.2%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±2%: J (±5%) ±1%: all others	±0.5%: J (±5%) ±0.2%: all others	+155°C, 1000 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


10/25/18



**features**




- Wide terminal type flat chip resistor
- High reliability and performance with T.C.R.  $\pm 75 \times 10^{-6}/K$ , resistance tolerance  $\pm 1\%$
- Suitable for flow and reflow solderings
- This product meets EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

**dimensions and construction**

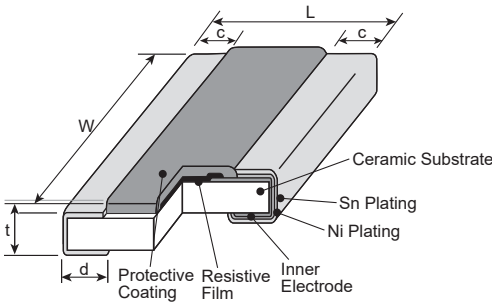

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>2B</b> (0612)	.063±.006 (1.6±0.15)	.126± <sup>+0.004</sup> <sub>-.012</sub> (3.2± <sup>+0.1</sup> <sub>-.3</sub> )	.016±.008 (0.4±0.2)	.018±.006 (0.45±0.15)	.024±.004 (0.6±0.1)
<b>2B15</b> (0612)	.063±.006 (1.6±0.15)	.126± <sup>+0.004</sup> <sub>-.012</sub> (3.2± <sup>+0.1</sup> <sub>-.3</sub> )	.016±.008 (0.4±0.2)	.018±.006 (0.45±0.15)	.024±.004 (0.6±0.1)

**Derating Curve**

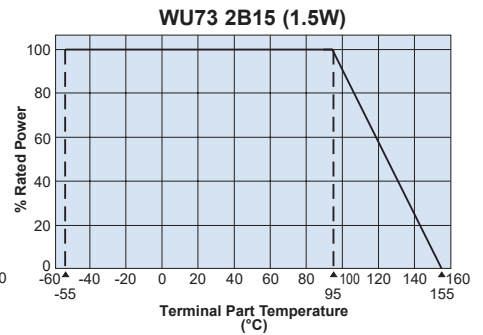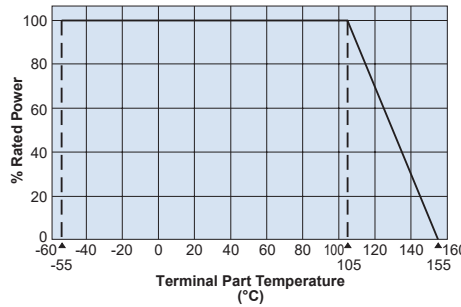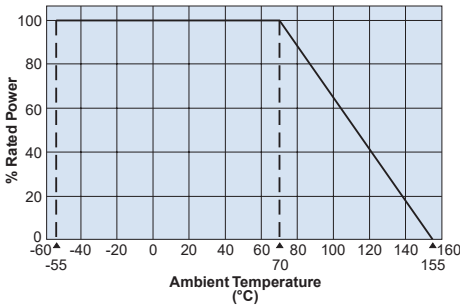

For resistors operated at an ambient temperature of 70°C or above, the power rating shall be derated in accordance with the above derating curve.

For resistors operated at a terminal part temperature of described for each size or above, the power rating shall be derated in accordance with the above derating curve. Please refer to the "Introduction of the derating curves based on terminal part temperature" in the beginning of the catalog.

**ordering information**

<b>WU73</b>	<b>2B</b>	<b>T</b>	<b>TD</b>	<b>10L0</b>	<b>F</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
WU73	2B: 1W 2B15: 1.5W	T : Sn	TD: 7" 4mm pitch punched paper For further information on packaging, please refer to Appendix A	4 digits: all values less than 100mΩ are expressed in mΩ with "L" as decimal. Ex: 10mΩ = 10L0	F: ±1%

## applications and ratings


Part Designation	Power Rating	Rated Ambient Temperature	Rated Terminal Part Temperature	T.C.R. (X 10 <sup>-6</sup> /K)	Resistance Range (Ω) E-24, 25m, 50m	Resistance Tolerance	Operating Temperature Range
WU732B	1.0W	70°C	115°C	±100	10m~12m	F: ±1%	-55°C to +155°C
				±75	13m~27m		
				±100	30m~100m		
WU732B15	1.5W	—	95°C	±100	10m~12m	F: ±1%	-55°C to +155°C
				±75	13m~27m		
				±100	30m~100m		

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

## environmental applications

### Device Temperature Data

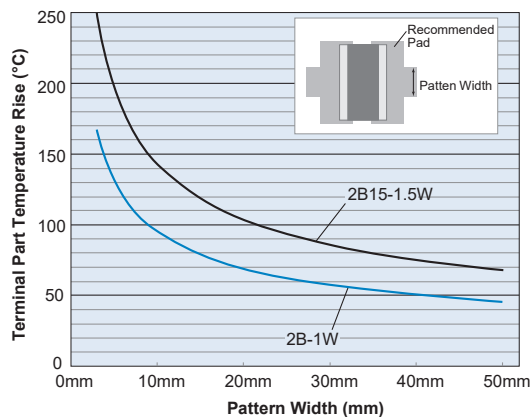

Room Temperature 25°C  
PCB: FR-4 t=1.6mm Cu foil thickness=35μm  
While using under high power, the temperature of the product may increase depending on the condition of heat dissipation from PCB.  
Be sure to check the terminal part temperature as well as precautions for use on delivery specifications before use.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.005\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.2%	Rated Voltage x 2 for 5 seconds
Resistance to Solder Heat	±1%	±0.2%	260°C ± 5°C, 10 seconds ± 1 second
Bending Test	±1%	±0.1%	Holding point 90mm, Bending 1 time, Bending 5mm
Rapid Change of Temperature	±2%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 1000 cycles
Moisture Resistance	±2%	±0.1%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±0.2%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.1%	+155°C, 1000 hours

Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.



10/25/18



### features

- Current detecting resistors for power supplies, motor circuits, etc.
- Low resistance (100mΩ or under) and high accuracy (±1%) for current detection
- High reliability and performance with T.C.R.  $\pm 75 \times 10^{-6}/K$
- Suitable for flow and reflow solderings
- Products will meet EU RoHS requirements
- AEC-Q200 qualified

### dimensions and construction

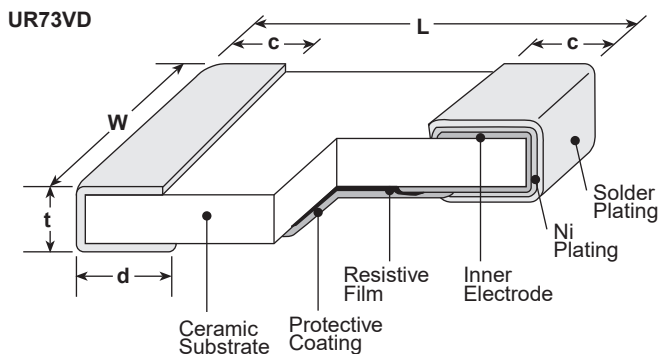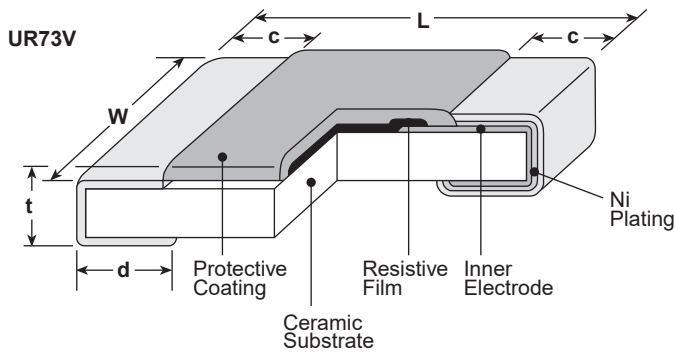

Size Code	Resistance Range (Ω)	Dimensions inches (mm)				
		L	W	c	d	t
UR73VD 2A (0805)	10m~16m	.079±.008 (2.0±0.2)	.049±.008 (1.25±0.2)	.016±.008 (0.4±0.2)	.028±.008 (0.7±0.2)	.024±.004 (0.6±0.1)
	18m~36m				.024±.008 (0.6±0.2)	
UR73V 2A (0805)	39m~100m	.079±.008 (2.0±0.2)	.049±.008 (1.25±0.2)	.016±.008 (0.4±0.2)	.016±.008 (0.4±0.2)	.024±.004 (0.6±0.1)
UR73VD 2B (1206)	10m~13m				.049±.008 (1.25±0.2)	
	15m~16m	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.016±.012 (0.4±0.3)	.045±.008 (1.15±0.2)	.024±.004 (0.6±0.1)
	18m~20m				.043±.008 (1.1±0.2)	
	22m~27m				.039±.008 (1.0±0.2)	
UR73V 2B (1206)	30m~33m			.039±.012 (1.0±0.3)		
	36m~39m	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.035±.012 (0.9±0.3)	.016 <sup>+.008</sup> <sub>-.004</sub> (0.4 <sup>+.02</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)
	43m~100m			.026±.012 (0.65±0.3)		

### ordering information

UR73V	2B	T	TD	30L0	F
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
UR73V UR73VD: Face-down	2A: 0.5W 2B: 0.5W 2B: 0.75W	T: Sn	TD: 4mm pitch punch paper	"R" indicates decimal on values = 100mΩ Ex: R100 = 100mΩ "L" indicates decimal on values <100mΩ Ex: 10L0 = 10mΩ	F: ±1%

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18

### applications and ratings

Part Designation	Power* Rating	Rated Ambient Temperature	Rated Terminal Temperature	T.C.R. (X10 <sup>-6</sup> /K)	Resistance Range (Ω) E24 & 25m, 50m	Resistance Tolerance	Operating Temperature Range
UR73V 2A	0.5W	70°C	100°C	±75	39m~100m	F: ±1%	-55°C to +155°C
UR73VD 2A	0.5W	70°C	100°C	±75	15m~36m		
				0~+150	12m~13m		
				0~+250	10m~11m		
UR73V 2B	0.5W	70°C	125°C	±75	33m~75m		
				±100	30m, 82m~100m		
	0.75W**	—	110°C	±75	33m~75m		
UR73VD 2B	0.5W	70°C	125°C	0~+250	10m~11m		
				±75	12m~27m		
	0.75W**	—	110°C	0~+250	10m, 11m		
				±75	12m~27m		


\* Rated voltage =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$

\*\* Please keep the resistor operating according to the derating curve of the terminal part temperature based on the specified power rating.


If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

### environmental applications

#### Derating Curve

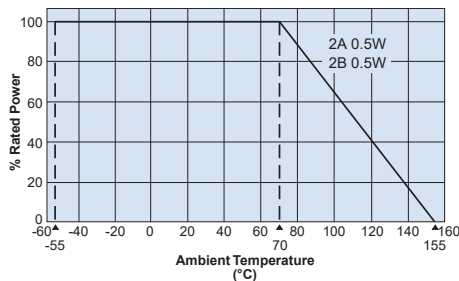

For resistors operated at an ambient temperature of 70°C or above, the power rating shall be derated in accordance with the above derating curve.

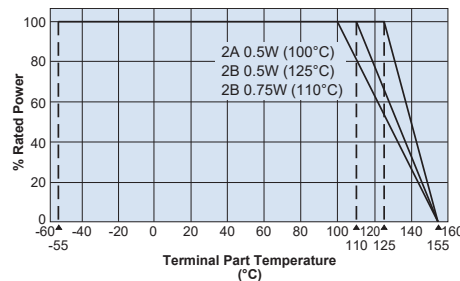

For resistors operated at a terminal part temperature of described for each size or above, the power rating shall be derated in accordance with the above derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog prior use.

#### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.005\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1%	±0.3%	260°C ± 5°C, 10 ± 1 second
Rapid Change of Temperature	±1%	±0.5%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±1%	40°C ± 2°C, 90%~95%RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±1%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	+155°C, 1000 hours


**features**

- Very low resistance, high precision reliability
- Utilization of thick film
- Low T.C.R. achieved ( $\pm 100$  ppm/ $^{\circ}$ C)
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

current sense



**dimensions and construction**

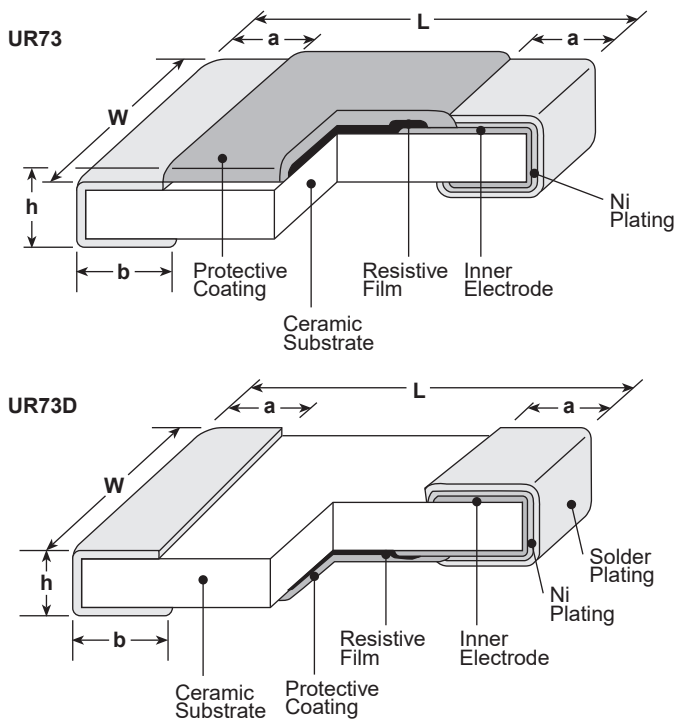

Size Code	Resistance Range ( $\Omega$ )	Dimensions inches (mm)				
		L	W	h	a	b
<b>D1E (0402)</b>	24m ~ 100m	$.039^{+.004}_{-.002}$ (1.0 <sup>+0.1</sup> <sub>-0.05</sub> )	$.020^{+.004}_{-.002}$ (0.5 <sup>+0.1</sup> <sub>-0.05</sub> )	$.016\pm.002$ (0.4 $\pm$ 0.05)	$.010\pm.004$ (0.25 $\pm$ 0.1)	$.012\pm.004$ (0.3 $\pm$ 0.1)
<b>D1J (0603)</b>	10m ~ 27m	$.063\pm.008$ (1.6 $\pm$ 0.2)	$.031^{+.005}_{-.004}$ (0.8 <sup>+0.15</sup> <sub>-0.1</sub> )	$.02\pm.004$ (0.5 $\pm$ 0.1)	$.014\pm.004$ (0.35 $\pm$ 0.1)	$.022\pm.004$ (0.55 $\pm$ 0.1)
	30m ~ 100m					$.014\pm.004$ (0.35 $\pm$ 0.1)
<b>D2A (0805)</b>	10m ~ 16m	$.079\pm.008$ (2.0 $\pm$ 0.2)	$.049\pm.008$ (1.25 $\pm$ 0.2)	$.022\pm.004$ (0.55 $\pm$ 0.1)	$.016\pm.008$ (0.4 $\pm$ 0.2)	$.024\pm.008$ (0.6 $\pm$ 0.2)
	18m ~ 30m					$.02\pm.008$ (0.5 $\pm$ 0.2)
<b>2A (0805)</b>	33m ~ 100m	$.079\pm.008$ (2.0 $\pm$ 0.2)	$.049\pm.008$ (1.25 $\pm$ 0.2)	$.02\pm.004$ (0.55 $\pm$ 0.1)	$.016\pm.008$ (0.4 $\pm$ 0.2)	$.012^{+.008}_{-.004}$ (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )
<b>D2B (1206)</b>	10m ~ 16m	$.126\pm.008$ (3.2 $\pm$ 0.2)	$.063\pm.008$ (1.6 $\pm$ 0.2)	$.024\pm.004$ (0.6 $\pm$ 0.1)	$.020\pm.008$ (0.5 $\pm$ 0.2)	$.039\pm.008$ (1.0 $\pm$ 0.2)
	18m ~ 27m					$.031\pm.008$ (0.8 $\pm$ 0.2)
<b>2B (1206)</b>	30m ~ 100m	$.126\pm.008$ (3.2 $\pm$ 0.2)	$.063\pm.008$ (1.6 $\pm$ 0.2)	$.024\pm.004$ (0.6 $\pm$ 0.1)	$.020\pm.012$ (0.5 $\pm$ 0.3)	$.016^{+.008}_{-.004}$ (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )
<b>D2H (2010)</b>	10m ~ 30m	$.197\pm.008$ (5.0 $\pm$ 0.2)	$.098\pm.008$ (2.5 $\pm$ 0.2)	$.026\pm.004$ (0.65 $\pm$ 0.1)	$.026\pm.012$ (0.65 $\pm$ 0.3)	$.063\pm.012$ (1.6 $\pm$ 0.3)
	33m ~ 100m					$.026\pm.012$ (0.65 $\pm$ 0.3)
<b>D3A (2512)</b>	10m ~ 30m	$.248\pm.008$ (6.3 $\pm$ 0.2)	$.122\pm.008$ (3.1 $\pm$ 0.2)	$.024\pm.004$ (0.6 $\pm$ 0.1)	$.031\pm.012$ (0.8 $\pm$ 0.3)	$.079\pm.012$ (2.0 $\pm$ 0.3)
	33m ~ 100m					$.031\pm.012$ (0.8 $\pm$ 0.3)

**ordering information**

<b>UR73</b>	<b>2A</b>	<b>T</b>	<b>TD</b>	<b>R100</b>	<b>F</b>
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
UR73 UR73D	1E: 0.125W 1J: 0.25W 2A: 0.33W 2B: 0.5W 2H: 0.75W 3A: 1W	T: Sn	TP: 2mm pitch punch paper (1E) TD: 7" punched paper tape (1J, 2A, 2B) TE: 7" embossed plastic (2H, 3A)	"R" indicates decimal on values = 100m $\Omega$ Ex: R100 = 100m $\Omega$ "L" indicates decimal on values <100m $\Omega$ Ex: 10L0 = 10m $\Omega$	F: $\pm 1\%$

For further information on packaging, please refer to Appendix A.



**applications and ratings**


Part Designation	Power Rating	Rated Ambient Temperature	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range	Operating Temperature Range
					F (±1%) E-24, 25mΩ, 50mΩ	
UR73D1E	1/8W (.125W)	70°C	—	±100	30mΩ - 100mΩ	-55°C to +125°C
UR73D1J	1/4W (.25W)	70°C	80°C	±500	24mΩ - 27mΩ	
				±100	47mΩ - 100mΩ	
				±200	30mΩ - 43mΩ	
UR73D2A	1/3W (.33W)	70°C	90°C	±300	10mΩ - 27mΩ	
				±250	10mΩ - 30mΩ	
UR732A	1/3W (.33W)	70°C	100°C	±100	47mΩ - 100mΩ	
				±250	33mΩ - 43mΩ	
UR73D2B	1/2W (.5W)	70°C	85°C	±200	10mΩ - 27mΩ	
UR732B	1/2W (.5W)	70°C	85°C	±100	47mΩ - 100mΩ	
				±200	30mΩ - 43mΩ	
UR73D2H	3/4W (.75W)	70°C	90°C	±250	10mΩ - 30mΩ	
				±100	33mΩ - 100mΩ	
UR73D3A	1W (1W)	70°C	95°C	±250	10mΩ - 30mΩ	
				±100	33mΩ - 100mΩ	

Rated voltage =  $\sqrt{P \cdot R}$


If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

**environmental applications**

**Derating Curve**

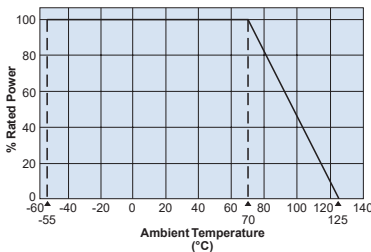


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.



For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog prior use.

**Surface Temperature Rise**

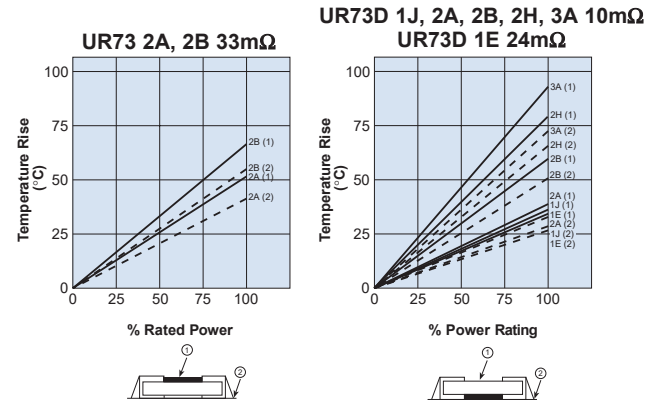

Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions.

**Performance Characteristics**

Parameter	Requirement $\Delta R \pm(\%+0.005\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1%	±0.3%	260°C ± 5°C, 10 ± 1 second
Rapid Change of Temperature	±1%	±0.5%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%	±1%	40°C ± 2°C, 90%~95%RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%	±1%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	+125°C, 1000 hours

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18


**10-ohm 0.5%, 1%, 2%, 5% tolerance thick film current sense resistor**




**features**

- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: 0402 (1E), 0603 (1J), 0805 (2A), 1206 (2B), 1210 (2E), 2010 (2H/W2H), 2512 (3A/W3A)

current sense

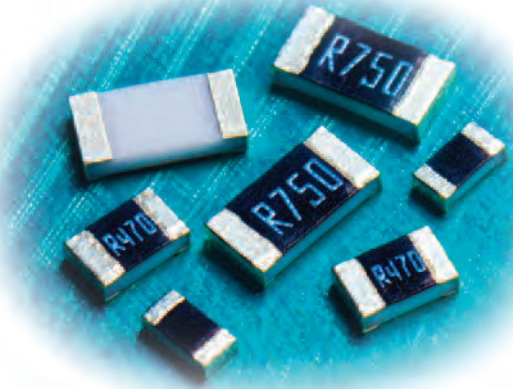

**dimensions and construction**

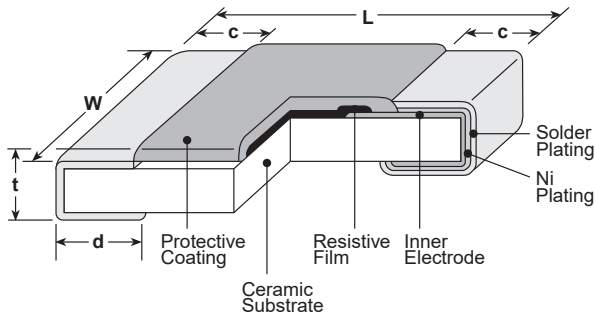

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
1H (0201)	.024±.001 (0.6±0.03)	.012±.001 (0.3±0.03)	.004±.002 (0.1±0.05)	.006±.002 (0.15±0.05)	.009±.001 (0.23±0.03)
1E (0402)	.039 <sup>+0.04</sup> <sub>-.002</sub> (1.0 <sup>+0.1</sup> <sub>-0.05</sub> )	.02 <sup>+0.04</sup> <sub>-.002</sub> (0.5 <sup>+0.1</sup> <sub>-0.05</sub> )	.01±.004 (0.25±0.1)	.01±.004 (0.25±0.1)	.014±.002 (0.35±0.05)
1J (0603)	.063±.008 (1.6±0.2)	.031 <sup>+0.06</sup> <sub>-.004</sub> (0.8 <sup>+0.15</sup> <sub>-0.1</sub> )	.014±.004 (0.35±0.1)	.014±.004 (0.35±0.1)	.018±.004 (0.45±0.1)
2A (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.08</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02±.004 (0.5±0.1)
2B (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.08</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)
2E (1210)	.102±.008 (2.6±0.2)				
2H (2010)	.098±.008 (2.5±0.2)				
W2H (2010)	.197±.008 (5.0±0.2)			.026±.006 (0.65±0.15)	
3A (2512)	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)		.016 <sup>+0.08</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	
W3A (2512)				.026±.006 (0.65±0.15)	

**ordering information**

SR73	2B	T	TD	1R00	F
Type	Size	Termination Material	Packaging	Nominal Resistance	Tolerance
1H 1E 1J 2A 2B 2E W2H W3A 2H 3A	T: Sn L: SnPb (1E, 1J, 2A, 2B, 2E, 2H, 3A) G: Au (1J, 2A, 2B: 0.1Ω - 10Ω - contact factory)	TC: 0201 only: 7" 2mm pitch pressed paper (TC: 10,000 pcs/reel, TCM: 15,000 pcs/reel) TPL:0402 only: 2mm pitch punch paper TP: 0402, 0603, 0805: 7" 2mm pitch punch paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210, 2010 & 2512: 7" embossed plastic TED: 0805, 1206, 1210, 2010 & 2512: 10" embossed plastic For further information on packaging, please refer to Appendix A	±2%, ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω ±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω All values less than 0.1Ω (100mΩ) are expressed in mΩ with "L" as decimal Example: 20mΩ = 20L (3-digit)	D: ±0.5% F: ±1% G: ±2% J: ±5%	

**applications and ratings**

Part Designation*	Power Rating @ 70°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range			
					E-24, E-96 (D±0.5%)	E-24, E-96 (F±1%)**	E-24 (G±2%)	E-24 (J±5%)
SR731H (0201)	0.1W	70°C	—	0 ~ +400	—	1Ω - 10Ω**	—	0.27Ω - 10Ω
				0 ~ +500	—	—	0.18Ω - 0.24Ω	
SR731E (0402)	1/6W (.166W)	70°C	125°C	±200	—	0.51Ω - 10Ω**	0.51Ω - 10Ω	0.51Ω - 10Ω
				±300	—	0.2Ω - 0.47Ω**	0.2Ω - 0.47Ω	0.2Ω - 0.47Ω
				±500	—	0.1Ω - 0.18Ω**	0.1Ω - 0.18Ω	0.1Ω - 0.18Ω
SR731J (0603)	1/5W (.2W)	70°C	125°C	±200	—	1.02Ω - 10Ω	1.1Ω - 10Ω	1.1Ω - 10Ω
	New 1/4W (.25W)	70°C	125°C	±200	—	0.1Ω - 1Ω	0.1Ω - 1Ω	0.1Ω - 1Ω

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/26/18

**10-ohm 0.5%, 1%, 2%, 5% tolerance thick film current sense resistor**

**applications and ratings (continued)**


current sense

Part Designation*	Power Rating @ 70°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range			
					E-24, E-96 (D±0.5%)	E-24, E-96 (F±1%)**	E-24 (G±2%)	E-24 (J±5%)
SR732A (0805)	1/3W (.33W)	70°C	125°C	±100	0.15Ω - 10Ω	0.1Ω - 10Ω	—	—
				±200	—	—	0.1Ω - 10Ω	0.1Ω - 10Ω
				±500	—	—	—	0.051Ω - 0.091Ω
	1/2W (.5W <sup>1</sup> )	—	105°C	±100	0.15Ω - 10Ω	0.1Ω - 10Ω	—	—
				±200	—	—	0.1Ω - 10Ω	0.1Ω - 10Ω
				±500	—	—	—	0.051Ω - 0.091Ω
SR732B (1206)	1/3W (.33W)	70°C	125°C	±100	0.15Ω - 10Ω	0.1Ω - 10Ω	—	—
				±200	—	—	0.1Ω - 10Ω	0.1Ω - 10Ω
				±500	—	—	—	0.056Ω - 0.091Ω
	1/2W (.5W <sup>1</sup> )	—	110°C	±100	0.15Ω - 10Ω	0.1Ω - 10Ω	—	—
				±200	—	—	0.1Ω - 10Ω	0.1Ω - 10Ω
				±500	—	—	—	0.056Ω - 0.091Ω
SR732E (1210)	1/2W (.5W)	70°C	125°C	±100	—	0.1Ω - 10Ω	—	—
				±200	—	—	0.1Ω - 10Ω	0.047Ω - 10Ω
				±500	—	—	—	0.036Ω - 0.043Ω
	2/3W (.66W <sup>1</sup> )	—	110°C	±1000	—	—	—	0.024Ω - 0.033Ω
				±100	—	0.1Ω - 10Ω	—	—
				±200	—	—	0.1Ω - 10Ω	0.047Ω - 10Ω
SR732H/W2H (2010)	3/4W (.75W)	70°C	125°C	±100	—	0.1Ω - 10Ω	—	—
				±200	—	—	0.1Ω - 10Ω	0.1Ω - 10Ω
				±500	—	—	—	0.056Ω - 0.091Ω
				±800	—	—	—	0.033Ω - 0.051Ω
SR733A/W3A (2512)	1W	70°C	125°C	±100	—	0.1Ω - 10Ω	—	—
				±200	—	—	0.1Ω - 10Ω	0.1Ω - 10Ω
				±500	—	—	—	0.056Ω - 0.091Ω
				±800	—	—	—	0.039Ω - 0.051Ω


\* Parentheses indicate EIA package size codes. \*\* 1H, 1E (F: ±1%) E-24 values only. Operating Temp: -55°C to +125°C (SR731H only), -55°C to +150°C  
 If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.  
<sup>1</sup> Prior to use, refer to the "Higher Power Ratings" in the beginning of catalog. Rated voltage = √Power rating x resistance value or max. working voltage, whichever is lower

**environmental applications**

**Derating Curve**

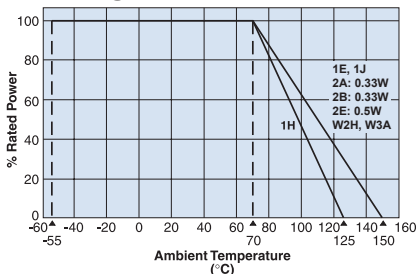


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

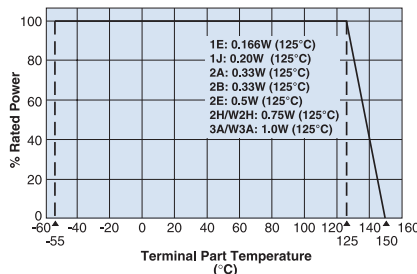

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" on the beginning of our catalog before use.

SR73 2A (0.5W), SR73 2B (0.5W), SR73 2E (0.66W)

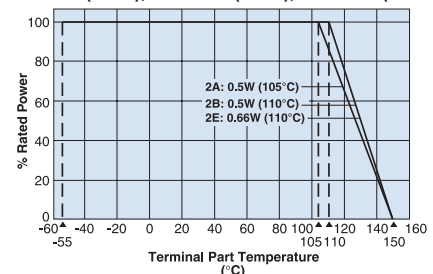

**Performance Characteristics**

Parameter	Requirement Δ R ±(%+0.005Ω)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	1H: ±3%, 1E~W3A: ±1%	1H: ±0.75% 1E~W3A: ±0.3%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1%	±0.3%	-40°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	1H: ±3% 1E~W3A: ±2%	±1%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	1H: ±3% 1E~W3A: ±2%	±1%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	1H: +125°C, 1000 hours; 1E, 1J, 2A, 2B, 2E, 2H/W2H, 3A/W3A: +150°C, 1000 hours

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/06/18

**NEW**


current sense



**features**

- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

**dimensions and construction**

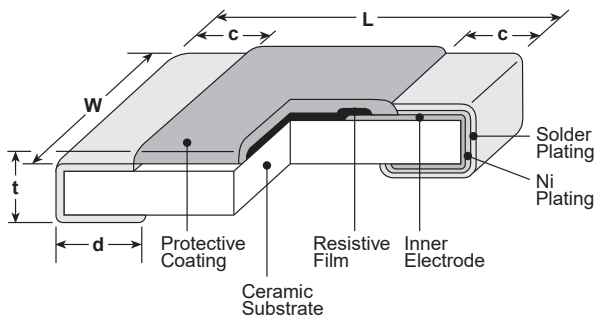

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>3A2 (2512)</b>	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-0.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)
<b>W3A2 (2512)</b>				.026±.006 (0.65±0.15)	

**ordering information**

<b>SR73</b>	<b>3A2</b>	<b>T</b>	<b>TE</b>	<b>1R00</b>	<b>F</b>
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
	3A2 W3A2	T: Sn	TE: 7" embossed plastic TED: 10" embossed plastic For further information on packaging, please refer to Appendix A	±2%, ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω ±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω All values less than 0.1Ω (100mΩ) are expressed in mΩ with "L" as decimal Example: 20mΩ = 20L (3-digit)	F: ±1% G: ±2% J: ±5%


## applications and ratings

Part Designation*	Power Rating @ 70°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range			
					E-24, E-96 (D±0.5%)	E-24, E-96 (F±1%)	E-24 (G±2%)	E-24 (J±5%)
SR733A2/W3A2 (2512)	2W	—	95°C	±100	—	0.1Ω - 10Ω	—	—
				±200	—	—	0.1Ω - 10Ω	0.1Ω - 10Ω
				±500	—	—	—	0.056Ω - 0.091Ω
				±800	—	—	—	0.039Ω - 0.051Ω

\* Parentheses indicate EIA package size codes. Operating Temp: -55°C to +150°C  
 Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

## environmental applications

### Derating Curve

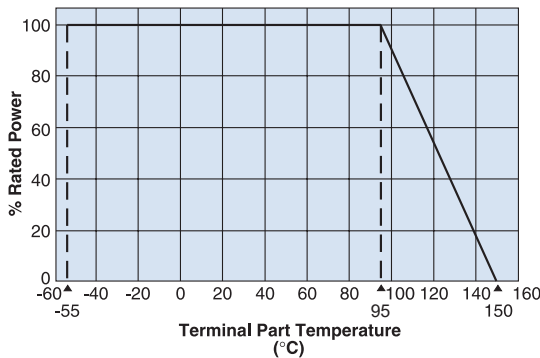

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.005\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated voltage x 2.0 for 5 seconds
Resistance to Solder Heat	1H: ±3%, 1E~W3A2: ±1%	±0.3%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1%	±0.3%	-40°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	1H: ±3% 1E~W3A2: ±2%	±1%	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	1H: ±3% 1E~W3A2: ±2%	±1%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	+150°C, 1000 hours







### features

- Suitable to detect large current due to ultra low resistances
- Flame retardant resistor in a ceramic case
- All custom-made products
- Automatic mounting is available
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

### dimensions and construction

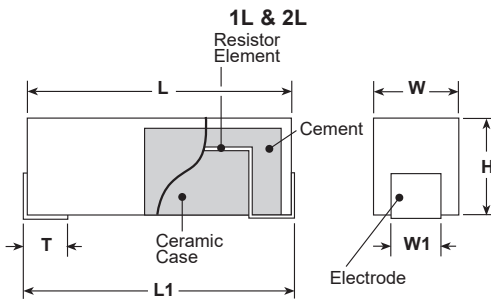

Size Code	Dimensions inches (mm)							
	L	L1	W	W2	H	W1	t	T
1L	.512±.019 (13±0.5)	.551±.039 (14±1.0)	.217±.019 (5.5±0.5)	—	.205±.019 (5.2±0.5)	—	—	.098±.039 (2.5±1.0)
2L	.709±.019 (18±0.5)	.748±.039 (19±1.0)	.248±.019 (6.3±0.5)	—	.236±.006 (6.0±0.5)	.118±.012 (3.0±0.03)	—	.118±.039 (3.0±1.0)
3L	—	.760±.039 (19.3±1.0)	.323±.019 (8.2±0.5)	.362 (9.2)	—	—	.012 (0.3)	—

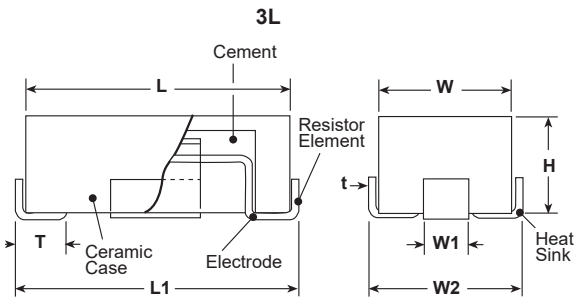

### ordering information

<b>BLR</b>	<b>1L</b>	<b>N</b>	<b>TE</b>	<b>50L</b>	<b>J</b>
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
	1L: 1W 2L: 2W 3L: 15W	N: No surface treatment	TE: 7" embossed plastic 1, 2: 1,000 pieces/reel 3: 750 pieces/reel	3 digits All values less than 0.1Ω (100mΩ) are expressed in mΩ with "L" as decimal Ex: 2mΩ = 2L0	J: ±5% K: ±10%

For further information on packaging, please refer to Appendix A.

## applications and ratings


Part Designation	Power Rating	T.C.R. (ppm/°C) Max.	Resistance Range*	Resistance Tolerance	Rated Ambient Temperature	Operating Temperature Range
BLR1L	1W	±100	25m, 50mΩ	J: ±5% K: ±10%	+70°C	-40°C to +180°C
BLR2L	2W		8m, 12m, 13m, 16m, 17.5m, 20m, 22m, 25mΩ			
BLR3L	15W**					

\* Please consult with us in advance about resistance value for custom-made products

\*\* It is assumed to be used on aluminum circuit board

## environmental applications

### Derating Curve

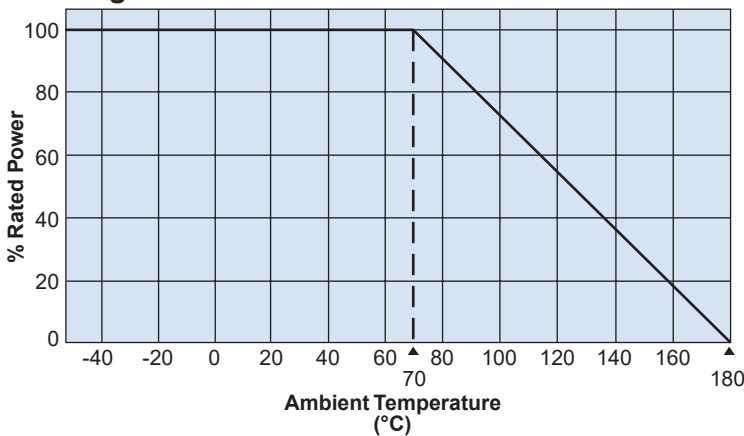

## Performance Characteristics



Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified value	—	+25°C/+125°C
Cold Resistance	±5.0%	±2.0%	-55°C, 1000 hours
Heat Resistance	±5.0%	±2.0%	+125°C, 1000 hours
Moisture Resistance	±5.0%	±2.0%	40°C ± 2°C, Power rating x 1/10, 90% - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Load Life	±5.0%	±2.0%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle



### features

- Superior thermal expansion cycling
- Inductance less than 10nH
- Solderable pads (60/40 SnPb plate)
- Lead flexible for thermal expansion
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

### dimensions and construction

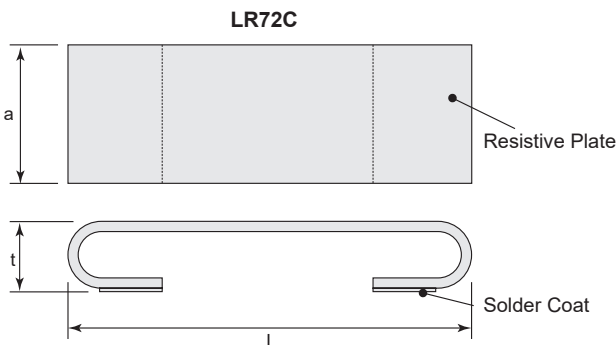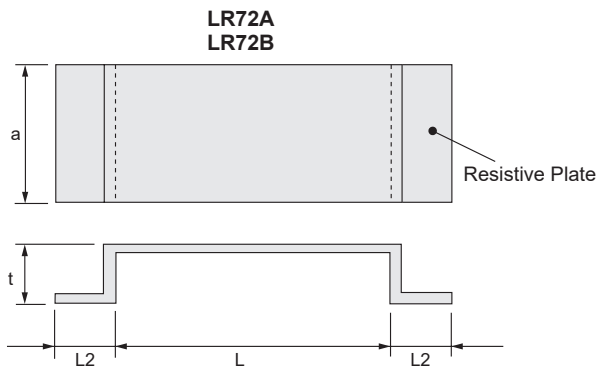

Size Code	Dimensions inches (mm)			
	L	L2 <sup>+0.1</sup> <sub>-.02</sub>	W	t
LR72A	.39±.004 (10.0±0.1)	.079 (2.0)	.20±.008 (5.2±0.2)	.079 (2 Max.)
LR72B	.39±.004 (10.0±0.1)	.079 (2.0)	.118±.008 (3.0±0.2)	.079 (2 Max.)
LR72C	.44±.016 (11.2±0.4)	—	.126±.016 (3.2±0.4)	.137±.016 (3.5±0.4)

### ordering information

LR72	A	D	TED	2L0	J
Type	Size	Termination Material	Packaging	Nominal Resistance	Tolerance
	A B C	D: SnAgCu (LR72C only) N: CuNi (non-presolder) (LR72A, B only)	TED: LR72A LR72B TEB: LR72C	2mΩ: 2L0 "L" indicates the decimal in milliohms	J: ±5%

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/11/15

### applications and ratings


Part Designation	Power Rating*	T.C.R. (ppm/°C) Max.	Standard Resistance**	Resistance Tolerance	Rated Ambient Temperature	Operating Temperature Range
LR72A	1/2W	±100	2.5mΩ, 5mΩ, 8mΩ	J: ±5%	+70°C	-40°C to +180°C
LR72B	1/4W		3mΩ			
LR72C	1W	±350	2mΩ, 3mΩ		+85°C	-40°C to +155°C

\* Rated power in case of glass epoxy resin (FR-4) is used for the substrate material

\*\* Please contact factory for custom made resistance values

### environmental applications

#### Derating Curve

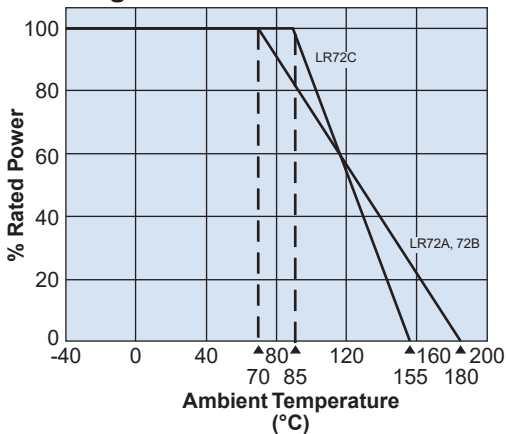

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

### Performance Characteristics

Parameter	Requirement Δ R ±%		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Resistance to Soldering Heat	±2.0%	±1.6%	350°C ± 10°C, 3 seconds
Moisture Resistance	±5.0%	±4.5%	Power rating x 1/10, 40°C, 90% - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±5.0%	±4.5%	Rated voltage 70°C, 1000 hours 1.5 hr ON, 0.5 hr OFF cycle

**features**


- Extremely low resistance and high precision tolerance
- Low T.C.R. achieved ( $\pm 50\text{ppm}/^\circ\text{C}$ )
- Flameproof UL94V0
- Products with lead-free terminations meet EU RoHS and China RoHS requirements



current sense

**dimensions and construction**

Size Code	Dimensions inches (mm)										
	L	W	t	a	b	c	d	e	f	g	h
CSR1	.425±.02 (10.8±0.5)	.244±.012 (6.2±0.3)	.083±.008 (2.1±0.2)	.118±.012 (3.0±0.3)	.031±.008 (0.8±0.2)	.055±.02 (1.4±0.5)	.047±.02 (1.2±0.5)	.051±.012 (1.3±0.3)	.051±.012 (1.3±0.3)	.197±.004 (5.0±0.1)	.098±.004 (2.5±0.1)
CSR2	.504±.02 (12.8±0.5)	.323±.012 (8.2±0.3)	.122±.008 (3.1±0.2)	.197±.012 (5.0±0.3)	.039±.008 (1.0±0.2)	.079±.02 (2.0±0.5)	.079±.02 (2.0±0.5)	.087±.012 (2.2±0.3)	.087±.012 (2.2±0.3)	.236±.004 (6.0±0.1)	.118±.004 (3.0±0.1)

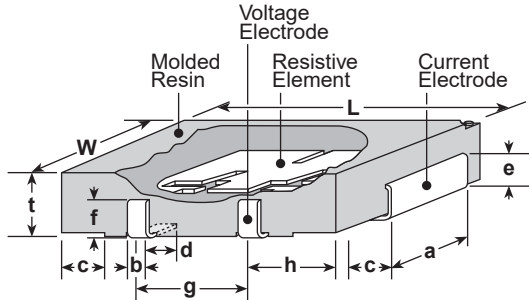


**ordering information**

<b>CSR</b>	<b>1</b>	<b>T</b>	<b>TED</b>	<b>10L0</b>	<b>F</b>
Type	Power Rating	Termination Material	Packaging	Nominal Resistance	Tolerance
	1: 1W 2: 2W	T: Sn (Other termination styles may be available, please contact factory for options)	TED: CSR1 TEB: CSR2 (1,000 pieces/reel)	In milliohms: 3 significant figures "L" indicates decimal point	D: ±0.5% F: ±1%

For further information on packaging, please refer to Appendix A.



## typical circuit schematic

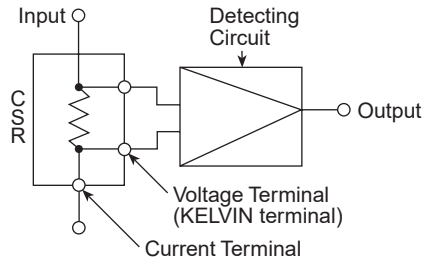


## applications and ratings

Part Designation	Power Rating	T.C.R. (ppm/°C) Max.	Resistance Range E-12	Resistance Tolerance	Rated Ambient Temperature	Operating Temperature Range
CSR1	1W	±50	5mΩ - 50mΩ	D: ±0.5%, F: ±1%	+70°C	-55°C to +125°C
CSR2	2W			F: ±1%		


## environmental applications

### Derating Curve

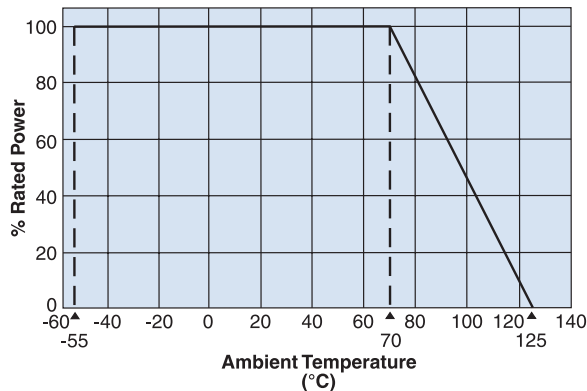

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

### Surface Temperature Rise

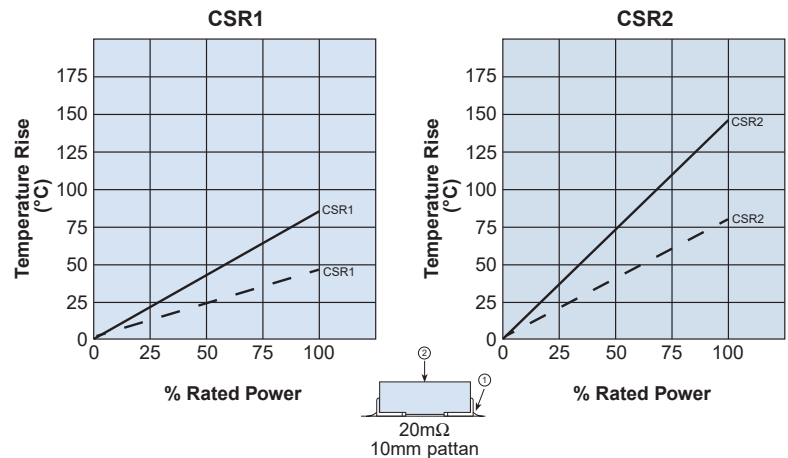

Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions. Please refer to us before use.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm\%$		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Overload (Short Time)	±1.0%	±1.0%	Rated power x 5 for 5 seconds
Resistance to Solder Heat	±1.0%	±1.0%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1.0%	±0.5%	-55°C (30 minutes), +125°C (30 minutes), 500 cycles
Moisture Resistance	±2.0%	±0.5%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±1.0%	±0.5%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Low Temperature Exposure	±0.5%	±0.25%	-55°C, 1 hour
High Temperature Exposure	±0.5%	±0.25%	+125°C, 100 hours




## features


- Free direction for mounting due to cylindrical design
- High precision products (Resistance tolerance  $\pm 0.1\%$  and T.C.R.  $\pm 25 \times 10^{-6}/K$ ) available (RN41)
- The electrode strength is firm
- The noise characteristics is excellent
- Suitable for reflow, flow and iron solderings
- Products meet EU-RoHS requirements
- AEC-Q200 qualified (RN41 2ES/3AS, CC 12M/25)

## dimensions and construction

RN41, RM41, RD41



CC



Type (Inch/DIN Size Code)	Dimensions inches (mm)				
	L	C	D1	D2 (max.)	D3 (max.)
<b>2A</b> (0805/0102)	.079±.004 (2.0±0.1)	.012 (0.3 min.)	.049±.002 (1.25±0.05)	.053 (1.35)	.003 (0.07)
<b>2D</b> (1206/0203)	.126±.008 (3.2±0.2)	.02 (0.5 min.)	.061±.006 (1.55±0.15)	.069 (1.75)	.004 (0.1)
<b>2ES</b> (1406/0204)	.138±.008 (3.5±0.2)	.02 ~ .035 (0.5 ~ 0.9)	.055±.004 (1.4±0.1)	.061 (1.55)	.004 (0.1)
<b>CC12M</b> (1406/0204)	.138±.008 (3.5±0.2)	.02 ~ .035 (0.5 ~ 0.9)	.055±.004 (1.4±0.1)	.061 (1.55)	.004 (0.1)
<b>2E, 2H, 3AS</b> (2309/0207)	.232±.008 (5.9±0.2)	.02 (0.5 min.)	.087±.004 (2.2±0.1)	.094 (2.4)	.006 (0.15)
<b>CC25</b> (2309/0207)	.232±.008 (5.9±0.2)	.02 (0.5 min.)	.087±.004 (2.2±0.1)	.094 (2.4)	.006 (0.15)

## ordering information

RN41	2ES	T	TE	1001	F	50*
<b>Type</b>	<b>Size</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>	<b>T.C.R. (ppm/°C)</b>
RN41 RM41 RD41	2A: 0.125W 2D: 0.2W 2ES: 0.25W, 0.4W 2E: 0.25W 2H: 0.5W 3AS: 1W	T: Sn	TE: 7" embossed plastic (2A, 2ES - 3,000 pieces/reel) (2D - 2,000 pieces/reel) (2E, 2H, 3AS - 1,500 pieces/reel)	±5%: 2 significant figures + 1 multiplier. "R" indicates decimal on values <10Ω  ±1%: 3 significant figures + 1 multiplier. "R" indicates decimal on values <100Ω	B: ±0.1% C: ±0.25% D: ±0.5% F: ±1% G: ±2% J: ±5%	25: ±25 50: ±50 100: ±100 200: ±200 Nil: RM41 RD41

\*T.C.R. noted for RN41 only

CC12M	T	TE
<b>Type</b>	<b>Termination Material</b>	<b>Packaging</b>
CC12M CC25	T: Sn	TE: 7" embossed plastic

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/26/18

## applications and ratings

Part Designation	Power Rating @ 70°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range					Max. Working Voltage	Max. Overload Voltage
					E-24, E-96 (B±0.1%)	E-24, E-96 (C±0.25%)	E-24, E-96 (D±0.5%)	E-24, E-96 (F±1%)	E-24 (J±5%)		
RN412A	1/8W (.125W)	70°C	—	±100	—	—	—	100Ω-100kΩ	—	150V	200V
RN412D	1/5W (.2W)	70°C	—	±50	—	—	—	10Ω-604kΩ	—		300V
RN412ES	1/4W (.25W)	70°C	90°C	±25	43Ω-511kΩ	100Ω-100kΩ	100Ω-604kΩ	—	—	200V	400V
		70°C	90°C	±50	—	—	—	1Ω-5.11MΩ	0.22Ω-0.91Ω		
RN412ES	2/5W (.4W)*1*2	—	90°C	±50	—	—	—	1Ω-5.11MΩ	0.22Ω-0.91Ω	200V	400V
RN412H	1/2W (.5W)	70°C	—	±200	—	—	—	0.22Ω-100kΩ	—	250V	600V
RN413AS	1W*2	70°C	—	±50	—	—	—	1Ω-1MΩ	0.22Ω-0.91Ω	400V	600V
RM412D	1/5W (.2W)	70°C	—	±350	—	—	—	0.22Ω-8.2Ω (E-12)	—	—	—
RM412H	1/2W (.5W)	70°C	—	±350	—	—	—	—	—	—	—
RD412ES	1/4W (.25W)	70°C	—	—*3	—	—	—	2.2 - 1.0M	2.2 - 1.0M	200V	400V
RD412E	1/4W (.25W)	70°C	—	—*3	—	—	—	1.0 - 2.2M	1.0 - 2.2M	300V	600V

Part Designation	Current Rating	Rated Ambient Temp.	Maximum Resistance
CC12M	2A	+70°C	20 mΩ or less
CC25	5A		


\*1 A power rating is guaranteed at the terminal part temperature. If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

\*2 A power rating shall be guaranteed with a method shown in the Performance Characteristics. Please contact factory prior to use.


\*3 Please contact factory for T.C.R. of RD41  
Operating Temperature Range: -55°C to +155°C

## environmental applications

### Derating Curve

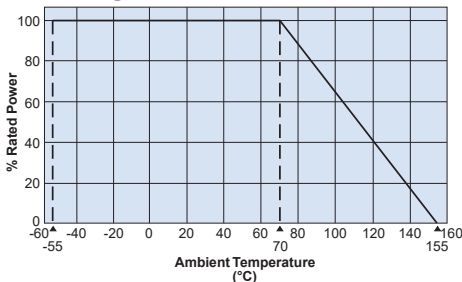

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

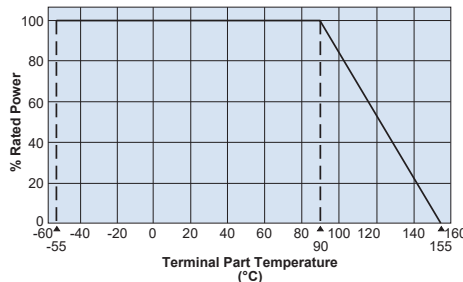

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

## Performance Characteristics

Parameter	Type	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
		Limit	Typical	
Resistance	RN41 RM41 RD41	Within specified tolerance	—	25°C
T.C.R.	RN41 RM41 RD41	Within specified T.C.R.	—	+25°C/-55°C, +25°C/+125°C
Overload (Short time)	RN41	$\pm 0.5\%$	$\pm 0.3\%$	Rated voltage x 2.5 for 5 seconds or Max. overload voltage, whichever is lower, for 5 seconds
	RM41	$\pm 0.5\%$	$\pm 0.3\%$	
	RD41	$\pm 1\%$	$\pm 0.5\%$	
Intermittent Overload	RN41 <sup>1</sup>	$\pm 1\%$	—	Rated voltage x 4 (RD41: 2Ax3) or Max. intermittent overload voltage, whichever is lower, 10,000 cycles
	RM41	$\pm 0.5\%$ : 2E	—	
	RD41	$\pm 1\%$	—	
Resistance to Soldering Heat	RN41 <sup>2</sup>	$\pm 2\%$ : 2H (10 $\Omega$ >) $\pm 1\%$ : 2H (10 $\Omega$ ≤) $\pm 0.5\%$ : 2A~2E	$\pm 1\%$ : 2H (10 $\Omega$ >) $\pm 0.5\%$ : 2H (10 $\Omega$ ≤) $\pm 0.3\%$ : 2A~2E	260°C $\pm$ 5°C, 10 seconds $\pm$ 1 second
	RD41	$\pm 1\%$	$\pm 0.5\%$	
Rapid Change of Temperature	RN41 <sup>2</sup>	$\pm 0.5\%$ : 2A~2E $\pm 1\%$ : 2H	$\pm 0.3\%$ : 2A~2E $\pm 0.7\%$ : 2H	-55°C (30 minutes), +125°C (30 minutes), 5 cycles
	RM41	$\pm 1\%$	$\pm 0.75\%$	
	RD41	$\pm 1\%$	$\pm 0.75\%$	
Moisture Resistance	RN41 <sup>1</sup>	$\pm 1\%$ : 2D, 2E $\pm 3\%$ : 2A; $\pm 5\%$ : 2H	$\pm 0.75\%$ : 2D, 2E $\pm 1.5\%$ : 2A; $\pm 3\%$ : 2H	40°C $\pm$ 2°C, 90 ~ 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
	RM41	$\pm 5\%$	$\pm 3\%$	
	RD41	$\pm 5\%$	$\pm 2.5\%$	
Endurance at 70°C	RN41 <sup>4</sup>	$\pm 1\%$ : 2D, 2E $\pm 3\%$ : 2A; $\pm 5\%$ : 2H	$\pm 0.5\%$ : 2D, 2E $\pm 1.5\%$ : 2A; $\pm 3\%$ : 2H	70°C $\pm$ 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
	RM41	$\pm 5\%$	$\pm 3\%$	
	RD41	$\pm 2\%$	$\pm 1\%$	
Low Temperature Exposure	RD41	$\pm 1\%$	$\pm 0.75\%$	-55°C, 1 hour
High Temperature Exposure	RN41 <sup>3</sup>	$\pm 1\%$	$\pm 0.75\%$	155°C, 2 hours
	RD41	$\pm 2\%$	$\pm 1\%$	RN41: 2ES, 3AS: 155°C, 1000 hours


<sup>1</sup> 2ES: Does Not Apply    <sup>2</sup> 2ES: Test Group D    <sup>3</sup> 2ES: Test Group A    <sup>4</sup> 2ES: Test Group C

## CC

Parameter	Requirement $\Delta$ Real R		Test Method
	Limit	Typical	
Resistance	20m $\Omega$ Max. after the test	7.5m $\Omega$ Max. after the test	25°C
Resistance to Solder Heat			260°C $\pm$ 5°C, 10 seconds $\pm$ 1 second
Rapid Change of Temperature			-55°C (30 minutes), +125°C (30 minutes), 5 cycles
Moisture Resistance			40°C $\pm$ 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C			70°C $\pm$ 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle

## \*Stability Class


Stability Class	Resistance Range	Limit Resistance Changing Attests (Test Group)			
		A	B	C	D
0.25	10-332k $\Omega$	$\pm(0.25 + 0.05\Omega)$	$\pm(0.50 + 0.05\Omega)$	$\pm(0.25 + 0.05\Omega)$	$\pm(0.05 + 0.05\Omega)$
0.5	1-<10 $\Omega$			$\pm(0.50 + 0.05\Omega)$	$\pm(0.10 + 0.05\Omega)$
1	0.22-<1 $\Omega$			$\pm(1.00 + 0.05\Omega)$	$\pm(0.25 + 0.05\Omega)$
2	>332k $\Omega$ -≤5.11M $\Omega$	$\pm(0.50 + 0.05\Omega)$	$\pm(1.00 + 0.05\Omega)$	$\pm(2.00 + 0.05\Omega)$	$\pm(0.50 + 0.05\Omega)$

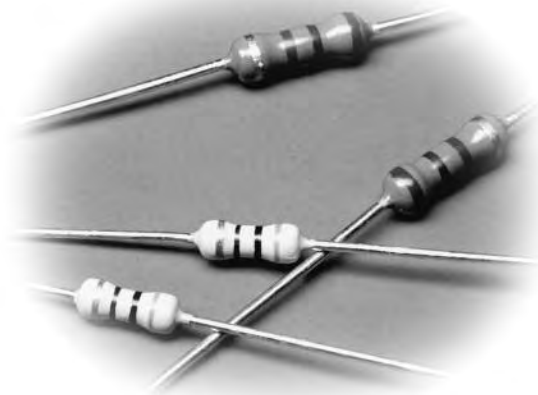

### features

- Flameproof coating is available (specify "CFP")
- Reduced body size (specify "CFS/CFPS")
- Suitable for automatic machine insertion
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

### dimensions and construction

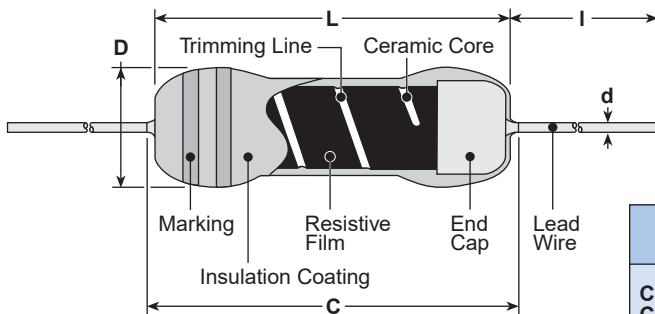

Type	Dimensions inches (mm)				I**	
	L	C (max.)	D	d (nom.)	Standard	Long
<b>CFS1/4</b> <b>CFPS1/4</b>	.126±.008 (3.2±0.2)	.134 (3.4)	.067 <sup>+0.008</sup> / <sub>-.004</sub> (1.7 <sup>+0.2</sup> / <sub>-0.1</sub> )	.018 (0.45)	.551 Min.* (14.0 Min.)	.787 Min.*** (20.0 Min.)
<b>CF1/4</b> <b>CFP1/4</b>	.240± <sup>+0.028</sup> / <sub>-.02</sub> (6.1± <sup>+0.7</sup> / <sub>-0.5</sub> )	.280 (7.1)	.092±.012 (2.3±0.3)	.024 (0.6)		
<b>CFS1/2</b> <b>CFPS1/2</b>	.248±.02 (6.3±0.5)	.280 (7.1)	.112± <sup>+0.012</sup> / <sub>-.026</sub> (2.85±0.65)	.024 (0.6)	.787 Min. (20.0 Min.)	—
<b>CFB1/2</b> <b>CFPB1/2</b>	.354±.039 (9.0±1.0)	.433 (11.0)	.138±.02 (3.5±0.5)	.028 (0.7)		

\* Forming code S is applied for bulk type.

\*\* Lead length changes depending on taping and forming type.

\*\*\* Long type is custom-made

### ordering information

CF	1/4	C	T52	R	103	J
Type	Power Rating	Termination Material	Taping and Forming	Packaging	Nominal Resistance	Tolerance
CF CFP	S1/4: 0.25W 1/4: 0.25W S1/2: 0.5W B1/2: 0.5W	C: SnCu	Axial: T26, T52, L52 Radial: VT, MT, MHT, VTP, VTE U Forming: U, UCL M Forming: M5, M10, M12.5 L Forming: L10, L12.5 S Forming: S	A: Ammo R: Reel	2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω	G: ±2% J: ±5%

For further information on packaging, please refer to Appendix C.




## applications and ratings

Part Designation	Power Rating @ 70°C	Minimum Dielectric Withstanding Voltage	T.C.R. (ppm/°C)				Resistance Range E-24 (G±2%)	Resistance Range E-24 (J±5%)	Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage
			+350 to -450	0 to -700	0 to -1000	0 to -1300				
CFS1/4	0.25W	300V	2.2Ω - 47kΩ	51kΩ - 100kΩ	110kΩ - 330kΩ	360kΩ - 1MΩ	10Ω - 330kΩ	2.2Ω - 1MΩ	250V	500V
CFPS1/4										
CF1/4										
CFP1/4	0.50W	500V	2.2Ω - 100kΩ	110kΩ - 330kΩ	360kΩ - 1MΩ	1.1MΩ - 5.1MΩ	10Ω - 1MΩ	2.2Ω - 5.1MΩ	300V	600V
CFS1/2										
CFPS1/2	0.50W	700V	1.0Ω - 91kΩ	100kΩ - 1MΩ	1.1MΩ - 2.2MΩ	2.4MΩ - 5.1MΩ	10Ω - 1MΩ	1.0Ω - 5.1MΩ	350V	700V
CFB1/2										
CFB1/2	0.50W	700V	2.2Ω - 100kΩ	110kΩ - 1MΩ	1.1MΩ - 2.2MΩ	2.4MΩ - 5.1MΩ	10Ω - 1MΩ	2.2Ω - 5.1MΩ	400V	800V

Operating temperature: -55°C ~ +155°C


## environmental applications

### Derating Curve

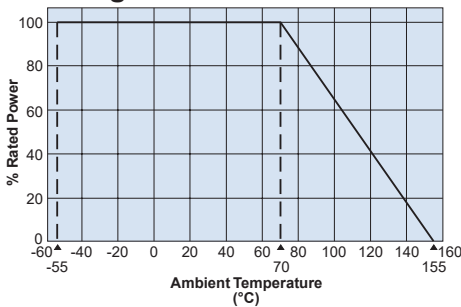


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

### Surface Temperature Rise

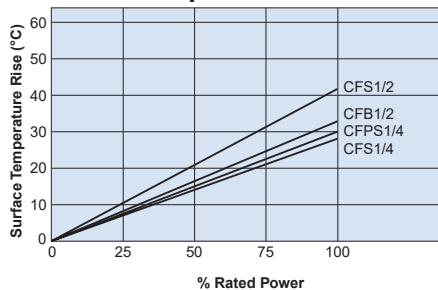

### Load Life @ 70°C, 1000 Hr

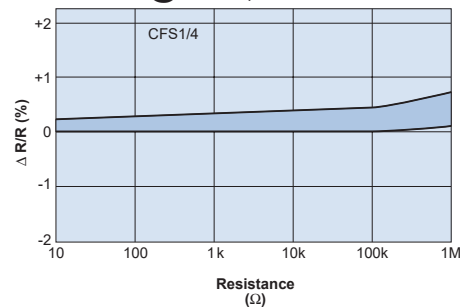

## Performance Characteristics


Parameter	Requirement Δ R ±(% + 0.05Ω)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	Measuring points are at 10mm ±1mm from the end cap.
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Overload (Short time)	±1%	±0.5%	Rated voltage x 2.5 or max. overload voltage for 5 seconds, whichever is lower
Resistance to Solder Heat	±1%	±0.5%	260°C ±5°C, 10 seconds ± 1 second
Terminal Strength	No lead-coming off and loose terminals	—	Twist 360°C, 5 times
Rapid Change of Temperature	±1%	±0.5%	-55°C (30 minutes), +125°C (30 minutes), 5 cycles
Moisture Resistance	±5%	±2.5%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±3%	±1.5%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Resistance to Solvent (CFS & CFPS only)	No abnormality in appearance. Marking shall be easily legible.	—	Ultrasonic washing with Isopropyl alcohol for 2 minutes. Power: 0.3W/cm², f: 28kHz, temp: 35°C±5°C
Flame Retardant (CFS & CFPS only)	No evidence of flaming or self-flaming	—	Flame test: The test flame shall be applied and removed for each 15 seconds respectively to repeat the cycle 5 times. Overload flame retardant: Power (AC) corresponding to 2, 4, 8, 16 and 32 times the power rating shall be applied for each 1 minute until disconnection occurs. However the applied voltage shall not exceed 4 times the maximum operating voltage.



### features


- Semi-precision metal film resistors
- Meets requirements of MIL-R-22684
- Suitable for automatic machine insertion
- MFS two times the power rating of the standard body type
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- AEC-Q200 Qualified: MF1/4, MFS1/4, MFS1/2

### dimensions and construction

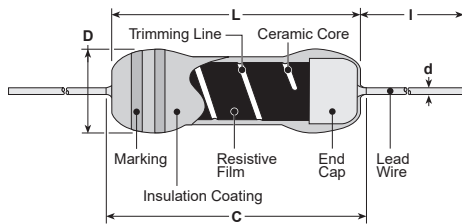


Type	Dimensions inches (mm)				
	L (ref.)	C (max.)	D	d (nom.)	I*
MFS1/4	.126 <sup>+0.02</sup> <sub>-.008</sub> (3.2 <sup>+0.5</sup> <sub>-.2</sub> )	.133 (3.4)	.066 <sup>+0.016</sup> <sub>-.004</sub> (1.7 <sup>+0.4</sup> <sub>-.1</sub> )	.018 (0.45)	1.10±.118 (28.0±3.0)
MF1/4	.248±.02 (6.3±0.5)	.280 (7.1)	.091±.012 (2.3±0.3)	.024 (0.6)	
MFS1/2	.248±.02 (6.3±0.5)	.280 (7.1)	.091±.012 (2.3±0.3)	.024 (0.6)	
MF1/2C MF1/2D	.354±.04 (9.0±1.0)	.437 (11.1)	.138 <sup>+0.016</sup> <sub>-.02</sub> (3.5 <sup>+0.4</sup> <sub>-.5</sub> )	.024 (0.6)	1.10 <sup>+0.012</sup> <sub>-.016</sub> (28.0±3.0) -4.0
MF1/2L	.354±.04 (9.0±1.0)	.437 (11.1)	.138±.016 (3.5±0.4)	.024/.031 (0.6)/(0.8)	1.10±.118 (28.0±3.0)
MF1	.610±.02 (15.5±0.5)	.721 (18.3)	.217±.02 (5.5±0.5)	.031 (0.8)	1.50 <sup>+0.012</sup> <sub>-.016</sub> (38.0±3.0) -5.0
RK1/4	.248±.02 (6.3±0.5)	.280 (7.1)	.091±.012 (2.3±0.3)	.024 (0.6)	0.94 min. (24.0 min.)
RK1/2	.374±.04 (9.5±1.0)	.437 (11.1)	.138±.016 (3.5±0.4)	.024 (0.6)	
RK1	.610±.04 (15.5±1.0)	.720 (18.3)	.217±.02 (5.5±0.5)	.031 (0.8)	1.50±.118 (38.0±3.0)

### Derating Curve



### Surface Temperature Rise



### ordering information

MF	1/4	L	C	T52	8	R	R20	J
<b>Type</b>	<b>Power Rating</b>	<b>T.C.R.</b>	<b>Termination Material</b>	<b>Taping and Forming</b>	<b>Lead Diameter</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
MF MFS RK	1/4: 0.25W 1/2: 0.50W 1: 1W	E: ±25 C: ±50 D: ±100 L: ±200 G: ±250 B: ±350	C: SnCu	1/4: T26, T52, VT, VTP, VTE, MT, M, U, M10, M12.5 1/2: T26, T52, VTP, VTE, M12.5, M15 1: T521	MF1/2L: T52 & Bulk Only: 6: 0.6mm 8: 0.8mm Blank: All others sizes & packaging	A: Ammo R: Reel	+2%: 2 significant figures + 1 multiplier +0.5%, +1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	B: ±0.1% C: ±0.25% D: ±0.5% F: ±1% G: ±2% J: ±5%

For further information on packaging, please refer to Appendix C.

\* Lead length changes depending on taping and forming.

### applications and ratings

Part Designation	Power Rating @ 70°C	Minimum Dielectric Withstanding Voltage	T.C.R. (ppm/°C)	Resistance Range (Ω)						Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temperature Range
				(B±0.1%) E-96	(C±0.25%) E-96	(D±0.5%) E-24 E-192	(F±1.0%) E-24 E-96	(G±2.0%) E-24	(J±5.0%) E-24			
MFS1/4C	0.25W	300V	C: ±50	—	—	49.9 - 562k	10 - 1M	—	—	250V	500V	-55°C to +155°C
MFS1/4D			D: ±100	—	—	—	—	—				

### applications and ratings (continued)


Part Designation	Power Rating @ 70°C	Minimum Dielectric Withstanding Voltage	T.C.R. (ppm/°C)	Resistance Range (Ω)						Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temperature Range
				(B±0.1%) E-96	(C±0.25%) E-96	(D±0.5%) E-24 E-192	(F±1.0%) E-24 E-96	(G±2.0%) E-24	(J±5.0%) E-24			
MF1/4C	0.25W	500V	C: ±50	—	—	10-2.21M	10-2.21M	—	—	250V	500V	-55°C to +155°C
MF1/4D			D: ±100	—	—							
MF1/4L			L: ±200	—	—	—	1.0 - 10	0.51 - 10				
MFS1/2C	0.50W	500V	C: ±50	—	—	10 - 1M	10 - 2.21M	10 - 2.2M	—	350V	700V	
MFS1/2D			D: ±100	—	—							
MF1/2C	0.50W	700V	C: ±50	—	—	10 - 5.05M	10 - 4.99M	—	—	350V	700V	
MF1/2D			D: ±100	—	—		10 - 5.11M					
MF1/2L			L: ±200	—	—	—	1.0 - 10	0.51 - 10Ω				
MF1C	1W	700V	C: ±50	47.5 - 1.0M	47.5 - 2.49M	10 - 5.11M	1.0 - 6.81M	—	—	350V	700V	
MF1D			D: ±100	—	—							
MF1E			E: ±25	47.5 - 1.0M	47.5 - 2.49M	47.5 - 4.64M	47.5 - 5.11M	—	—			
RK1/4D	0.25W	500V	D: ±100	—	—	—	3.09M - 25M	—	—	500V	700V	
RK1/4L			L: ±200	—	—	—	—	3.3M - 33M	3.3M - 33M			
RK1/4B			B: ±350	—	—	—	100k - 25M	100k - 33M	100k - 33M			
RK1/2D	0.50W	700V	D: ±100	—	—	—	5.11M - 33M	—	—	700V	1000V	
RK1/2L			L: ±200	—	—	—	—	6.2M - 33M	6.2M - 33M			
RK1/2B			B: ±350	—	—	—	100k - 35M	100k - 51M	100k - 51M			
RK1BC	1W	1000V	B: ±350	—	—	—	100k - 51M	100k - 100M	100k - 100M	1000V	1500V	
RK1/2G*	0.50W	700V	G: ±250	—	—	—	—	—	1M - 12M	350V	700V	

\* Discharge path resistor

## environmental applications

### Performance Characteristics


Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	Room temperature, +100°C, RK: +25°C/+125°C
Overload (Short Time)	RK: ±1%; RK1/2G: ±2.5% MF: ±0.5%	RK: ±0.6%; RK1/2G: ±1% MF: ±0.3%	Rated voltage x 2.5 or max. overload voltage for 5 seconds, whichever is less; MFS1/2: Rated voltage x 2 or max. overload voltage for 5 seconds, whichever is less
Resistance to Solder Heat	RK: ±1%; RK1/2G: ±5%; MFS: ±0.75%; MF1/4, MFS1/2, MF1/2: ±0.5%	RK: ±0.5%; RK1/2G: ±1% MFS1/4: ±0.4%; MF1/4, MFS1/2, MF1/2: ±0.25%	260°C ± 5°C, 10 seconds ± 1 second or 350°C ± 10°C, 3.5 seconds ± 0.5 second
Dielectric Withstanding Voltage	No breakdown	—	1 minute
Insulation Resistance	Not less than 10,000MΩ	—	100V, 1 minute
Rapid Change of Temperature	RK,MF: ±1%; RK1/2G: ±5%	MF: ±0.3%; RK: ±0.5%, RK1/2G: ±1%	-55°C (30 minutes), +155°C (30 minutes), 5 cycles
Moisture Resistance	RK: ±5%; RK1/2G: ±10%; MFS1/4: ±1.5%; MF1/4, MFS1/2, MF1/2: ±1%	RK: ±2%; RK1/2G: ±5%; MFS1/4: ±1%; MF1/4, MFS1/2, MF1/2: ±0.75%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	RK: ±5%; RK1/2G: ±10%; MFS1/4: ±1.5%; MF1/4, MFS1/2, MF1/2: ±1%	RK: ±2%; RK1/2G: ±5%; MFS1/4: ±1%; MF1/4, MFS1/2, MF1/2: ±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Resistance to Solvent	No abnormality in appearance. Marking shall be easily legible	—	The resistor shall be immersed for 5 seconds in IPA
Impulse	No such abnormalities as short-circuit, burnout, breakdown, etc.	—	Discharge from 1000pF capacitor 50 pulses. Internal 2.5 seconds. Charge voltage: 1.25kV (RK1/4), 2.5kV (RK1/2) and 6kV (RK1)

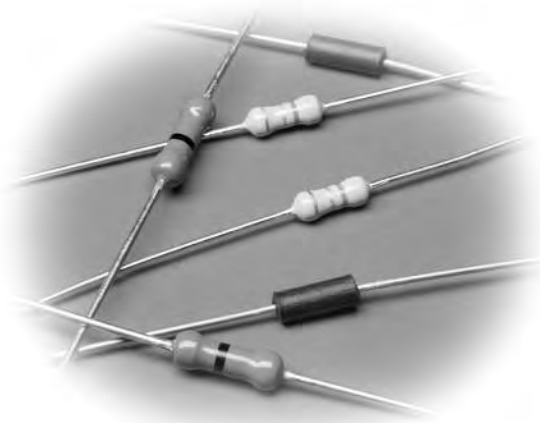

### features

- Type Z are conformal coated
- Type J are molded
- Suitable for automatic machine insertion
- Size compatible with 1/8, 1/4 and 1/2 watt resistors
- Marking: Type Z are tan color, single black band identifier  
Type J are black, no marking
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

### dimensions and construction

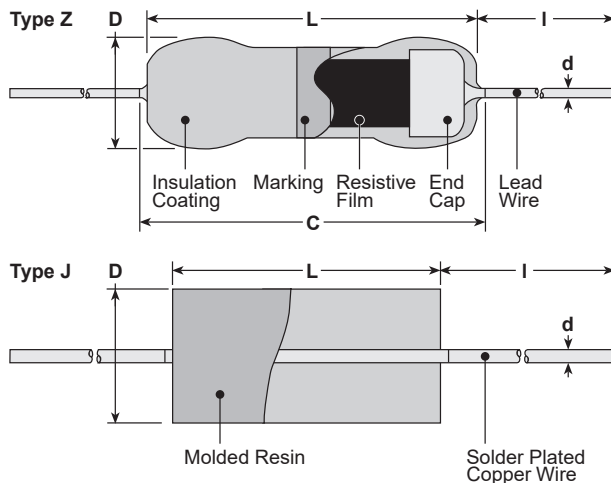

Type	Dimensions inches (mm)				I <sup>1</sup>	
	L (ref.) <sup>1</sup>	C (max.)	D	d (nom.)	Standard	Long
Z16	.126±.008 (3.2±0.2)	.134 (3.4)	.067 <sup>+0.008</sup> <sub>-.004</sub> (1.7 <sup>+0.2</sup> <sub>-.01</sub> )	.018 (0.45)	.551 Min. <sup>2</sup> (14.0 Min.)	.787 Min. <sup>3</sup> (20.0 Min.)
Z25	.240±.02 (6.1±0.5)	.280 (7.1)	.091±.012 (2.3±0.3)	.024 (0.6)	1.18 <sup>+1.18</sup> <sub>-.16</sub> (30.0 <sup>+3.0</sup> <sub>-.4.0</sub> )	
Z25Y	.228 (5.8)		.087 <sup>+0.016</sup> <sub>-.008</sub> (2.2 <sup>+0.4</sup> <sub>-.02</sub> )			
J1/6Z	.134 <sup>+0.004</sup> <sub>-.008</sub> (3.4 <sup>+0.1</sup> <sub>-.02</sub> )	—	.067±.008 (1.7±0.2)	.020 (0.5)	1.18±.118 (30.0±3.0)	—
J1/4Z	.256±.02 (6.5±0.5)	—	.091 <sup>+0</sup> <sub>-.012</sub> (2.3 <sup>+0</sup> <sub>-.03</sub> )	.024 (0.6)		

<sup>1</sup> Lead length changes depending on taping and forming type.

<sup>2</sup> Forming code S is applied for bulk type.

<sup>3</sup> Long type is custom-made.

### ordering information

<b>Z16</b>	<b>C</b>	<b>T52</b>	<b>A</b>
<b>Type</b>	<b>Termination Material</b>	<b>Taping and Forming</b>	<b>Packaging</b>
Z16 Z25 Z25Y J1/4Z J1/6Z	C: SnCu	T26, T52	A: Ammo R: Reel

For further information on packaging, please refer to Appendix C.


## applications and ratings

Part Designation	Maximum Amperage	Minimum Dielectric Withstanding Voltage	Resistance	Rated Ambient Temperature	Operating Temperature Range
Z16	1.5A	300V	20mΩ or less	+70°C	-55°C to +155°C
Z25	2.5A	500V			
Z25Y	15A	500V			

Part Designation	Maximum Allowable Current	Rated Ambient Temperature	Operating Temperature Range
J1/6ZC	8A	+70°C	-55°C to +125°C
J1/4ZC	10A		

## environmental applications


### Derating Curve

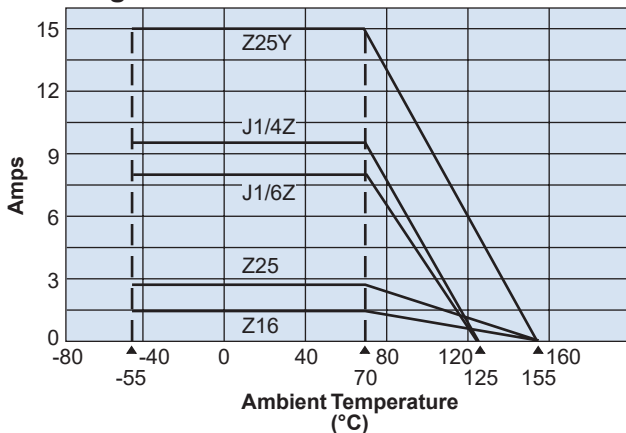

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

## Performance Characteristics

Parameter	Requirement	Test Method JIS C5201-1
Resistance	Less than 20mΩ	Measuring points are 10mm ± 1mm from the end cap
Resistance to Solder Heat		Terminal except 3mm shall be immersed in the solder, 350°C ± 5°C, 3.5 seconds ± 0.5 second
Solderability	90% coverage minimum	235°C ± 5°C, 2 seconds ± 0.5 second
Terminal Strength	No mechanical damages	(Direct Load) Z16: 5N, 30 seconds, Z25: 10N, 30 seconds (Twist Test) 360°, 5 times (Bending Test) 5N, 90°, 2 times (Z16: 2.5N)
Rapid Change of Temperature	Less than 20mΩ	-55°C (30 minutes)/+85°C (30 minutes), 5 cycles
Moisture Resistance		40°C ± 2°C, 90-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance @ 70°C		70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Solvent Resistance	No visible damages to protective coating and marking	Isopropyl alcohol with ultrasonic cleansing for 2 minutes Power: 0.3W/cm <sup>2</sup> , f: 28kHz, Temperature: 35°C ± 5°C

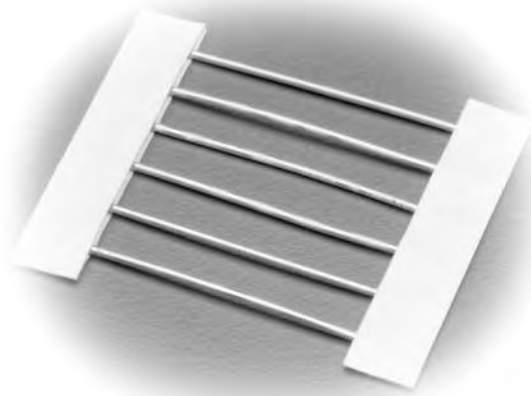


### features

- Suitable for automatic machine insertion
- No rating
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

leaded resistors

### dimensions and construction

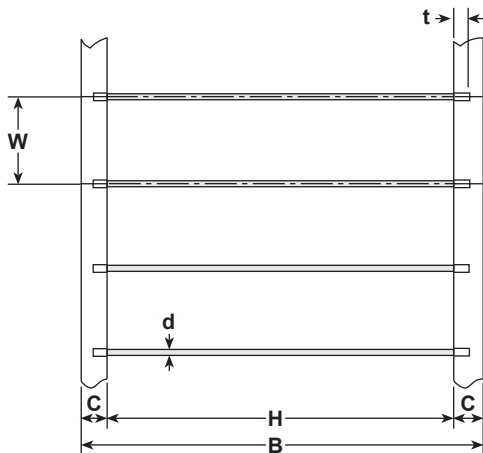

T52 Type	Dimensions inches (mm)					
	H	B	C	W	t (max.)	d nominal
JL5						.02 (0.5)
JL6	2.05±.039 (52.0±1.0)	2.56±.039 (65.0±1.0)	.244±.02 (6.2±0.5)	.2±.015 (5.08±0.38)	.098 (2.5)	.024 (0.6)
JL8						.031 (0.8)

T26 Type	Dimensions inches (mm)					
	H	B	C	W	t (max.)	d nominal
JL5						.02 (0.5)
JL6	1.02 <sup>+0.039</sup> <sub>-0</sub> (26.0 <sup>+1</sup> <sub>-0</sub> )	1.54±.039 (39.0±1.0)	.244±.02 (6.2±0.5)	.1972±.02 (5.0±0.5)	.098 (2.5)	.024 (0.6)
JL8						.031 (0.8)

### applications and ratings


Part Designation	Maximum Resistance	Maximum Current Ratings
JL5	10mΩ	8 Amps
JL6		10 Amps
JL8		12 Amps

### ordering information

JL	8	C	T52	A
Type	Nominal Diameter	Termination Material	Taping and Forming	Packaging
	5 (24 gauge) 6 (22 gauge) 8 (20 gauge)	C: SnCu (Other termination styles available, contact factory for options)	T26, T52	A: Ammo

For further information on packaging, please refer to Appendix C.



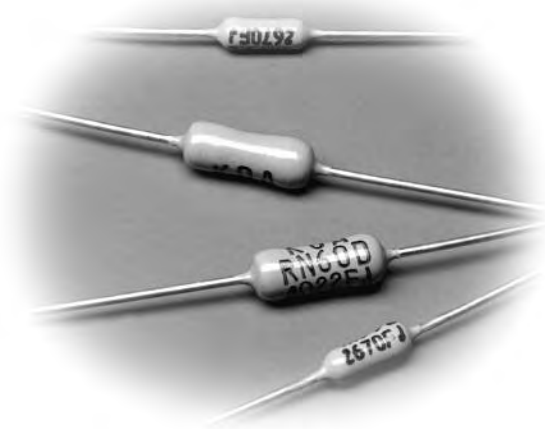


**features**

- Suitable for automatic machine insertion
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- AEC-Q200 Qualified: RNS1 only
- Excellent long term stability in resistance values

leaded resistors

**dimensions and construction**

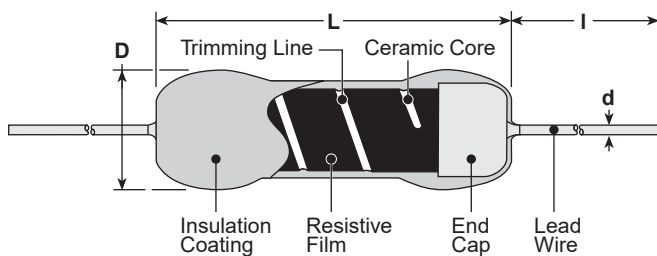

Type	Dimensions inches (mm)			
	L (ref.)	D	d	I*
RNS1/8	.250±.04 (6.35±1)	.091±.02 (2.3±0.5)	.024 (0.6)	1.496 (38)
RNS1/4	.374±.04 (9.5±1)	.138±.02 (3.5±0.5)		
RNS1/2	.531±.04 (13.5±1)	.138±.02 (3.5±0.5)		
RNS1	.610±.04 (15.5±1)	.216±.02 (5.5±0.5)		

\* Lead length changes depending on taping and forming type.

**ordering information**

<b>RNS</b>	<b>1/8</b>	<b>E</b>	<b>C</b>	<b>T52</b>	<b>R</b>	<b>1001</b>	<b>F</b>
Type	Power Rating	T.C.R.	Termination Material	Taping and Forming	Packaging	Nominal Resistance	Tolerance
	1/8: 0.125W 1/4: 0.25W 1/2: 0.5W 1: 1W	Y: ±5 T: ±10 E: ±25 C: ±50	C: SnCu	1/8: T26, T52 1/4, 1/2: T52 1: T521	A: Ammo R: Reel	3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	B: ±0.1% C: ±0.25% D: ±0.5% F: ±1.0%


For further information on packaging, please refer to Appendix C.

## applications and ratings


Part Designation	Power Rating	T.C.R. (ppm/°C) Max.	Resistance Range E-24, E-192 (B±0.1%)	Resistance Range E-24, E-192 (C±0.25%)	Resistance Range E-24, E-192 (D±0.5%)	Resistance Range E-24, E-96 (F±1.0%)	Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Minimum Dielectric Withstanding Voltage	Rated Ambient Temp.	Operating Temp. Range		
RNS1/8	0.125W	Y: ±5	100Ω - 100kΩ	100Ω - 100kΩ	100Ω - 100kΩ	100Ω - 100kΩ	200V	400V	500V	70°C	-25°C to +85°C		
		T: ±10	100Ω - 200kΩ	100Ω - 200kΩ	100Ω - 200kΩ	100Ω - 200kΩ							
		E: ±25	5.1Ω - 750kΩ	5.1Ω - 1.62MΩ	0.2Ω - 2MΩ	0.2Ω - 2MΩ							
		C: ±50	5.1Ω - 750kΩ	5.1Ω - 1.62MΩ	0.2Ω - 2MΩ	0.2Ω - 2MΩ							
RNS1/4	0.25W	E: ±25	5.1Ω - 1MΩ	5.1Ω - 2MΩ	0.2Ω - 2MΩ	0.2Ω - 2MΩ	250V	500V	700V	70°C	-55°C to +165°C		
		C: ±50	5.1Ω - 1.5MΩ	5.1Ω - 2MΩ	0.2Ω - 5.1MΩ	0.2Ω - 5.1MΩ							
RNS1/2	0.50W	E: ±25	5.1Ω - 1.5MΩ	5.1Ω - 2MΩ	0.2Ω - 2.4MΩ	0.2Ω - 4.7MΩ	300V	600V	700V			70°C	-55°C to +165°C
		C: ±50	5.1Ω - 2MΩ	5.1Ω - 2.4MΩ	0.2Ω - 5.1MΩ	0.2Ω - 5.1MΩ							
RNS1	1W	E: ±25	5.1Ω - 2MΩ	5.1Ω - 2.4MΩ	0.2Ω - 5.1MΩ	0.2Ω - 5.1MΩ	350V	700V	1000V	70°C	-55°C to +165°C		
		C: ±50	5.1Ω - 2.4MΩ	5.1Ω - 2.4MΩ	0.2Ω - 5.1MΩ	0.2Ω - 6.8MΩ							

## environmental applications

### Derating Curve

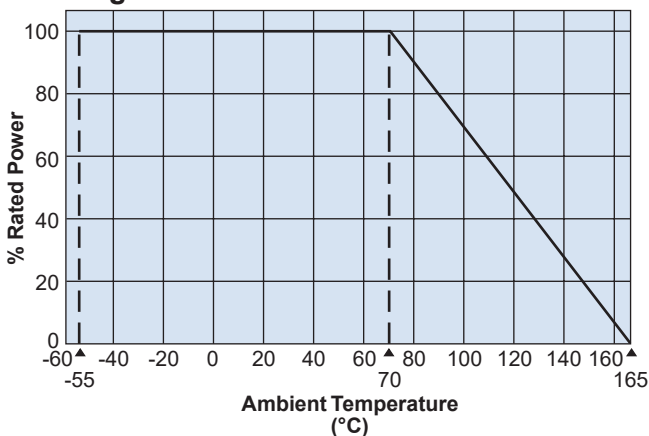


### Surface Temperature Rise

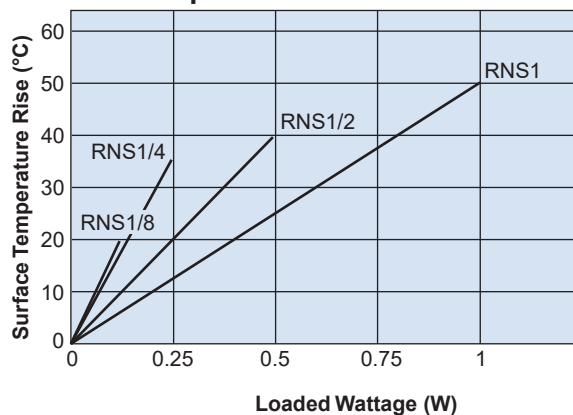

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	Y, T: +25°C/+65°C; E, C: +25°C/+125°C
Overload (Short time)	±0.25%	±0.15%	Rated voltage x 2.5 or max. overload voltage for 5 seconds, whichever is lower
Resistance to Solder Heat	±0.2%	±0.075%	350°C ± 10°C, 3.5 seconds ± 0.5 second
Rapid Change of Temperature	±0.2%	±0.075%	-55°C (30 minutes), +85°C (30 minutes), 5 cycles
Moisture Resistance	±0.75%	±0.5%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±0.5%	±0.35%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle

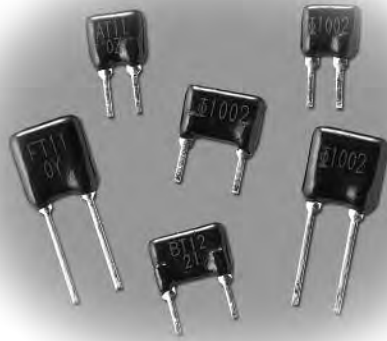


### features

- Ultra precision T.C.R. up to  $\pm 2.5$  ppm/ $^{\circ}\text{C}$ , tolerance to  $\pm 0.01\%$
- Wide resistance range from  $10\Omega$  to  $1\text{M}\Omega$
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

Leadless resistors

### dimensions and construction

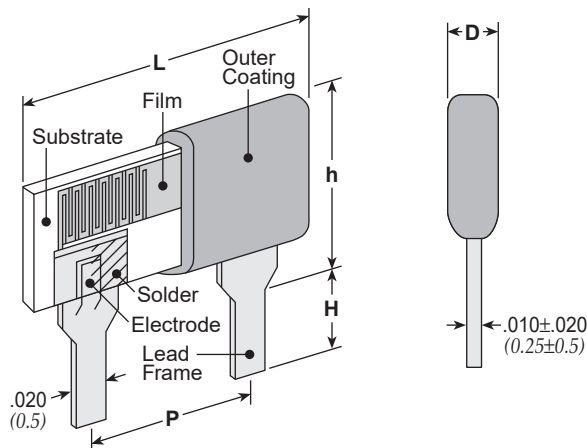

Type	Dimensions inches (mm)				
	L (max.)	D (max.)	P	H	h (max.)
MRS1/8	.220 (5.6)	.098 (2.5)	.100 $\pm$ .008 (2.54 $\pm$ 0.2)	.118 $\pm$ .02 (3.0 $\pm$ 0.5)	.244 (6.2)
MRS1/4	.295 (7.5)		.200 $\pm$ .008 (5.08 $\pm$ 0.2)		
MRS1/3			.150 $\pm$ .008 (3.81 $\pm$ 0.2)	.315 $\pm$ .079 (8.0 $\pm$ 2.0)	.354 (9.0)

### ordering information

Lead Free

<b>MRS</b> Product Code	<b>1/3</b> Size 1/8: 0.125W 1/4: 0.25W 1/3: 0.3W	<b>S</b> T.C.R. (ppm) S: $\pm 2.5$ Y: $\pm 5$ T: $\pm 10$ E: $\pm 25$	<b>D</b> Terminal Surface Material D: SnAgCu	<b>1002</b> Nominal Resistance 3 significant figures + 1 multiplier "R" indicates decimal on values <100 $\Omega$	<b>T</b> Resistance Tolerance T: $\pm 0.01\%$ Q: $\pm 0.02\%$ A: $\pm 0.05\%$ B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$
----------------------------	--	--	--	--	--


### applications and ratings

Type	Power Rating	T.C.R. (ppm/°C) Max.	Resistance Range (Ω)						Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Rated Ambient Temperature	Operating Temperature Range
			T: ±0.01% E96	Q: ±0.02% E96	A: ±0.05%	B: ±0.1%	C: ±0.25%	D: ±0.5%				
MRS1/8	0.125W	Y: ±5	—	—	100-250k	100-250k	100-250k	100-250k	200V	400	+70°C	-55°C to +125°C
		T: ±10	—	—	100-250k	100-510k	30-510k	30-510k				
		E: ±25	—	—	100-250k	100-510k	10-510k	10-510k				
MRS1/4	0.25W	Y: ±5	—	—	100-510k	100-510k	100-510k	100-510k	250V	500		
		T: ±10	—	—	100-510k	100-1M	30-1M	30-1M				
		E: ±25	—	—	100-510k	100-1M	10-1M	10-1M				
MRS1/3	0.3W	S: ±2.5	100-100k	30.1-100k	30.1-100k	30.1-100k	—	—	200V	500		
		Y: ±5	100-100k	30.1-100k	10-100k	10-100k	—	—				
		T: ±10	100-100k	30.1-100k	10-100k	10-100k	—	—				

\* MRS1/3 is available only in E96 series.


### environmental applications

#### Derating Curve

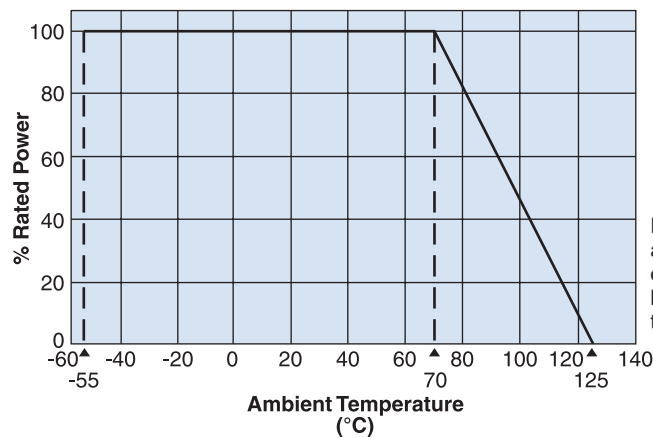

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with this derating curve.

#### Surface Temperature Rise

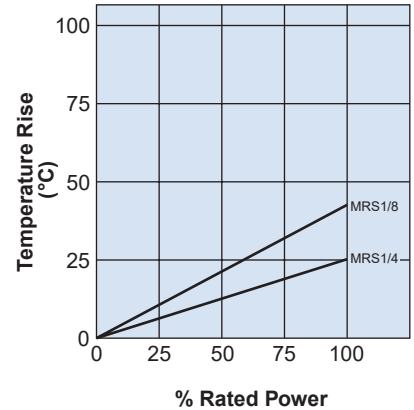

### Performance Characteristics

Parameter	Requirement Δ R ±(% + 0.05Ω)	Test Method
Resistance	Within specified tolerance	25°C
T.C.R.	Within specified T.C.R.	+25°C/+65°C
Overload (Short time)	±0.05%	Rated voltage x 2.5 or max. overload voltage whichever is lower, for 5 seconds
Resistance to Soldering Heat	±0.1%: MRS1/8, 1/4 ±0.05%: MRS1/3	350°C ± 10°C, 3.5 seconds ± 0.5 second
Rapid Change of Temperature	±0.1%: MRS1/8, 1/4 ±0.05%: MRS1/3	MRS1/8, 1/4: -55 +0-5°C (30 minutes), +125 +3-0°C (30 minutes), 5 cycles MRS1/3: -55 +0-5°C (30 minutes), +125 +3-0°C (30 minutes), 50 cycles
Dielectric Withstanding Voltage	±0.5%: MRS1/8, 1/4 ±0.05%: MRS1/3	500V (a.c.) for 1 minute between terminals and coatings
Endurance at 70°C	±0.1%: MRS1/8, 1/4 ±0.05%: MRS1/3	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Moisture Resistance	±0.1%: MRS1/8, 1/4 ±0.05%: MRS1/3	40°C ± 2°C, 90 ~ 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Insulation Resistance	10,000MΩ and more	500V (d.c.) for 1 minute
Resistance to Solvent	No abnormality in appearance. Marking shall be easily legible.	Soaking in 2-propanol of +20°C~25°C for 180 seconds ± 10 seconds


## anti-surge power type leaded resistor



### features

- Excellent anti-surge characteristics
- Stable characteristics of moisture resistance up to high resistance range
- RCR50 +(1MΩ - 12MΩ), RCR50EN (1MΩ - 12MΩ) and RCR60 (1MΩ - 12MΩ) are discharge resistors recognized by UL1676 and c-UL(CSA-C22.2 No.1-M94)
- RCR25EN (100kΩ~33MΩ), RCR50EN (100kΩ - 33MΩ) and RCR60 (100kΩ - 56MΩ) is approved by EN6234-68-1 G.10 safety
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- Surface mount style "N" forming is suitable for automatic mounting

### dimensions and construction

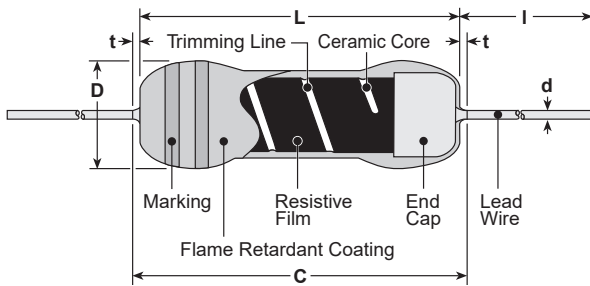

\* Lead length changes depending on taping and forming.

Type	Dimensions inches (mm)					
	L	C (max.)	t (max.)	D	d (nom.)	I*
RCR16	.126±.008 (3.2±0.2)	.134 (3.4)	—	.067 <sup>+0.08</sup> <sub>-.004</sub> (1.7 <sup>+0.2</sup> <sub>-.01</sub> )	.018 (0.45)	.787 Min. (20.0 Min.)
RCR25 RCR25EN	.248±.02 (6.3±0.5)	.28 (7.1)	—	.098±.02 (2.5±0.5)	.024 (0.6)	
RCR50(+) RCR50EN	.374±.039 (9.5±1.0)	—	.118 (3.0)	.138±.016 (3.5±0.4)	.028 (0.7)	
RCR60	.374 <sup>+0.039</sup> <sub>-.004</sub> (9.5 <sup>+1.0</sup> <sub>-.02</sub> )	—	.118 (3.0)	.157±.02 (4.0±0.5)	.031 (0.8)	
RCR75	.472±.039 (12±1.0)	—	.118 (3.0)	.236 <sup>+0.039</sup> <sub>-.016</sub> (6.0 <sup>+1.0</sup> <sub>-.04</sub> )	.031 (0.8)	
RCR100	.610±.039 (15.5±1.0)	—	.118 (3.0)	.236 <sup>+0.039</sup> <sub>-.016</sub> (6.0 <sup>+1.0</sup> <sub>-.04</sub> )	.031 (0.8)	

### ordering information

RCR	50	EN	C	T52	A	105	J
Type	Power Rating	Safety Appr. Marking	Termination Material	Taping and Forming	Packaging	Nominal Resistance	Tolerance
RCR	16: 0.25W 25: 0.25W 50: 0.5W 60: 1W 75: 2W 100: 3W	RCR50+: + RCR25EN, RCR50EN: EN Blank: Others	C: SnCu	RCR16: T26, T52 RCR25, RCR25EN: T26, T52 RCR50(+), EN): T52 RCR60: T52 RCR75: T52 RCR100: T521, T631 L, M, N Forming	A: Ammo R: Reel TEB: Plastic embossed: N forming	2 significant figures + 1 multiplier for ±5% 3 significant figures + 1 multiplier for ±1%	F: ±1% J: ±5%

### applications and ratings

Part Designation	Power Rating @ 70°C	Minimum Dielectric Withstanding Voltage	Resistance Range E-24, E-96 (F±1%)	Resistance Range E-24 (J±5%)	Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temperature Range
RCR16	0.25W	300V	100kΩ - 5.1MΩ	100kΩ - 5.1MΩ	500V	1000V	-55°C to +155°C
RCR25 RCR25EN		700V	100kΩ - 9.1MΩ	100kΩ - 33MΩ	DC 1600V AC 1150V	DC 2000V AC 1500V	
RCR50	3.3Ω - 910kΩ		3.3Ω - 910kΩ	2000V	2500V		
RCR50+	1MΩ - 9.1MΩ		1MΩ - 12MΩ				
RCR50EN	100kΩ - 9.1MΩ		100kΩ - 33MΩ				
RCR60	1.0W		100kΩ - 9.1MΩ	100kΩ - 56MΩ	4000V	5000V	
RCR75	2.0W		100kΩ - 9.1MΩ	100kΩ - 100MΩ	5000V		
RCR100	3.0W	1000V	100kΩ - 9.1MΩ	100kΩ - 51MΩ			


For further information on packaging, please refer to Appendix C.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/29/18

## environmental applications

### Derating Curve

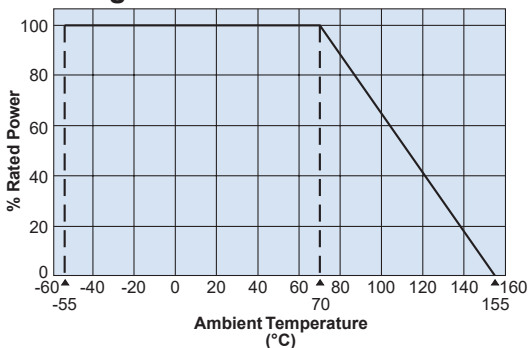


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

### Notice of Surge Load

Surge withstanding load voltage for the resistors cannot be guaranteed when the undermentioned 4 items get to a remarkable overload in comparison with the conditions shown by surge withstanding voltage in Anti-surge characteristics. Please contact KOA in advance if such a case is anticipated.

1. Peak voltage to be applied
2. Pulse width
3. Conditions of protecting insulation around the resistor
4. Situation of proximity conductivity object



For example: In the figure, a metal wire is placed less than 5mm away from the resistor body, there is such a case that causes an electric discharge by a surge load 10kV and then destroys the outer coating.

### Approvals Awarded

Type	UL1676 & c-UL (CSA-C22.2 No.1-M94)	EN60065 14.1 Test a	EN60065 14.1 Test b	EN62368-1 G.10
RCR25EN	—	—	○	○
RCR50+	—	—	—	—
RCR50EN	○(1MΩ~12MΩ)	○	○	○
RCR60	—	○	○	○

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\% + 0.05\%)$			Typical	Test Method																		
	Limit																						
Resistance	Within regulated tolerance			—	Measuring points are 10mm $\pm$ 1mm from the end cap																		
T.C.R.	Type	T.C.R.	Resistance Range	—	+25°C/+125°C																		
	RCR16	$\pm 200$ ppm/°C	100kΩ - 5.1MΩ																				
	RCR25 (EN)	$\pm 350$ ppm/°C	100kΩ - 33MΩ																				
	RCR50 (+)	$\pm 500$ ppm/°C	3.3Ω - 91kΩ																				
		$\pm 350$ ppm/°C	100kΩ - 33MΩ																				
	RCR50EN	$\pm 350$ ppm/°C	100kΩ - 33MΩ																				
	RCR60	$\pm 350$ ppm/°C	100kΩ - 56MΩ																				
	RCR75	$\pm 350$ ppm/°C	100kΩ - 100MΩ																				
RCR100	$\pm 200$ ppm/°C	100kΩ - 51MΩ																					
Overload	1%			0.5%	Rated voltage x 2.5 or maximum overload voltage for 5 seconds, whichever is less																		
Resistance to Solder Heat	1%			0.5%	260°C $\pm$ 5°C, 10 seconds $\pm$ 1 second or 350°C $\pm$ 10°C, 3.5 seconds $\pm$ 0.5 seconds																		
Terminal Strength	No mechanical damage			—	Twist 360°, 5 times																		
Rapid Change of Temperature	1%			0.5%	-55°C (30 minutes)/+155°C (30 minutes), 5 cycles																		
Moisture Resistance	5%			2.5%	40°C $\pm$ 2°C, 90-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle RCR16, 25, 50 (+), 60: W; RCR75, 100: Wx0.1																		
Endurance @ 70°C	5%			2.5%	70°C $\pm$ 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle																		
Resistance to Solvent	No visible damage to protective coating and marking			—	Isopropyl alcohol with ultrasonic washing, 2 minutes Power: 0.3W/cm <sup>2</sup> , f: 28kHz, Temperature: 35°C $\pm$ 5°C																		
Surge Withstanding	10%			2.5%	Discharge test: 2kV - 10kV, 0.01μF capacitor discharge pulse, 10 times (1 pulse/5 seconds maximum) <table border="1" style="margin-top: 10px;"> <thead> <tr> <th>Type</th> <th>RCR16</th> <th>RCR25 RCR25EN</th> <th>RCR50, RCR50+</th> <th>RCR50EN, RCR60, RCR75, RCR100</th> </tr> </thead> <tbody> <tr> <td rowspan="4">Applied Voltage</td> <td rowspan="4">2kV</td> <td rowspan="4">3kV</td> <td>3.3Ω - 6.2Ω: 10kV</td> <td rowspan="4">10kV</td> </tr> <tr> <td>6.8Ω - 10Ω: 7kV</td> </tr> <tr> <td>11Ω - 9.1kΩ: 5kV</td> </tr> <tr> <td>10kΩ - 91kΩ: 7kV</td> </tr> <tr> <td></td> <td></td> <td></td> <td>100kΩ - 33MΩ: 10kV</td> <td></td> </tr> </tbody> </table>	Type	RCR16	RCR25 RCR25EN	RCR50, RCR50+	RCR50EN, RCR60, RCR75, RCR100	Applied Voltage	2kV	3kV	3.3Ω - 6.2Ω: 10kV	10kV	6.8Ω - 10Ω: 7kV	11Ω - 9.1kΩ: 5kV	10kΩ - 91kΩ: 7kV				100kΩ - 33MΩ: 10kV	
	Type	RCR16	RCR25 RCR25EN			RCR50, RCR50+	RCR50EN, RCR60, RCR75, RCR100																
Applied Voltage	2kV	3kV	3.3Ω - 6.2Ω: 10kV	10kV																			
			6.8Ω - 10Ω: 7kV																				
			11Ω - 9.1kΩ: 5kV																				
			10kΩ - 91kΩ: 7kV																				
			100kΩ - 33MΩ: 10kV																				
EN60065 Test (RCR50EN, RCR60 only)			20%	—	Discharge test: 10kV, 1000pF capacitor discharge pulse, 50 times (1 pulse/5 seconds maximum)																		

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


10/29/18



**features**


- Miniature construction can endure to high voltage and high power
- Excellent in anti-surge characteristics
- Wide resistance range of 0.5MΩ - 10GΩ and small T.C.R.
- Product meets EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in resistor element and brass cap.

**dimensions and construction**

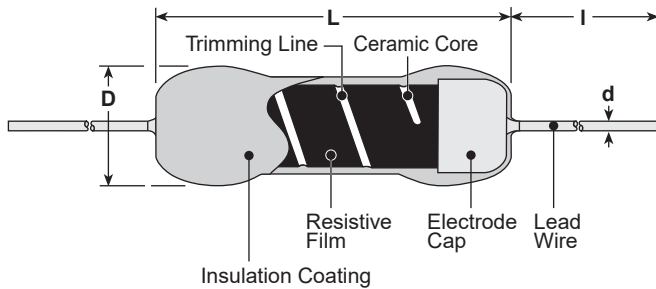


Type	Dimensions inches (mm)			
	L	D	d (Nominal)	l
GS 1/4	.248±.039 (6.3±1.0)	.091±.020 (2.3±0.5)	.026 (0.65)	1.50±.118 (38.0±3.0)
GS 1/2	.374±.039 (9.5±1.0)	.138±.024 (3.5±0.6)	.031 (0.8)	
GS 1	.591±.059 (15.0±1.5)	.177±.039 (4.5±1.0)		
GS 2	.945±.059 (24.0±1.5)	.311±.039 (7.9±1.0)	.039 (1.0)	1.50±.118 (38.0±3.0)
GS 3	2.05±.079 (52.0±2.0)			
GS 5	2.99±.079 (76.0±2.0)			
GS 7	3.82±.118 (97.0±3.0)			
GS 10	4.61±.118 (117.0±3.0)			
GS 12	5.39±.118 (137.0±3.0)			

**Derating Curve**

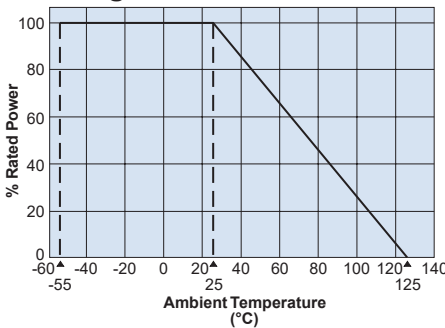

For resistors operated at an ambient temperature of 25°C or above, a power rating shall be derated in accordance with the above derating curve.

**Surface Temperature Rise**

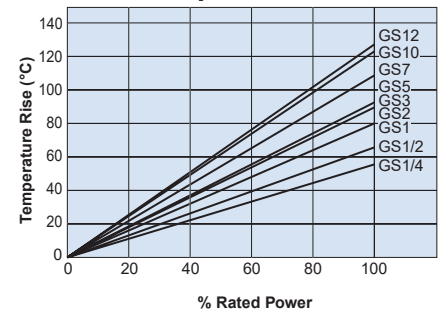

**ordering information**

<b>GS</b>	<b>1/2</b>	<b>L</b>	<b>C</b>	<b>106</b>	<b>J</b>
Type	Power Rating	T.C.R.	Termination Surface Material	Nominal Resistance	Resistance Tolerance
	1/4: 0.25W 1/2: 0.5W 1: 1W 2: 2W 3: 3W 5: 5W 7: 7W 10: 10W 12: 12W	D: ±100 L: ±200  Packaging Quantity: GS1/4: 1000 pieces GS1/2, GS1: 2000 pieces GS2, GS3, GS5: 500 pieces GS7, GS10, GS12: 250 pieces Custom forming for all sizes and custom taping for GS1/4 - GS1/2 are available upon request.	C: SnCu	±2%, ±5%, ±10%: 2 significant figures + 1 multiplier ±0.5%, ±1%: 3 significant figures + 1 multiplier	D: ±0.5% F: ±1% G: ±2% J: ±5% K: ±10%

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

4/15/15

leaded resistors

## applications and ratings

Part Designation	Power Rating	T.C.R. (ppm/°C) Max.	Resistance Range (Ω)					Max. Working Voltage	Max. Overload Voltage	Impulse Withstand Voltage	Rated Ambient Temperature	Operating Temperature Range		
			E-24 & 25, 50x10 <sup>n</sup>											
			(D±0.5%)	(F±1%)	(G±2%)	(J±5%)	(K±10%)							
GS1/4*	0.25W	D: ±100	500K-20M	500K-100M	500K-100M	500K-100M	500K-100M	0.5kV	1kV	1.25kV	+25°C	-55°C to +125°C		
		L: ±200			500K-200M	500K-200M	500K-200M							
GS1/2*	0.5W	D: ±100			500K-500M	500K-500M	500K-500M	1kV	2kV	2.5kV				
		L: ±200			500K-500M	500K-500M	500K-500M							
GS1	1W	D: ±100			500K-50M	500K-100M	500K-500M	500K-500M	500K-500M	3kV			4.5kV	6kV
		L: ±200					500K-1G	500K-5G	500K-5G					
GS2	2W	D: ±100					500K-500M	500K-500M	500K-500M	5kV			7.5kV	10kV
		L: ±200					500K-1G	500K-5G	500K-5G					
GS3	3W	D: ±100					500K-500M	500K-500M	500K-500M	15kV			20kV	30kV
		L: ±200					500K-1G	500K-10G	500K-10G					
GS5	5W	D: ±100					500K-500M	500K-500M	500K-500M	20kV			30kV	40kV
		L: ±200					500K-1G	500K-10G	500K-10G					
GS7	7W	D: ±100	1M-50M	1M-100M			1M-500M	1M-500M	1M-500M	30kV	40kV	50kV		
		L: ±200	500K-50M	500K-100M			500K-1G	500K-10G	500K-10G					
GS10	10W	D: ±100	1M-50M	1M-100M			1M-500M	1M-500M	1M-500M	35kV	50kV	60kV		
		L: ±200	500K-50M	500K-100M			500K-1G	500K-10G	500K-10G					
GS12	12W	D: ±100	1M-50M	1M-100M	1M-500M	1M-500M	1M-500M	40kV	60kV	70kV				
		L: ±200	500K-50M	500K-100M	500K-1G	500K-10G	500K-10G							

\* Taping packaging is available for GS1/4 and GS1/2. Please contact factory.

## environmental applications

### Performance Characteristics


Parameter	Requirement Δ R ±%	Test Method
Resistance	Within regulated tolerance	25°C
T.C.R.	Within specified T.C.R.	+25°C/125°C
Overload (Short time)	2%: TCR 200x10 <sup>-6</sup> /K 0.5%: TCR 100x10 <sup>-6</sup> /K	Rated voltage x 2.5 (GS1/4, GS1/2), rated voltage x 2 (GS1-GS12) or Max. overload voltage, whichever is lower for 5 seconds
Resistance to Solder Heat	2%: TCR 200x10 <sup>-6</sup> /K 0.5%: TCR 100x10 <sup>-6</sup> /K	350°C ± 10°C, 3 seconds ± 0.5 seconds or 260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	2%: TCR 200x10 <sup>-6</sup> /K 0.5%: TCR 100x10 <sup>-6</sup> /K	-55°C (30 minutes)/ +125°C (30 minutes), 5 cycles
Moisture Resistance	5%: TCR 200x10 <sup>-6</sup> /K 2%: TCR 100x10 <sup>-6</sup> /K	40°C, 90% - 95%RH, 1000h
Endurance @ 25°C	3%: TCR 200x10 <sup>-6</sup> /K 2%: TCR 100x10 <sup>-6</sup> /K	25°C, 1000 hours 1.5 hr ON/0.5 hr OFF cycle
Voltage Coefficient	±50x10 <sup>-6</sup> /V: TCR 200x10 <sup>-6</sup> /K ±10x10 <sup>-6</sup> /V: TCR 100x10 <sup>-6</sup> /K	GS1/4, 1/2 only, Rated voltage or max. working voltage, whichever is lower and 1/10 of its voltage
Voltage Characteristics	5%: TCR 200x10 <sup>-6</sup> /K 3%: TCR 100x10 <sup>-6</sup> /K	GS1 - 12, Rated voltage or max. working voltage, whichever is lower and 1/10 of its voltage
Resistance to Solvent	No evidence of damage to protective coating and marking	Soaking in IPA for 1 minute and brushing 10 times -3 cycles - liquid temperature 25°C ±5°C
Impulse Withstand Voltage	No abnormality in appearance and flash-over	An impulse voltage shall be applied 5 times at an interval of 1 minute

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


4/15/15

**features**

- High resistance resistors for high voltage circuits
- Thin SIP shape
- The flame retardant coats corresponding to UL94V-0 are used
- Thick film resistors (RuO<sub>2</sub>) ensure high stabilities in life and change in aging
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

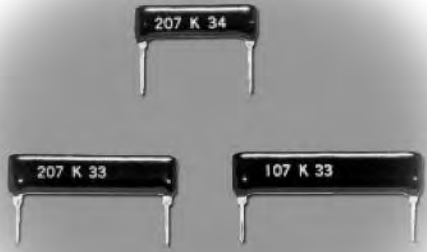

**dimensions and construction**

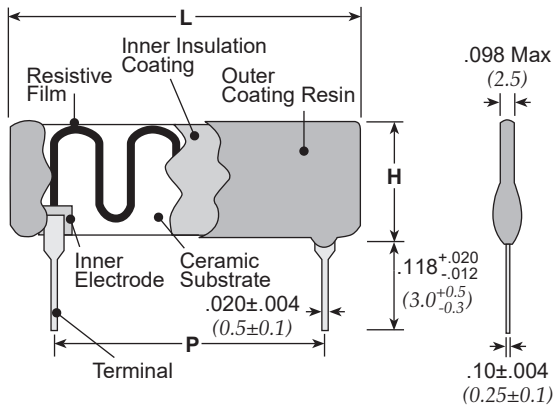

Type	Max. Working Voltage Symbol	Dimensions inches (mm)			
		L (Max.)	H (Max.)	P	
4L	Nil	.500 (12.7)	.200 (5.08)	.4±.008 (10.16±0.2)	
5L	Nil	.602 (15.3)		.5±.008 (12.7±0.2)	
6L	Nil	.701 (17.8)		.6±.008 (15.24±0.2)	
3C	Nil or 4	.425 (10.8)	.256 (6.5)	.3±.008 (7.62±0.2)	
4C	5	.524 (13.3)		.4±.008 (10.16±0.2)	
5C	Nil or 6	.622 (15.8)		.5±.008 (12.7±0.2)	
6C	7	.724 (18.4)		.6±.008 (15.24±0.2)	
7C	Nil or 8	.823 (20.9)		.7±.008 (17.78±0.2)	
8C	Nil or 9	.925 (23.5)		.8±.008 (20.32±0.2)	
9C	Nil	1.02 (26.0)		.9±.008 (22.86±0.2)	
11X	Nil	1.22 (31.0)		.394 (10.0)	1.1±.008 (27.94±0.2)
18X	Nil	1.93 (48.9)			1.8±.008 (45.72±0.2)
<b>NEW</b> 18D	Nil	1.93 (48.9)	.520 (13.2)		1.8±.008 (45.72±0.2)

**ordering information**

RK92	-	3C	4	D	1004	F	50
Type		Style	Max. Working Voltage Symbol	Termination Surface Material	Nominal Resistance	Resistance Tolerance	T.C.R. (X10 <sup>-6</sup> /K)
RK92 (Standard)		4L 5L 6L 3C 5C 7C 8C 9C 11X 18X	Nil	D: SnAgCu (L: Sn/Pb)	F: 4 digits G, J, K, M: 3 digits	F: ±1% G: ±2% J: ±5% K: ±10% M: ±20%	Nil
RK92 (Precision)		<b>NEW</b> 18D 18D 3C 4C 5C 6C 7C 8C	Nil 4 (kV) 5 (kV) 6 (kV) 7 (kV) 8 (kV) 9 (kV)	D: SnAgCu	D, F: 4 digits	D: ±0.5% F: ±1%	100 100 50

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/19/17


## applications and ratings

Part Designation	Max. Working Voltage Symbol	Power Rating	Resistance Range (Ω) E-12 • 2x10 <sup>n</sup> • 3x10 <sup>n</sup> • 4x10 <sup>n</sup> • 5x10 <sup>n</sup>						T.C.R. (ppm/°C) Max.	Maximum Working Voltage	Rated Ambient Temp.	Operating Temp. Range
			D: ±0.5%	F: ±1%	G: ±2%	J: ±5%	K: ±10%	M: ±20%				
4L	Nil	0.5W	—	2M - 10M	2M - 10M	—	—	—	±300	+70°C	-25°C to +125°C	
5L	Nil	0.5W	—	1M - 500M	1M - 500M	1M - 1G	1M - 1G	1M - 1G				
6L	Nil	0.6W	—	1M - 500M	1M - 500M	1M - 1G	1M - 1G	1M - 1G				
3C	Nil	0.5W	—	1M - 500M	1M - 500M	1M - 1G	1M - 1G	1M - 1G				
5C	Nil	0.75W	—	1M - 500M	1M - 500M	1M - 1G	1M - 1G	1M - 1G				
7C	Nil	0.85W	—	1M - 500M	1M - 500M	1M - 1G	1M - 1G	1M - 1G				
8C	Nil	1.0W	—	1M - 500M	1M - 500M	1M - 1G	1M - 1G	1M - 1G				
9C	Nil	1.1W	—	1M - 500M	1M - 500M	1M - 1G	1M - 1G	1M - 1G				
11X	Nil	1.7W	—	1M - 500M	1M - 500M	1M - 1G	1M - 1G	1M - 1G				
18X	Nil	2.7W	—	1M - 500M	1M - 500M	1M - 1G	1M - 1G	1M - 1G				
<b>NEW</b> 18D	Nil	4W	1M - 100M	1M - 500M	1M - 500M	1M - 1G	1M - 1G	1M - 1G	±100	15kV		
3C	4	0.5W	1M - 100M	1M - 100M	—	—	—	—	±50	4kV		
4C	5	0.6W	1M - 100M	1M - 100M	—	—	—	—		5kV		
5C	6	0.75W	1M - 150M	1M - 150M	—	—	—	—		6kV		
6C	7	0.8W	1M - 150M	1M - 150M	—	—	—	—		7kV		
7C	8	0.85W	1M - 200M	1M - 200M	—	—	—	—		8kV		
8C	9	1W	1M - 200M	1M - 200M	—	—	—	—		9kV		

Rated voltage =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$  or Max. working voltage, whichever is lower  
Please contact factory for other values that are not listed above.

## environmental applications


### Derating Curve

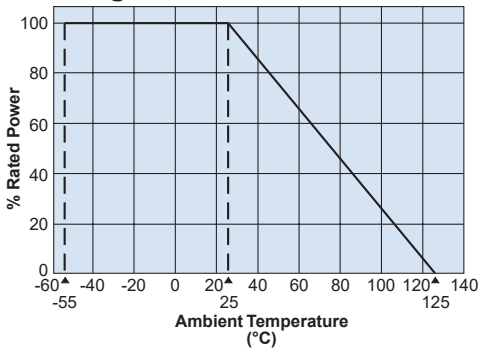

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

## 3 Terminal Product

### Circuit Schematics



## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified tolerance	—	+25°C/+125°C
Resistance to Solder Heat	1%	0.5%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	1%	0.5%	-25°C (30 minutes) / +125°C (30 minutes) 5 cycles
Moisture Resistance	5%	3%	40°C ± 2°C, 90 - 95% RH, 1000 hours,
Endurance @ 70°C	5%	3%	Room temperature 1000 hours, Rated voltage

**NEW**




## features

- Resistors excellent in overload capability
- Thin SIP shape
- Thick film resistors (RuO<sub>2</sub>) ensure high stabilities in life and change in aging
- Meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

Leaded resistors

## dimensions and construction

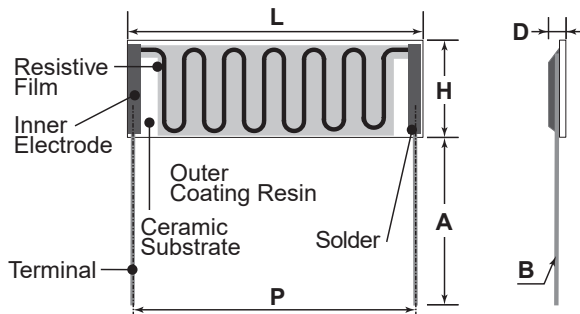

Type	Dimensions inches (mm)					
	L (Max.)	H (Max.)	P	D (Max.)	A	øB (Nom.)
18FL	1.91 (48.5)	.650 (16.5)	1.77±.039 (45.0±1.0)	.098 (2.5)	1.18±.039 (30.0±1.0)	.026 (0.65)

## ordering information

<b>RK92</b>	-	<b>18FL</b>	<b>4W</b>	<b>D</b>	<b>305</b>	<b>K</b>
Type		Style	Power Rating	Termination Material	Nominal Resistance	Resistance Tolerance
RK92		18FL	4W	D: SnAgCu	3 Digits	K: ±10%


## applications and ratings

Part Designation	Power Rating	Resistance Range ( $\Omega$ ) K: $\pm 10\%$	T.C.R. ( $\times 10^{-6}/K$ )	Rated Ambient Temperature	Operating Temperature Range
18FL	4W	1.2M ~ 16M (1.2M, 3M, 4M, 5M, 8M, 12M, 16M)	$\pm 300$	+70°C	-40°C to +90°C

Rated voltage =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$

## environmental applications

### Derating Curve

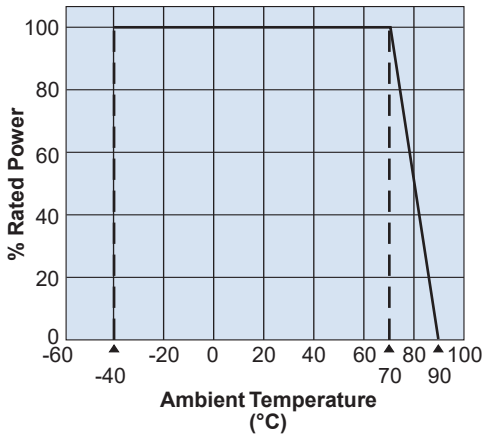


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Temperature Cycling	2%	1.0%	-25°C (30 minutes)/ +125°C (30 minutes) 5 cycles
Endurance	3%	1.5%	Insulating oil 1000 hours, Rated voltage



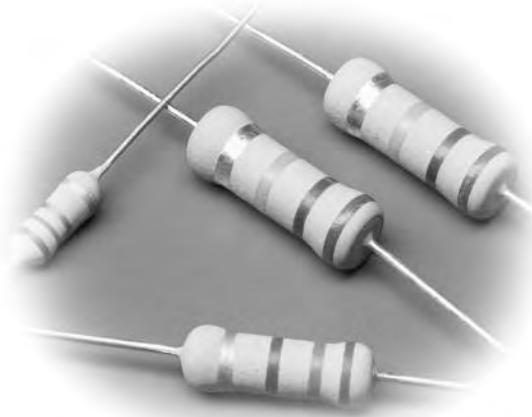


### features

- KOA original bulk ceramic resistors
- Coated with UL94V0 flameproof material
- Excellent in anti-pulse characteristics
- Non-inductive resistors
- Products with lead-free terminations meet EU RoHS requirements. RoHS regulation is not intended for Pb-glass contained in the electrode.
- Higher reliability against disconnection compared to wirewound resistors and film resistors
- AEC-Q200 Qualified

Leaded resistors

### dimensions and construction

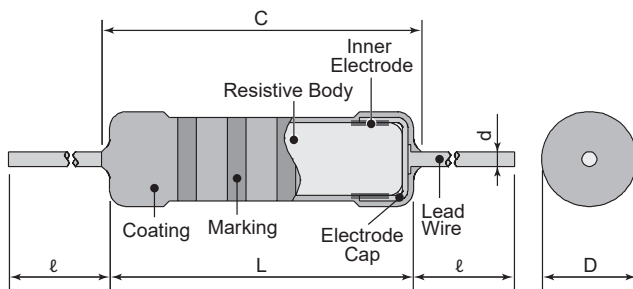

Type	Dimensions inches (mm)				
	L	C (max.)	D	d (nom.)	I*
PCF1/2	.354±.039 (9.0±1.0)	.437 (11.1)	.138±.02 (3.5±0.5)	.028 (0.7)	1.18±.118 (30.0±3.0)
PCF1	0.65±.039 (16.5±1.0)	.748 (19.0)	.217±.039 (5.5±1.0)	.031 (0.8)	1.50±.118 (38.0±3.0)
PCF2	.748±.039 (19.0±1.0)	.886 (22.5)	.276±.039 (7.0±1.0)		


\* Lead length changes depending on taping type

### ordering information

<b>PCF</b>	<b>1</b>	<b>C</b>	<b>T631</b>	<b>R</b>	<b>103</b>	<b>K</b>
Type	Power Rating	Termination Material	Taping	Packaging	Nominal Resistance	Tolerance
PCF	1/2: 0.5W 1: 1W 2: 2W	C: SnCu	1/2: T52 1: T631 2: T631	R: Reel	2 significant figures + 1 multiplier	K: ±10% M: ±20%

### taping

Type	Axial Taping	
	T52	T631
PCF1/2	○	—
PCF1	—	○
PCF2	—	○



Contact us for lead forming details.

For further information on packaging, please refer to Appendix C.


## applications and ratings

Part Designation	Power Rating @ 70°C	Resistance Range (Ω)		T.C.R. (x10 <sup>-6</sup> /K)	Maximum Working Voltage	Maximum Overload Voltage	Dielectric Withstanding Voltage	Rated Ambient Temp.	Operating Temp. Range
		K: ±10% E-12	M: ±20% E-6						
PCF1/2	0.5W	4.7 - 100K	4.7 - 100K	-500 ~ -1300: 3.3Ω≤R<10Ω -600 ~ -1500: 10Ω≤R<100Ω	200V	400V	500V	+70°C	-40°C to +200°C
PCF1	1.0W	3.3 - 390K	3.3 - 390K	-700 ~ -1800: 100Ω≤R<1kΩ -900 ~ -1900: 1kΩ≤R<100kΩ	300V	600V			
PCF2	2.0W			-900 ~ -2000: 100kΩ≤R<200kΩ -900 ~ -2200: 200kΩ≤R<390kΩ	400V	800V	700V		

Rated Voltage =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$  or Maximum Working Voltage, whichever is lower.


## environmental applications

### Derating Curve

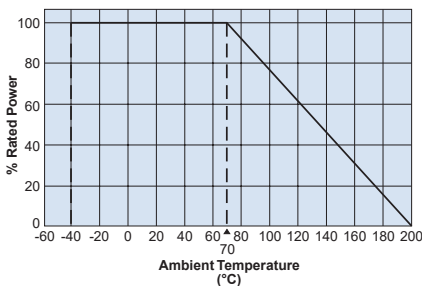

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

## Performance Characteristics

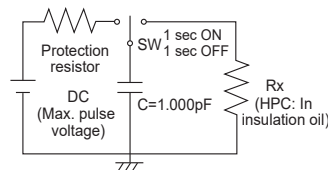Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$		Test Method																											
	Limit	Typical																												
Resistance	Within regulated to tolerance	—	Resistance 3.3Ω≤R<10Ω 10Ω≤R<100Ω 100Ω≤R≤390kΩ	Measurement voltage 0.3V 1.0V 3.0V																										
T.C.R	-500~-1300:3.3Ω≤R<10Ω -600~-1500:10Ω≤R<100Ω -700~-1800:100Ω≤R<1kΩ -900~-1900:1kΩ≤R<100kΩ -900~-2000:100kΩ≤R<200kΩ -900~-2200:200kΩ≤R≤390kΩ	—	+25°C/-40°C, +25°C/+75°C and +25°C/+125°C																											
Voltage Coefficient (Apply for over 1kΩ)	0~0.2%/V	—	Rated voltage and rated voltage x 10%																											
Overload	2%	0.4%	Rated voltage x 2.5 or maximum overload voltage for 5s, whichever less																											
Resistance to pulse	Refer to the table on the right	—	<p>The resistor mounted to the test circuit as below is applied with high voltage impulse 10,000 cycles.</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Test Voltage</th> <th>Performance Requirements <math>\Delta R \pm(\% + 0.05\Omega)</math></th> </tr> </thead> <tbody> <tr><td rowspan="3">PCF1/2</td><td>10kV:4.7Ω≤R&lt;10kΩ</td><td>5</td></tr> <tr><td>10kV:10kΩ≤R&lt;33kΩ</td><td>10</td></tr> <tr><td>10kV:33kΩ≤R&lt;100kΩ</td><td>25</td></tr> <tr><td rowspan="3">PCF1</td><td>4kV:10kΩ≤R&lt;100kΩ</td><td>5</td></tr> <tr><td>14kV:3.3Ω≤R&lt;30kΩ</td><td>5</td></tr> <tr><td>14kV:30kΩ≤R&lt;390kΩ</td><td>10</td></tr> <tr><td rowspan="3">PCF2</td><td>7kV:30kΩ≤R&lt;390kΩ</td><td>5</td></tr> <tr><td>20kV:3.3Ω≤R&lt;10kΩ</td><td>5</td></tr> <tr><td>20kV:10kΩ≤R&lt;390kΩ</td><td>10</td></tr> <tr><td>11kV:10kΩ≤R&lt;390kΩ</td><td>5</td></tr> </tbody> </table>	Type	Test Voltage	Performance Requirements $\Delta R \pm(\% + 0.05\Omega)$	PCF1/2	10kV:4.7Ω≤R<10kΩ	5	10kV:10kΩ≤R<33kΩ	10	10kV:33kΩ≤R<100kΩ	25	PCF1	4kV:10kΩ≤R<100kΩ	5	14kV:3.3Ω≤R<30kΩ	5	14kV:30kΩ≤R<390kΩ	10	PCF2	7kV:30kΩ≤R<390kΩ	5	20kV:3.3Ω≤R<10kΩ	5	20kV:10kΩ≤R<390kΩ	10	11kV:10kΩ≤R<390kΩ	5	
Type	Test Voltage	Performance Requirements $\Delta R \pm(\% + 0.05\Omega)$																												
PCF1/2	10kV:4.7Ω≤R<10kΩ	5																												
	10kV:10kΩ≤R<33kΩ	10																												
	10kV:33kΩ≤R<100kΩ	25																												
PCF1	4kV:10kΩ≤R<100kΩ	5																												
	14kV:3.3Ω≤R<30kΩ	5																												
	14kV:30kΩ≤R<390kΩ	10																												
PCF2	7kV:30kΩ≤R<390kΩ	5																												
	20kV:3.3Ω≤R<10kΩ	5																												
	20kV:10kΩ≤R<390kΩ	10																												
11kV:10kΩ≤R<390kΩ	5																													
Resistance to soldering heat	2%	0.8%	350°C±10°C, 3.5s±0.5s																											
Rapid change of temperature	2%	0.4%	-40°C (30 min.)/+85°C (30 min.), 5 cycles																											
Moisture resistance	5%	0.6%	40°C±2°C, 90%~95%RH, 1000 hours, 1.5h ON/0, 5h OFF cycles																											
Load life	5%	0.4%	70°C±2°C, 1000h, 1.5h ON/0, 5h OFF cycles																											
Resistance to Solvent	No abnormality in appearance. Marking shall be easily legible.	—	Dipping in IPA or Xylene for 3 minutes and leaving for 10 minutes after removing drops, then brushing 10 times.																											


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/19/17

### features

- KOA original bulk ceramic resistors
- Excellent in anti-pulse characteristics
- Higher reliability against disconnection compared to wirewound resistors and film resistors
- Products with lead-free terminations meet EU RoHS requirements. RoHS regulation is not intended for Pb-glass contained in the electrode.
- Non-inductive resistors
- AEC-Q200 Qualified


### dimensions and construction

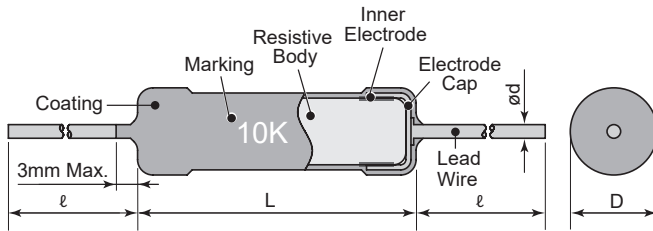

Type	Dimensions inches (mm)			
	L	D	d (nom.)	I*
HPC1/2	.433±.039 (11.0±2.0)	.138±.039 (3.5±1.0)	.031 (0.8)	1.50±.118 (38.0±3.0)
HPC1	0.630±.039 (16.0±2.0)	.177±.039 (4.5±1.0)		
HPC2	.827±.039 (21.0±2.0)	.197±.039 (5.0±1.0)		
HPC3	1.02±.039 (26.0±2.0)	.236±.039 (6.0±1.0)	.039 (1.0)	
HPC4	1.50±.039 (38.0±2.0)	.276±.039 (7.0±1.0)		
HPC5	1.73±.039 (44.0±2.0)	.295±.039 (7.5±1.0)		

\* Lead length changes depending on taping type

### Derating Curve

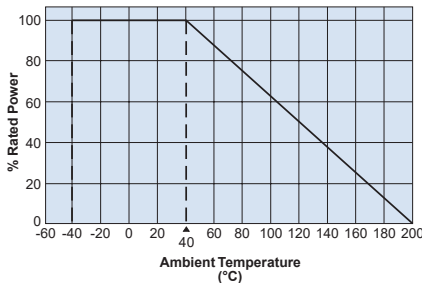


For resistors operated at an ambient temperature of 40°C or above, a power rating shall be derated in accordance with the derating curve.

### ordering information

<b>HPC</b>	<b>1/2</b>	<b>C</b>	<b>T631</b>	<b>R</b>	<b>103</b>	<b>K</b>
Type	Power Rating	Termination Material	Taping	Packaging	Nominal Resistance	Tolerance
HPC	1/2: 0.5W 1: 1W 2: 2W 3: 3W 4: 4W 5: 5W	C: SnCu	1/2: T52 1: T631	A: Ammo R: Reel	2 significant figures + 1 multiplier	K: ±10% M: ±20%

### taping

Type	Axial Taping	
	T52	T631
HPC1/2	○	—
HPC1	—	○



Contact us for lead forming details.

For further information on packaging, please refer to Appendix C.


## applications and ratings

Part Designation	Power Rating @ 40°C	Resistance Range (Ω)		T.C.R. (x10 <sup>-6</sup> /K)	Maximum Working Voltage	Maximum Overload Voltage	Rated Ambient Temp.	Operating Temp. Range
		K: ±10% E-12	M: ±20% E-6					
HPC1/2	0.5W	10 - 390K	3.3 - 330K	-500 ~ -1300: 3.3Ω≤R<10Ω	200V	400V	+40°C	-40°C to +200°C
HPC1	1.0W			-600 ~ -1500: 10Ω≤R<100Ω	300V	600V		
HPC2	2.0W			-700 ~ -1800: 100Ω≤R<1kΩ	400V	800V		
HPC3	3.0W			-900 ~ -1900: 1kΩ≤R<100kΩ	450V	900V		
HPC4	4.0W			-900 ~ -2000: 100kΩ≤R<200kΩ	500V	1000V		
HPC5	5.0W			-900 ~ -2200: 200kΩ≤R<390kΩ	550V	1100V		

Rated voltage =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$  or Max. working voltage, whichever is lower

## environmental applications

### Performance Characteristics

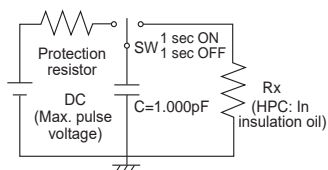Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$		Test Method																														
	Limit	Typical																															
Resistance	Within regulated to tolerance	—	Resistance	Measurement voltage																													
			3.3Ω≤R<10Ω	0.3V																													
			10Ω≤R<100Ω	1.0V																													
			100Ω≤R<390kΩ	3.0V																													
T.C.R	-500~-1300:3.3Ω≤R<10Ω -600~-1500:10Ω≤R<100Ω -700~-1800:100Ω≤R<1kΩ -900~-1900:1kΩ≤R<100kΩ -900~-2000:100kΩ≤R<200kΩ -900~-2200:200kΩ≤R<390kΩ	—	+25°C/-40°C and +25°C/+125°C																														
Voltage Coefficient (Apply for over 1kΩ)	0~-0.2%/V (HPC1/2) 0~-0.1%/V (HPC1) 0~-0.05%/V (HPC2,3,4,5)	—	Rated voltage and rated voltage x 10%																														
Overload	2%	0.4%	Rated voltage x 2.5 or maximum overload voltage for 5s, whichever less																														
Resistance to pulse	Refer to the table on the right	—	<p>The resistor mounted to the test circuit as below is applied with high voltage impulse 10,000 cycles.</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Test Voltage</th> <th>Performance Requirements <math>\Delta R \pm(\% + 0.05\Omega)</math></th> </tr> </thead> <tbody> <tr> <td rowspan="3">HPC1/2</td> <td>8kV:3.3Ω≤R&lt;30kΩ</td> <td>5</td> </tr> <tr> <td>8kV:30kΩ≤R&lt;390kΩ</td> <td>10</td> </tr> <tr> <td>5kV:30kΩ≤R&lt;390kΩ</td> <td>5</td> </tr> <tr> <td rowspan="2">HPC1</td> <td>15kV:3.3Ω≤R&lt;30kΩ</td> <td>5</td> </tr> <tr> <td>15kV:30kΩ≤R&lt;390kΩ</td> <td>10</td> </tr> <tr> <td rowspan="3">HPC2</td> <td>7kV:30kΩ≤R&lt;390kΩ</td> <td>5</td> </tr> <tr> <td>25kV:3.3Ω≤R&lt;30kΩ</td> <td>5</td> </tr> <tr> <td>25kV:30kΩ≤R&lt;390kΩ</td> <td>10</td> </tr> <tr> <td>HPC3</td> <td>15kV:30kΩ≤R&lt;390kΩ</td> <td>5</td> </tr> <tr> <td>HPC4</td> <td rowspan="2">25kV</td> <td rowspan="2">5</td> </tr> <tr> <td>HPC5</td> </tr> </tbody> </table> 		Type	Test Voltage	Performance Requirements $\Delta R \pm(\% + 0.05\Omega)$	HPC1/2	8kV:3.3Ω≤R<30kΩ	5	8kV:30kΩ≤R<390kΩ	10	5kV:30kΩ≤R<390kΩ	5	HPC1	15kV:3.3Ω≤R<30kΩ	5	15kV:30kΩ≤R<390kΩ	10	HPC2	7kV:30kΩ≤R<390kΩ	5	25kV:3.3Ω≤R<30kΩ	5	25kV:30kΩ≤R<390kΩ	10	HPC3	15kV:30kΩ≤R<390kΩ	5	HPC4	25kV	5	HPC5
Type	Test Voltage	Performance Requirements $\Delta R \pm(\% + 0.05\Omega)$																															
HPC1/2	8kV:3.3Ω≤R<30kΩ	5																															
	8kV:30kΩ≤R<390kΩ	10																															
	5kV:30kΩ≤R<390kΩ	5																															
HPC1	15kV:3.3Ω≤R<30kΩ	5																															
	15kV:30kΩ≤R<390kΩ	10																															
HPC2	7kV:30kΩ≤R<390kΩ	5																															
	25kV:3.3Ω≤R<30kΩ	5																															
	25kV:30kΩ≤R<390kΩ	10																															
HPC3	15kV:30kΩ≤R<390kΩ	5																															
HPC4	25kV	5																															
HPC5																																	
Resistance to soldering heat	2%	0.8%	350°C±10°C, 3.5s±0.5s																														
Rapid change of temperature	2%	0.4%	-40°C(30min.)/+85°C(30min.), 5 cycles																														
Moisture resistance	5%	0.6%	40°C±2°C, 90%~95%RH, 1000 hours, 1.5h ON/0, 5h OFF cycles																														
Load life	5%	0.4%	40°C±2°C, 1000h, 1.5h ON/0, 5h OFF cycles																														
Resistance to Solvent	No abnormality in appearance. Marking shall be easily legible.	—	Dipping in IPA or Xylene for 3 minutes and leaving for 10 minutes after removing drops, then brushing 10 times.																														
High Temperature Exposure	5%	1.7%	+200°C, 1000 hours																														


**features**

- Suitable for noise suppression of engine ignition system
- Reliable in pulse/transient applications
- Products meet EU RoHS requirements. RoHS regulation is not intended for Pb-glass contained in the electrode.



leaded resistors

**dimensions and construction**

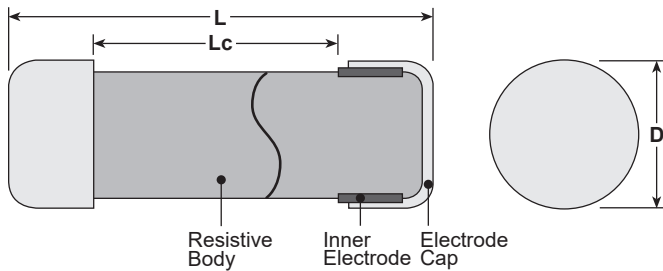

Size Code	Dimensions inches (mm)			Cap Material
	L	Lc (min.)	D	
CPCN1/2	.421±.02 (10.7±0.5)	.213 (5.4)	.138±.004 (3.5±0.1)	Fe(Ni/Cu plating)
CPCN1	.63±.024 (16.0±0.6)	.378 (9.6)	.187±.012 (4.75±0.3)	
CPCN2N	.720±.024 (18.3±0.6)	.452 (11.5)	.187±.012 (4.75±0.3)	
CPCN2NS	.720±.024 (18.3±0.6)	.452 (11.5)	.187±.012 (4.75±0.3)	SUS304
CPCN3	.720±.024 (18.3±0.6)	.394 (10.0)	.283±.012 (7.2±0.3)	Fe(Sn/Cu plating)

**ordering information**

<b>CPCN</b>	<b>2N</b>	<b>S</b>	<b>502</b>	<b>M</b>
Type	Power Rating Symbol	Cap Material Symbol	Nominal Resistance	Tolerance
	1/2: 0.5W 1: 1.0W 2N: 1.5W 3: 2.0W	S: SUS304 Nil: Fe (plating)	2 significant figures + 1 multiplier	M: ±20%


## applications and ratings

Type	Power Rating	Nominal Resistance	Resistance Tolerance	T.C.R. (ppm/°C)	Maximum Working Voltage	Maximum Overload Voltage	Rated Ambient Temperature	Operating Temperature Range
CPCN1/2	0.5W	1kΩ, 5kΩ, 10kΩ, 15kΩ	M: ±20%	-1200±300	86V	215V	+40°C	-40°C to +200°C
CPCN1	1.0W				122V	305V		
CPCN2N CPCN2NS	1.5W	1kΩ, 2kΩ, 5kΩ, 10kΩ, 15kΩ			150V	375V		
CPCN3	2.0W	15kΩ			173V	432V		

Rated Voltage =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$  or Maximum Working Voltage, whichever is lower.

## environmental applications

### Derating Curve

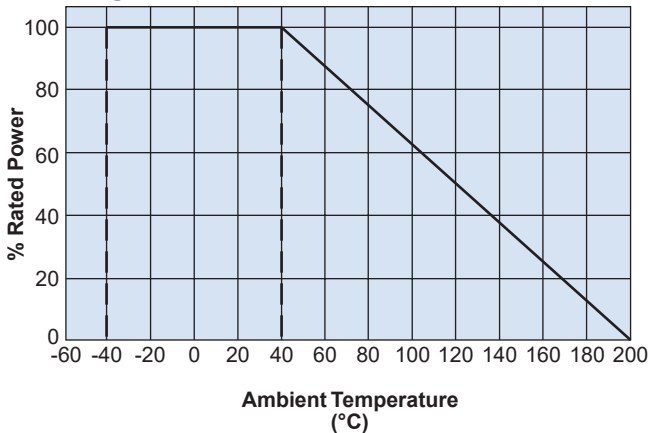

For resistors operated at an ambient temperature of 40°C or higher, the power rating shall be derated in accordance with this derating curve.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method			
	Limit	Typical	Resistance	Measurement Voltage		
Resistance	Within regulated tolerance	—	1kΩ, 2kΩ, 5kΩ	10V	25°C	
			10kΩ, 15kΩ	30V		
T.C.R.	-1200±300ppm/°C	—	+25°C/-40°C and +25°C/+125°C			
Voltage Coefficient	0 ~ -0.2%/V	—	Rated voltage and rated voltage x 10%			
Overload	2	0.3	Rated voltage x 2.5 or max. overload voltage for 5 seconds, whichever is less			
Load Life at High Voltage Pulse	30	—	Continuous 250h high voltage pulse on the test circuit (Refer to JIS D5111) CPCN1/2, CPCN1 in insulation oil			
Resistor Body Strength	No mechanical damages	—	Type	Holding Distance	Time	Force
			CPCN1/2	5.0 ± 0.2mm	10 seconds	98N (10kgf)
			CPCN1	9.0 ± 0.3mm		
			CPCN2N/2NS CPCN3	12.3 ± 0.3mm	490N (50kgf)	
Rapid Change of Temperature	5.0	—	-55°C (15 minutes), +155°C (15 minutes), 500 cycles			
Moisture Resistance	5.0	0.9	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle			
Load Life	5.0	0.7	40°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle			
Low Temperature Operation	5.0	0.7	-40°C, 24 hours			
High Temperature Exposure	5.0	2.0	+200°C, 1000 hours			

The resistance measurement before and after the examination should be performed in room temperature with difference ±1°C.




### features

- PSO is made completely moisture preventive to be PSN that can be used under high moisture environment
- PN is a non-inductive type and can be used for high frequency
- PWW resistors, which are non-inductive wirewound resistors for high voltage with resistance wires wound on insulation pipes
- PAP resistors are non-inductive wirewound resistors with inductance less than PWW, can be used for pulse wave measurement, impulse generators, etc. and have the same dimensions as PWW resistors




### dimensions and construction


PSN • PV



PN, PWW, PAP



PSO



Size Code	Dimensions (mm)			Weight (g)
	L	D±0.5	H (Nominal)	
PSN-0.5	50±2	17.5	10	20
PSN-1	100±2			30
PSN-2	200±2	24	15	85
PSN-3	300±2	33	20	250
PSN-4	400±3	45		600
PSN-5	500±3	62	25	800
PSN-6	1000±5			1350
PV-0.5	80±2	9.5	8	12
PV-1	150±2			23
PV-2	250±2	17.5	10	45
PV-5		24	15	105
PV-8		33	20	220
PSO-0.5	55±5	28	10	120
PSO-1	105±5			150
PSO-2	205±5	38		370

Size Code	Dimensions (mm)			Weight (g)
	L	D±0.5	H (Nominal)	
PSO-3	320±5	46	20	760
PSO-4	420±5	65		1900
PSO-5	530±5	80	25	3500
PSO-6	1050±5			6200
PN-0.5	50±2	17	8	25
PN-1	100±2			55
PN-2	200±2		12	80
PN-3	300±2			100
PN-4	400±2		125	
PWW-3, PAP-3	300±2	33	20	310 • 250
PWW-4, PAP-4	400±3	45		660 • 510
PWW-5, PAP-5	500±3	62	25	1330 • 960
PWW-6, PAP-6	1000±5			2700 • 1850

### ordering information

PSN RoHS

PSN	0.5	CP	F	A	105	J
Product Code	Power Rating	Cap	RoHS	Holder	Nominal Resistance	Resistance Tolerance
	0.5 : 2W 1 : 5W 2 : 10W 3 : 25W 4 : 50W 5 : 125W 6 : 250W	C M MS CP		Nil: No Holder A B	3 digits	J : ±5% K : ±10% M : ±20%

PSO RoHS

PSO	0.5	C	F	105	J
Product Code	Power Rating	Cap	RoHS	Nominal Resistance	Resistance Tolerance
	0.5 : 1.5W 1 : 4W 2 : 8W 3 : 20W 4 : 40W 5 : 100W 6 : 200W	C		3 digits	J : ±5% K : ±10% M : ±20%

### ordering information

#### PV RoHS

PV	0.5	CP	F	A	105	J
<b>Product Code</b>	<b>Power Rating</b>	<b>Cap</b>	<b>RoHS</b>	<b>Holder</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
	0.5 : 2W 1 : 4W 2 : 7W 5 : 12W 8 : 20W	C M CP		Nil: No Holder A B	3 digits	J : ±5% K : ±10% M : ±20%

#### PN RoHS

PN	0.5	CP	F	105	J
<b>Product Code</b>	<b>Power Rating</b>	<b>Cap</b>	<b>RoHS</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
	0.5 : 1.5W 1 : 3W 2 : 6W 3 : 9W 4 : 12W	C M CP		3 digits	J : ±5% K : ±10% M : ±20%

#### PWW, PAP RoHS

PWW	3	M	F	A	102	J
<b>Product Code</b>	<b>Power Rating</b>	<b>Cap</b>	<b>RoHS</b>	<b>Holder</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
PWW PAP	3 : 25W 4 : 50W 5 : 100W 6 : 200W	M		Nil: No Holder A B	3 digits	J : ±5% K : ±10% M : ±20%

### applications and ratings


Part Designation	Power Rating (W)	Resistance Range (Ω) J: ±5% K: ±10% M: ±20% (E24)	T.C.R. (x10 <sup>-6</sup> /K)	Maximum Working Voltage	Impulse Withstand Voltage	Energy Rating 1 time/ 5 min.	Operating Temperature Range	Inductance (μH) Maximum		
PSN-0.5	2	500~500M	±1500: +25°C/-15°C	15kV	20kV	50J	-30°C~+125°C	—		
PSN-1	5	1k~1G		30kV	40kV	125J				
PSN-2	10	2k~2G		60kV	80kV	400J				
PSN-3	25	3k~3G		90kV	120kV	1.8kJ				
PSN-4	50	4k~4G		120kV	160kV	4.0kJ				
PSN-5	125	5k~5G		150kV	200kV	9.0kJ				
PSN-6	250	6k~6G	300kV	400kV	20.0kJ					
PV-0.5	2	500~500M	±1000: +25°C/+85°C (R<1GΩ)	24kV	32kV	45J	-15°C~+60°C	—		
PV-1	4	1k~1G		45kV	60kV	90J				
PV-2	7	1.5k~1.5G		75kV	100kV	270J				
PV-5	12	2.5k~2.5G	±3000 (R≥1GΩ)	—	—	650J	-30°C~+125°C	—		
PV-8	20	2.5k~2.5G				950J				
PSO-0.5	1.5	500~500M				15kV			20kV	40J
PSO-1	4	1k~1G				30kV			40kV	100J
PSO-2	8	2k~2G				60kV			80kV	320J
PSO-3	20	3k~3G				90kV			120kV	1.5kJ
PSO-4	40	4k~4G	120kV	160kV	3.2kJ					
PSO-5	100	5k~5G	150kV	200kV	7.2kJ					
PSO-6	200	6k~6G	300kV	400kV	16.0kJ					
PN-0.5	1.5	50~500k	±200	—	—	35J	-30°C~+125°C	33		
PN-1	3	100~1M				70J		45		
PN-2	6	200~2M				130J		62		
PN-3	9	300~3M				200J		62		
PN-4	12	400~4M	270J	62						
PWW-3	25	10~800	—	—	—	2kJ~5kJ	33			
PWW-4	50	15~1.5k				4kJ~12kJ	45			
PWW-5	100	25~2.5k				7kJ~20kJ	62			
PWW-6	200	50~5k				14kJ~40kJ	62			
PAP-3	25	10~400				1kJ~2kJ	33			
PAP-4	50	10~800				1.5kJ~4kJ	45			
PAP-5	100	15~1k	3.5kJ~10kJ	62						
PAP-6	200	25~2k	7kJ~25kJ	62						

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/21/17


### environmental applications

#### Derating Curve

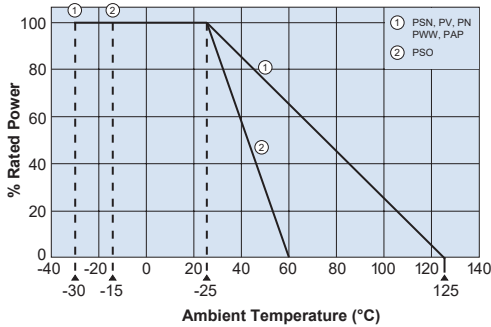

For resistors operated at an ambient temperature of 25°C or above, a power rating shall be rated in accordance with the above derating table.

#### Holder Dimensions (mm)

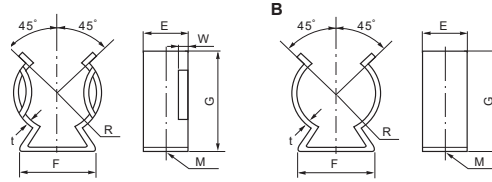

Type	R	E	F	G	M	t	W
PSN-0.5, PSN-1, PV-2	8.5	11	16	24	ø4.2	0.8	1.5±0.5
PSN-2, PV-5	11.5	15	18	32		1.0	1.5±1.0
PSN-3, PV-8, PWW-3, PAP-3	16	18	24	40	ø6.5	1.5	2.0±1.0
PSN-4, PWW-4, PAP-4	22	20	36	59		1.5	
PSN-5, 6, PWW-5, 6, PAP-5, 6	30	25	46	74		1.5	


### Performance Characteristics

Parameter	Requirements $\Delta R \pm \%$	Test Method
Resistance	Within specified tolerance	25°C
T.C.R.	Within specified T.C.R.	R < 1GΩ: PSN: ±1500 : +25°C/-15°C PSN: ±1000 : +25°C/+85°C R ≥ 1GΩ: PSN: ±3000 : +25°C/-15°C, +25°C/+85°C
Rapid Change of Temperature	5%	-30°C (30 minutes)/+85°C (30 minutes) 5 cycles Except for PSN
Voltage Characteristics	3%	Rated voltage or max. working voltage, whichever is lower and 1/10 of its voltage
Moisture Resistance	5% : R < 100MΩ 10% : R ≥ 100MΩ	40°C, 90%~95%RH, 250 hours
Endurance at 25°C	5% : R < 100MΩ 10% : R ≥ 100MΩ	25°C, 500 hours 25°C, 500 hours, Continuous load

### Cap Dimensions (mm)

Cap Shape	C			M				MS				CP		C			
Type	D	d		D	M	K	A	D	M	K	A	d	ℓ	D	M	ℓ <sub>1</sub>	ℓ <sub>2</sub>
PSN-05;PSN-1;PV-2	17.5	7		17.5	3	2	7	—	—	—	—	1.0	90	—	—	—	—
PSN-2;PV-5	24	12		24	4	2	10	—	—	—	—	1.2	120	—	—	—	—
PSN-3;PV-8,PWW-3;PAP-3	33	14		33	5	4	14	—	—	—	—	—	—	—	—	—	—
PSN-4;PWW-4;PAP-4	—	—		45	6	4	16	45	8	4	16	—	—	—	—	—	—
PSN-5,6;PWW-5,6;PAP-5,6	—	—		62	8	7	26	62	10	7	37	—	—	—	—	—	—
PV-0.5;PV-1	9.5	Without hole		—	—	—	—	—	—	—	—	0.9	90	—	—	—	—
PN-0.5	17	Without hole		—	—	—	—	—	—	—	—	1.0	90	—	—	—	—
PN-1	—	—		17	4	—	—	—	—	—	—	1.0	90	—	—	—	—
PN-2~PN-4	—	—		17	4	—	—	—	—	—	—	1.2	120	—	—	—	—
PSO-05,1	—	—		—	—	—	—	—	—	—	—	—	—	28	4	8	—
PSO-2	—	—		—	—	—	—	—	—	—	—	—	—	38	6	10	—
PSO-3	—	—		—	—	—	—	—	—	—	—	—	—	46	8	—	15
PSO-4	—	—		—	—	—	—	—	—	—	—	—	—	65	10	—	20
PSO-5,6	—	—		—	—	—	—	—	—	—	—	—	—	80	12	—	25

**reduced size metal oxide power type  
leaded resistor**

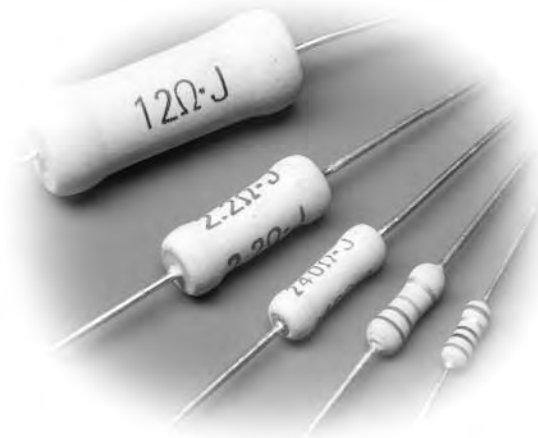


**features**

- Small size power type resistor
- Coated with UL94V0 equivalent flameproof material
- Suitable for automatic machine insertion
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- Surface mount style "N" forming is suitable for automatic mounting

leaded resistors

**dimensions and construction**

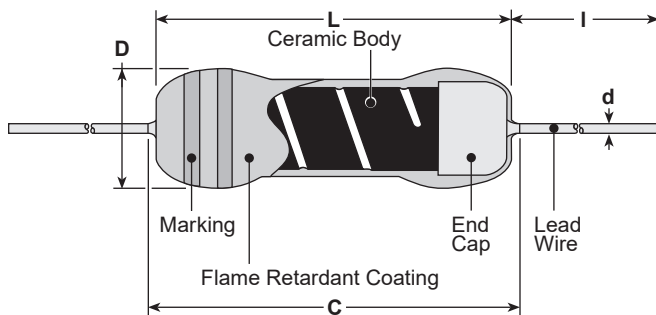

Type	Dimensions inches (mm)				
	L	C (max.)	D	d (nom.) <sup>1</sup>	I*
MOS1/2 MOSX1/2	.244±.02 (6.2±0.5)	.280 (7.1)	.098±.02 (2.5±0.5)	.024 (0.6)	.945 Min. (24.0 Min.)
MOS1 MOSX1	.354±.039 (9.0±1.0)	.437 (11.1)	.118±.02 (3.0±0.5)	.024/.031 (0.6)/(0.8)	
MOS2 MOSX2	.472±.039 (12.0±1.0)	.591 (15.0)	.157±.02 (4.0±0.5)	.031 (0.8)	1.18±.118 (30.0±3.0)
MOS3 MOSX3	.610±.039 (15.5±1.0)	.709 (18.0)	.236±.039 (6.0±1.0)		1.50±.118 (38.0±3.0)
MOS5 MOSX5	.965±.039 (24.5±1.0)	1.10 (28.0)	.354±.039 (9.0±1.0)		

\* Lead length changes depending on taping and forming type.

<sup>1</sup> Ex. MOS1C, 1CT52, 1CT526 = 0.6MM  
MOS1C8, 1CT528 = 0.8MM

**ordering information**

MOS	1	C	T52	8	A	103	J
Type	Power Rating	Termination Material	Taping and Forming	Lead Diameter	Packaging	Nominal Resistance	Tolerance
MOS MOSX	1/2: 0.5W 1: 1W 2: 2W 3: 3W 5: 5W	C: SnCu	Axial: T26, T52, T521, T631 Stand-off Axial: L52, L521, L631 Radial: VTP, VTE, GT, GT4, VTF L, U, M, N Forming	MOS(X)1: T52 & Bulk Only: 6: 0.6mm 8: 0.8mm Blank: All others sizes & packaging	A: Ammo R: Reel TEB, TEG: Plastic embossed (N forming)	±2%, ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω ±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	F: ±1% G: ±2% J: ±5%

For further information on packaging, please refer to Appendix C.


## applications and ratings

Part Designation	Power Rating @ 70°C	Minimum Dielectric Withstanding Voltage	T.C.R. (ppm/°C) Max.	Resistance Range			Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temperature Range
				E-24, E-96* (F±1%)	E-24* (G±2%)	E-24 (J±5%)			
MOS1/2	0.5W	400V	±300	10Ω - 47kΩ	10Ω - 47kΩ	10Ω - 47kΩ	$E = \sqrt{P \times R}$	600V	-55°C to +200°C
MOS1	1.0W	500V		10Ω - 68kΩ	10Ω - 68kΩ	10Ω - 100kΩ			
MOS2	2.0W			10Ω - 100kΩ	10Ω - 100kΩ		350V	700V	
MOS3	3.0W	700V		—		10Ω - 100kΩ			
MOS5	5.0W	800V			0.1Ω - 9.1Ω		0.1Ω - 9.1Ω	$E = \sqrt{P \times R}$	
MOSX1/2	0.5W	400V		—		0.22Ω - 9.1Ω			
MOSX1	1.0W	500V			0.1Ω - 9.1Ω		0.1Ω - 9.1Ω	0.1Ω - 9.1Ω	
MOSX2	2.0W			700V		—			
MOSX3	3.0W	800V			—		0.22Ω - 9.1Ω	0.1Ω - 9.1Ω	
MOSX5	5.0W			800V		—			


\* Please consult when there is a demand of the resistance besides the 1% and 2% range.

## environmental applications

### Derating Curve

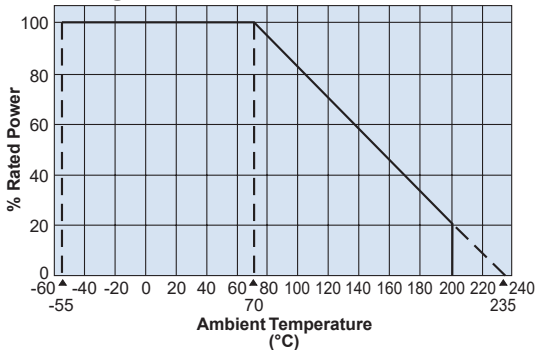

### Surface Temperature Rise

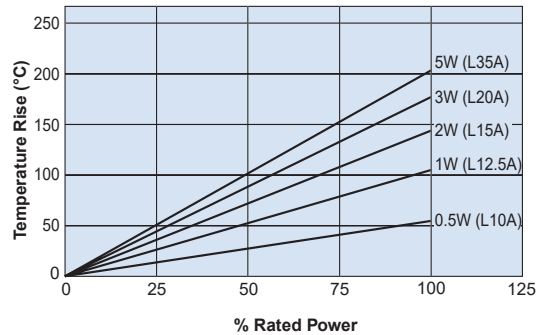


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	Measuring points are at 10mm ±1mm from the end cap.
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Overload (Short time)	±(2% +0.1Ω)	±1%	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1%	±0.5%	260°C ±5°C, 10 seconds ± 1 second
Terminal Strength	No lead-coming off and loose terminals	—	Twist 360°C, 5 times
Rapid Change of Temperature	±1%	±0.5%	-55°C (30 minutes), +155°C (30 minutes), 5 cycles
Moisture Resistance	±(5%+0.1Ω)	±2.5%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±(5%+0.1Ω)	±2.5%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Resistance to Solvent	No abnormality in appearance. Marking shall be easily legible	—	Ultrasonic washing with isopropyl alcohol for 2 minutes. Power: 0.3W/cm <sup>3</sup> , f: 28kHz, Temp: 35°C ±5°C
Flame Retardant	No evidence of flaming or self-flaming	—	Flame test: the test flame shall be applied and removed for each 15 seconds respectively to repeat the cycle 5 times. Overload flame retardant: power (AC) corresponding to 2, 4, 8, 16 and 32 times the power rating shall be applied for each 1 minute until disconnection occurs. However the applied voltage shall not exceed the value of 4 times of the maximum operating voltage


**secondary processed products**

**L Forming**

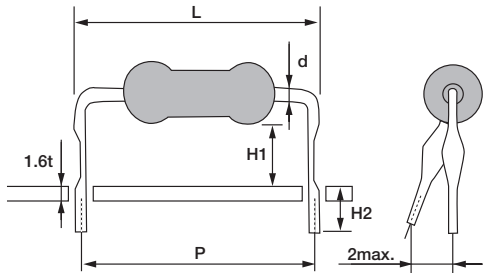


Type	Dimensions millimeters					Substrate Hole Dia.
	P	H1	H2	d (Nom.)	L max.	
1/2CL10A	10.0±1.0	5.3±1.0	4.0	0.6	17.5	ø0.8
1CL12.5A	12.5±1.0	7.0±1.0				
1CL15A	15.0±1.0	6.5±1.0				
2CL15A		7.0±1.0				
2CL15F	4.5±1.0					
2CL20A	20.0±1.0	9.0±1.0				
2CL20D		4.8±1.0				
3CL20A		8.0±1.0				
3CL20C		10.0±1.0				
3CL20T		4.0±1.0				
3CL25A	25.0±1.0	7.0±1.0				
3CL30A	30.0±1.0	7.0±1.0				
5CL30A		8.5±1.0				
5CL35A	35.0±1.0	5.5±1.0				

**M Forming**

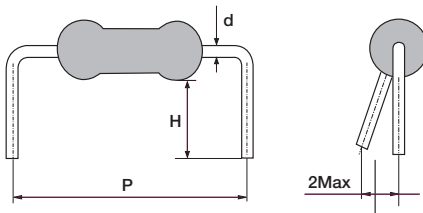

Type	Dimensions millimeters			Substrate Hole Dia.
	P	H	d (Nom.)	
1/2CM10C	10.0±1.0	3.5±1.0	0.6	ø0.8
1/2CM10F	10.0±1.0	5.0±1.0	0.6	
1CM12.5C	12.5±1.0	3.5±1.0	0.8	ø1.0
1CM12.5D	12.5±1.0	4.0±1.0	0.8	
1CM15F	15.0±1.0	5.0±1.0	0.8	
1CM15J	15.0±1.0	6.3±1.0	0.8	
1CM15S	15.0±1.0	11.0±1.0	0.8	
2CM15C	15.0±1.0	3.5±1.0	0.8	
2CM15E	15.0±1.0	4.5±1.0	0.8	
2CM16D	16.0±1.0	4.0±1.0	0.8	
2CM20D	20.0±1.0	4.0±1.0	0.8	
2CM20U	20.0±1.0	13.5±1.0	0.8	
3CM20E	20.0±1.0	4.6±1.0	0.8	
3CM26E	26.0±1.0	4.7±1.0	0.8	
5CM30U	30.0±1.0	13.0±1.0	0.8	

**UCL Forming**




Type	Dimensions millimeters				Insertion Pitch	Substrate Hole Dia.
	H1	H2	H3	d (Nom.)		
1CUCL	13.0±1.0	17.0 max.	3.5±1.0	0.8	5.0	ø1.0
2CUCL	14.5±1.0	18.5 max.	3.5±1.0			
3CUCL	20.0 max.	22.0±1.0	4.0±1.0			




**secondary processed products** (continued)

**VTF Radial Taping**

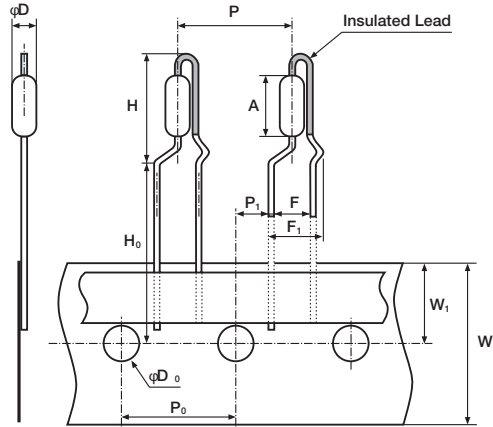


Type	1/2C	1C	2C	2C
	VTP	VTP	VTP	VTF
A	6.2±0.5	9.0±1.0	12.0±1.0	12.0±1.0
øD	2.5±0.5	3.0±0.5	4.0±0.5	4.0±0.5
d (Nom.)	0.6	0.6	0.65	0.8
F	5.0±0.5	5.0±0.5	5.0±0.5	5.0±0.5
F1	—	—	—	7.3 max.
H	13 max.	16 max.	22.5 max.	22.5 max.
H0	16.0+1.0/-0	16.0+1.0/-0	16.0+1.0/-0	16.0+1.0/-0
P	12.7±1.0	12.7±1.0	12.7±1.0	12.7±1.0
P0	12.7±0.3	12.7±0.3	12.7±0.3	12.7±0.3
P1	3.85±0.7	3.85±0.7	3.85±0.7	3.85±0.7
W	18.0±0.5	18.0±0.5	18.0±0.5	18.0±0.5
W1	9.0±0.5	9.0±0.5	9.0±0.5	9.0±0.5
øD0	4.0±0.2	4.0±0.2	4.0±0.2	4.0±0.2
Substrate Hole Dia.	ø0.8	ø0.8	ø0.8	ø1.0

**VTP Radial Taping**

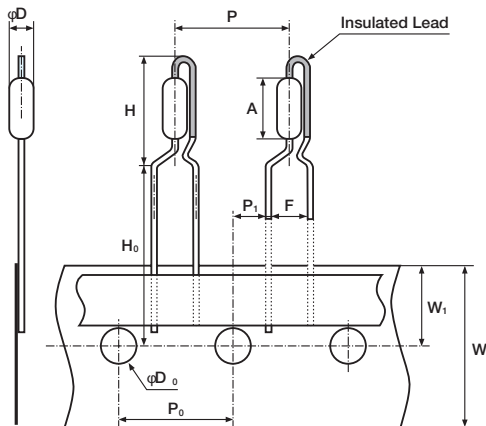


**N Forming**

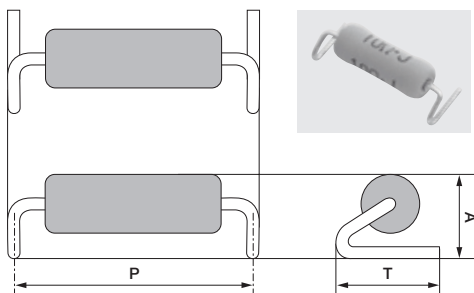

Type	1C	2C	3C
	N14.5TEB	N17TEB	N20TEG
P±1	14.5	17.0	20.0
T±0.5	5.0	6.0	7.5±1.0
A±0.5	4.8	5.8	6.5
d (Nom.)	0.8	0.8	0.8

**UCL Forming**

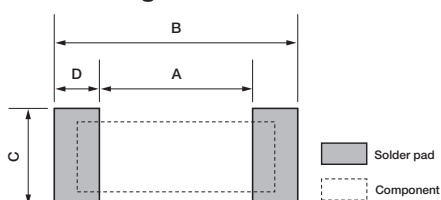

Type	1C	2C	3C
	N14.5TEB	N17TEB	N20TEG
A	12.5	14.6	17.6
B	16.5	19.4	22.4
C	7.0	8.0	9.5
D	2.0	2.4	2.4




**features**

- Fixed metal film resistor available (specify “SPRX”)
- Flameproof silicone coating equivalent to (UL94V0)
- High reliability performance
- Suitable for automatic machine insertion
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- Surface mount style “N” forming is suitable for automatic mounting

leaded resistors

**dimensions and construction**

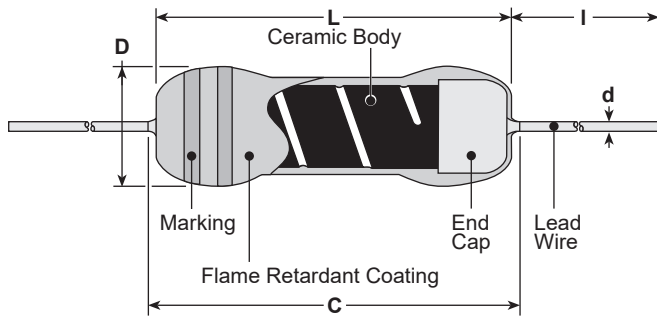

Type	Dimensions inches (mm)				
	L	C (max.)	D	d nominal	I*
SPR1/4 SPRX1/4	.13±.012 (3.3±0.3)	.138 (3.5)	.067±.012 (1.7±0.3)	.018 (0.45)	.787 Min. (20.0 Min.)
SPR1/2 SPRX1/2	.244±.02 (6.2±0.5)	.280 (7.1)	.098±.02 (2.5±0.5)	.024 (0.6)	.945 Min. (24.0 Min.)
SPR1 SPRX1	.354±.039 (9.0±1.0)	.437 (11.1)	.138±.02 (3.5±0.5)	.031 (0.8)	
SPR2 SPRX2	.472±.039 (12.0±1.0)	.591 (15.0)	.165±.031 (4.2±0.8)		1.18±.118 (30.0±3.0)
SPR3 SPRX3	.610±.039 (15.5±1.0)	.709 (18.0)	.236±.039 (6.0±1.0)	1.50±.118 (38.0±3.0)	
SPR5 SPRX5	.965±.039 (24.5±1.0)	1.10 (28.0)	.354±.039 (9.0±1.0)		

\* Lead length changes depending on taping and forming type.

**ordering information**

SPR	1/2	C	T52	R	103	J
<b>Type</b>	<b>Power Rating</b>	<b>Termination Material</b>	<b>Taping and Forming</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
SPR SPRX	1/4: 0.25W 1/2: 0.5W 1: 1W 2: 2W 3: 3W 5: 5W	C: SnCu	Axial: T26, T52, T521, T631 Stand-off Axial: L52, L521, L631 Radial: VT, VTP, VTE, GT, VTF L, U, M, N Forming	A: Ammo R: Reel TEB: Embossed plastic (N forming)	±2%, ±5%: 2 significant figures + 1 multiplier “R” indicates decimal on value <10Ω ±1%: 3 significant figures + 1 multiplier “R” indicates decimal on value <100Ω	F: ±1% G: ±2% J: ±5%

For further information on packaging, please refer to Appendix C.


## applications and ratings

Part Designation	Power Rating @ 70°C	Minimum Dielectric Withstanding Voltage	T.C.R. (ppm/°C)	Resistance Range E-24* (F±1%, G±2%)	Resistance Range E-24 (J±5%)	Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temperature Range
SPR1/4	0.25W	300V	±350	10Ω - 91KΩ	2.2Ω - 10KΩ	$E = \sqrt{P \times R}$	500V	-55°C to +200°C
SPR1/2	0.5W	500V			2.2Ω - 91KΩ		800V	
SPR1	1W				2.2Ω - 91KΩ		1000V	
SPR2	2W	2.2Ω - 91KΩ						
SPR3	3W	2.2Ω - 91KΩ			500V			
SPR5	5W	800V			600V		1200V	
SPRX1/4	0.25W	300V		1.0Ω - 2.0Ω	0.1Ω - 2.0Ω	$E = \sqrt{P \times R}$	E x 2.5	
SPRX1/2	0.5W	500V						
SPRX1	1W							
SPRX2	2W	700V						
SPRX3	3W							
SPRX5	5W	800V						


\* Please consult when there is a demand of the resistance besides the 1% and 2% range.  
Rated Ambient Temperature: +70°C

## environmental applications


### Derating Curve

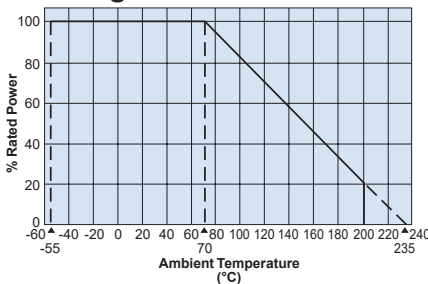

### Surface Temperature Rise

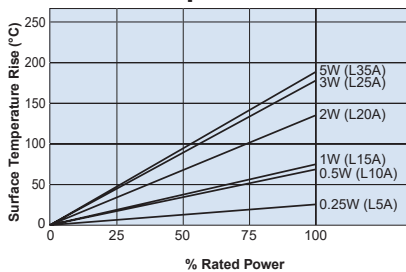

### Load Life @ 70°C, 1000 Hr

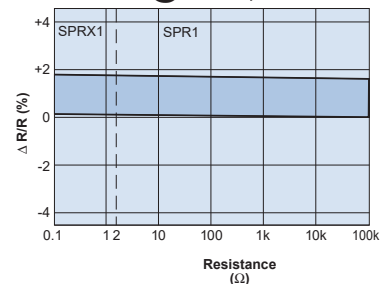

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	Measuring points are at 10mm ±1mm from the end cap.
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Overload (Short time)	±(1%+0.1Ω)	±0.5%	Rated voltage x 2.5 or max. overload voltage for 5 seconds, whichever is lower
Resistance to Solder Heat	±1%	±0.5%	260°C ±5°C, 10 seconds ± 1 second
Terminal Strength	No lead-coming off and loose terminals	—	Twist 360°C, 5 times
Rapid Change of Temperature	±1%	±0.5%	-55°C (30 minutes), +155°C (30 minutes), 5 cycles
Moisture Resistance	±(3%+0.1Ω):1/4W-2W ±(5%+0.1Ω):3W,5W	1.5: 1/4W-2W 2.5: 3W, 5W	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±(3%+0.1Ω):1/4W-2W ±(5%+0.1Ω):3W,5W	1.5: 1/4W-2W 2.5: 3W, 5W	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Resistance to Solvent	No abnormality in appearance. Marking shall be easily legible	—	Ultrasonic washing with isopropyl alcohol for 2 minutes. Power: 0.3W/cm <sup>3</sup> , f: 28kHz, Temp: 35°C ±5°C
Flame Retardant	No evidence of flaming or self-flaming	—	Flame test: the test flame shall be applied and removed for each 15 seconds respectively to repeat the cycle 5 times. Overload flame retardant: power (AC) corresponding to 2, 4, 8, 16 and 32 times the power rating shall be applied for each 1 minute until disconnection occurs. However the applied voltage shall not exceed the value of 4 times of the maximum operating voltage

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


5/09/18



### features

- Flameproof retardant coating (equivalent to UL94-V-0)
- Fail-safe mains fusing at AC 250V (CWFS23: 4.7Ω~9.1Ω: AC200V)
- Products with lead-free terminations meet EU RoHS

### dimensions and construction

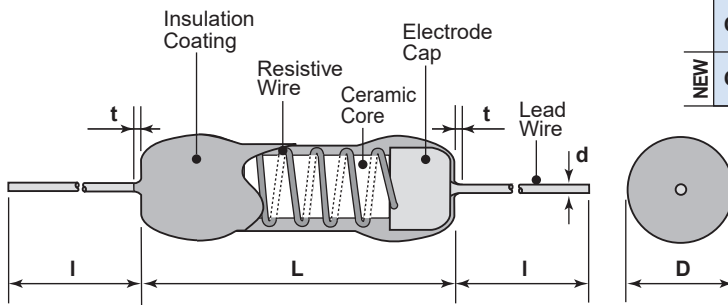

Type	Dimensions inches (mm)				
	L	D	I	d (nom.)	t (max.)
CWFS23	.472±.039 (12.0±1.0)	.157±.039 (4.0±1.0)	1.18±.118 (30.0±3.0)	.031 (0.8)	.118 (3.0)
<b>NEW</b> CWFS35	.591±.039 (15.0±1.0)	.236±.039 (6.0±1.0)	1.18±.118 (30.0±3.0)	.031 (0.8)	.118 (3.0)

### ordering information

<b>COATING</b> Product Code	<b>SAFETY</b> Type S: Safety Fusing	<b>POWER RATING</b> 23: 3W <b>NEW</b> 35: 5W	<b>TERMINATION</b> Material C: SnCu	<b>TAPING AND FORMING</b> 23: T52 35: T521	<b>PACKAGING</b> A: Ammo	<b>NOMINAL RESISTANCE</b> J: 3 digits	<b>TOLERANCE</b> J: ±5%
--------------------------------	---	--	---	--	-----------------------------	--	----------------------------

Contact KOA when you have control request for environmental hazardous material other than the substance specified by EU RoHS.  
For further information on packaging, please refer to Appendix C.  
Lead length changes depending on taping and forming type.

leaded resistors


## applications and ratings

Part Designation	Power Rating	Rated Terminal Part Temperature	Resistance Range E-24 (J±5%)	Fusing Characteristics		T.C.R. (x10 <sup>-6</sup> /K)	Operating Temperature Range
				Fusing Power	Fusing Time		
CWFS23	3	+120°C	4.7Ω - 100Ω	90W	30 Sec Max.	±100	-55°C to +200°C
NEW CWFS35	5	+180°C	4.7Ω - 100Ω	150W	30 Sec Max.	±100	


Rated voltage=  $\sqrt{\text{Power Rating} \times \text{Resistance value}}$

## environmental applications

### Derating Curve

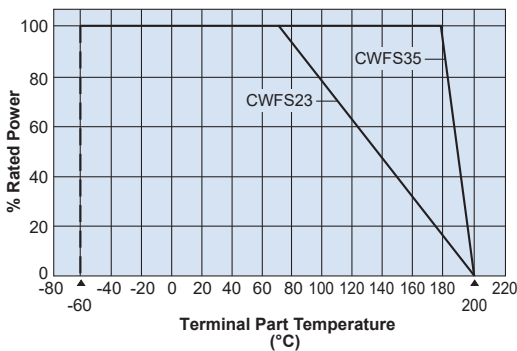


### Temperature Rise (Ref.)

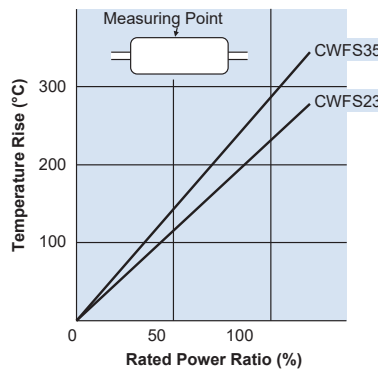

Fixing Board  $t=1.2$  Material: Glass Epoxy Board

## Performance Characteristics


Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	$\pm 100 \times 10^{-6}/K$	—	+25°C/-55°C and +25°C/+125°C
Melt Time	30 seconds	4 seconds	Power rating x 30
Overload (Short Time)	5%	2%	Rated rating x 10, 5 seconds
Resistance to Solder Heat	1%	0.8%	350°C $\pm$ 10°C for 3.5 seconds or 260°C $\pm$ 5°C for 10 seconds
Moisture Resistance	5%	4%	Power rating x 1/10, 40°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance of Rated Terminal Part Temperature	5%	3%	CWFS23: 120°C $\pm$ 2°C; CWFS35: 180°C $\pm$ 2°C 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Resistance to Solvent	No abnormality in appearance such as disappearance of making, etc.	—	On immersing the sample in IPA for 3 min., the resistor surface should be lightly wiped with a dry cloth (velvet or gauze)

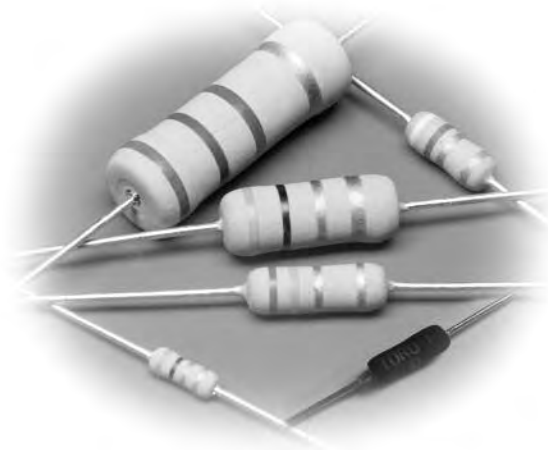

## features

- Flameproof silicone coating equivalent (UL94V0)
- CWH resistors meet MIL-PRF-26 (U characteristics)
- CWH high precision resistors with T.C.R. less than  $\pm 50 \times 10^{-6}/K$
- Suitable for automatic machine insertion
- Various types of formings are available
- Excellent in pulse characteristic
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- CW1SS has UL1412 approval (File No. E320246)
- Surface mount style "N" forming is suitable for automatic mounting CW, CWP

## dimensions and construction

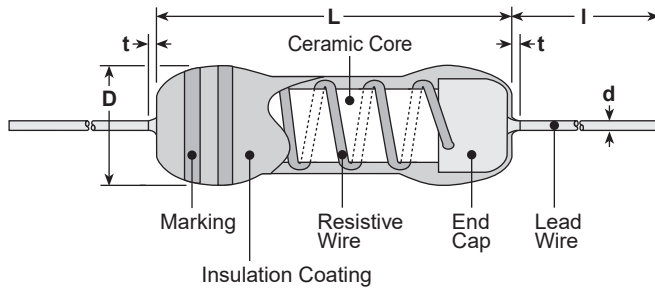

Type	Dimensions inches (mm)				
	L	t (max.)	D	d (nom.)	I*
CW1/4	.13±.012 (3.3±0.3)	.02 (0.5)	.075±.012 (1.9±0.3)	.018 (0.45)	1.18±.118 (30.0±3.0)
CW1/2	.256±.039 (6.5±1.0)	.039 (1.0)	.098±.039 (2.5±1.0)	.024 (0.6)	
CW1	.354±.039 (9.0±1.0)	.118 (3.0)	.138±.039 (3.5±1.0)	.031 (0.8)	
CW1X			.138 <sup>+.006</sup> <sub>-0</sub> (3.5 <sup>+1.5</sup> <sub>-0</sub> )		
CW1P			.138±.039 (3.5±1.0)		
CW2	.157±.039 (4.0±1.0)				
CW2X	.472±.039 (12.0±1.0)		.157 <sup>+.006</sup> <sub>-0</sub> (4.0 <sup>+1.5</sup> <sub>-0</sub> )		
CW2P	.157±.039 (4.0±1.0)				
CW3	.591±.039 (15.0±1.0)		.236±.039 (6.0±1.0)		
CW3X			.236 <sup>+.006</sup> <sub>-0</sub> (6.0 <sup>+1.5</sup> <sub>-0</sub> )		
CW3P			.236±.039 (6.0±1.0)		
CW5	.945±.006 (24.0±1.5)		.354±.006 (9.0±1.5)		1.50±.118 (38.0±3.0)
CW1S	.256±.039 (6.5±1.0)	.039 (1.0)	.098±.039 (2.5±1.0)	.024 (0.6)	1.18±.118 (30.0±3.0)
CW1SS					
CW1H	.354±.039 (9.0±1.0)	.118 (3.0)	.138±.039 (3.5±1.0)	.031 (0.8)	1.18±.118 (30.0±3.0)
CW2H	.472±.039 (12.0±1.0)		.157±.039 (4.0±1.0)		
CW3H	.591±.039 (15.0±1.0)		.236±.039 (6.0±1.0)		

\* Lead length changes depending on taping and forming type.



## ordering information

CW	1/2	P	C	T52	A	103	F
Type	Power Rating	Style	Termination Material	Taping and Forming	Packaging	Nominal Resistance	Tolerance
	1/4: 0.25W 1/2: 0.5W 1: 1W 2: 2W 3: 3W 5: 5W	H: Stability Nil: Power P: Precision S: Small X: Power SS: Small type, UL Approved	C: SnCu	Axial: T26, T52, T521, T631 Stand-off Axial: L52A, L52B Radial: VTP*, GT L forming: L12.5A, L15A, L20A, L25A N forming: N17, N20	A: Ammo R: Reel TEB: TEG: Embossed plastic (N forming)	±2%, ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω ±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	C: ±0.25% D: ±0.5% F: ±1% G: ±2% J: ±5% K: ±10%

For further information  
on packaging, please  
refer to Appendix C.

\* VTP: Applicable to 0.47Ω or  
over for CW1, CW1P only


## applications and ratings

Part Designation	Power Rating	T.C.R. (ppm/°C) Max.	Resistance Range (Ω)					Rated Ambient Temperature	Operating Temperature Range	
			E-24, E-96 (C±0.25%)	E-24, E-96 (D±0.5%)	E-24, E-96 (F±1%)	E-24 (G±2%)	E-24 (J±5%)			E-24 (K±10%)
CW1/4	0.25W	±250	—	—	—	—	0.47 - 15	0.47 - 15	+70°C	-40°C to +155°C
CW1/2	0.5W						0.1 - 100	0.1 - 100		
CW1	1.0W						0.1 - 390	0.1 - 390		
CW2	2.0W						0.1 - 390	0.1 - 390		
CW3	3.0W						0.1 - 390	0.1 - 390		
CW5	5.0W						0.1 - 390	0.1 - 390		
CW1X	1.0W	±500	—	—	—	0.01 - 0.091	0.01 - 0.091			
CW2X	2.0W					0.01 - 0.091	0.01 - 0.091			
CW3X	3.0W					0.01 - 0.091	0.01 - 0.091			
CW1S	1.0W	±250	—	—	—	—	0.1 - 100	0.1 - 100		
CW1SS	1.0W	±100	—	—	—	—	10	—		
CW1P	1.0W	±90: R≥10Ω* ±50: R<10Ω	1 - 100	0.47 - 220	0.1 - 430	—	—	—		
CW2P	2.0W		1 - 390	0.47 - 390	0.1 - 390					
CW3P	3.0W		1 - 390	0.47 - 390	0.1 - 390					
CW1H	1.0W	±20: R≥10Ω ±50: R<10Ω	—	0.47 - 220	0.1 - 430	—	—	—	+25°C	-55°C to +275°C
CW2H	2.0W			0.47 - 750	0.1 - 2k					
CW3H	3.0W			0.47 - 1k	0.1 - 3k					

\* T.C.R. = 20ppm/°C available on request CW\_H: Max. Working Voltage:  $E = \sqrt{P \times R}$  CW\_H: Max. Overload Voltage:  $E = \sqrt{P \times R \times 5}$

## environmental applications

### Derating Curve

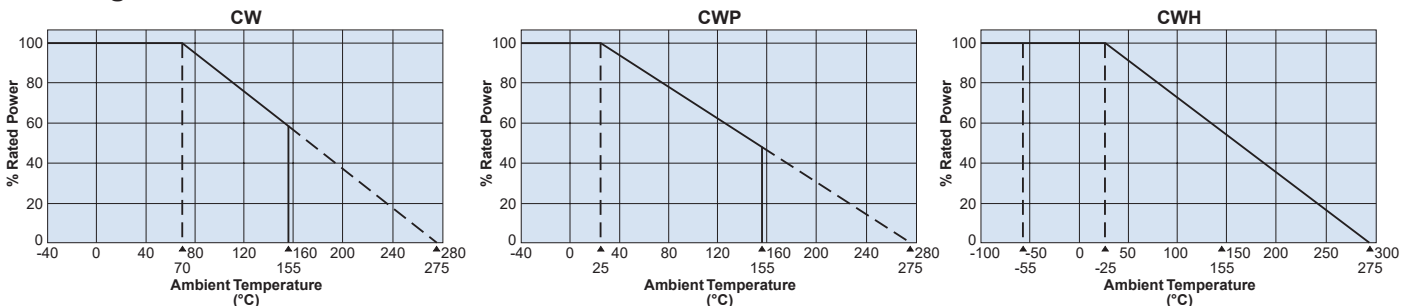


For resistors operated at an ambient temperature of 25°C or above, a power rating shall be derated in accordance with the above derating curve.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

1/03/17

## environmental applications

### Surface Temperature Rise

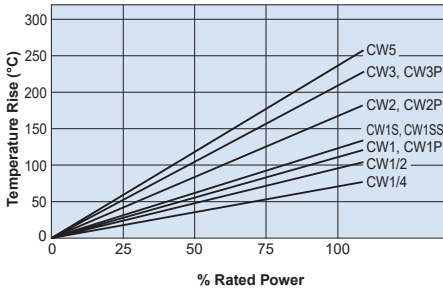

Fixing board:  $t=1.2$   
Material: Glass epoxy board

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	CW: +25°C/+125°C CWP: +25°C/-40°C and +25°C/+155°C CWH: +25°C/-55°C and +25°C/+125°C
Overload (Short Time)	1%: CW, CWX 0.5%: CWP 2%: CW1S, CW1SS 0.2%: CWP(R<10Ω)*, CWH	0.8%: CW, CWX 0.4%: CWP 1.8%: CW1S, CW1SS 0.18%: CWP(R<10Ω) 0.15%: CWH	CW, CWX, CW1S, CW1SS: Power rating x 10 for 5 seconds CWP: Power rating x 6.25 for 5 seconds CWP (R<10Ω), CWH: Power rating x 5 for 5 seconds
Resistance to Solder Heat	1%: CW, CW1S, CW1SS, CWX 0.5%: CWP 0.2%: CWP (R<10Ω)*, CWH	0.8%: CW, CW1S, CW1SS, CWX 0.4%: CWP 0.18%: CWP (R<10Ω) 0.15%: CWH	350°C ± 10°C for 3.5 seconds or 260°C ± 5°C for 10 seconds
Moisture Resistance	5%: CW, CW1S, CWX 2%: CWP 0.5%: CWP (R<10Ω)*	4%: CW, CW1S, CWX 1.6%: CWP 0.45%: CWP (R<10Ω)	Power rating x 1/10, 40°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance @ 70°C	5%: CW, CW1S, CW1SS, CWX 2%: CWP 0.5%: CWP (R<10Ω)*	4%: CW, CW1S, CW1SS, CWX 1.6%: CWP 0.45%: CWP (R<10Ω)	70°C, 1000 hours (CW, CWX, CW1S, CW1SS), 25°C, 1000 hours (CWP) 1.5 hr ON, 0.5 hr OFF cycle
Resistance to Solvent	No evidence of damage to protective coating and marking	—	After immersing the sample in IPA for 3 min., the resistor surface should be wiped with a dry cloth (velvet or gauze)
Low Temperature	0.2%: CWH	0.15%: CWH	-65°C, 24 hours
High Temperature	0.5%: CWH	0.45%: CWH	+275°C, 250 hours
Thunder Surge	3%: CW1SS	—	Combination wave, +1.5kV 20 seconds 3 cycles
Load Life	0.5%: CWH	0.45%: CWH	-25°C, power rating, 1.5 hr ON, 0.5 hr OFF 2000 hours


\* Refer to MIL-PRF-26G standard

## coat-insulated miniature precision power wirewound resistors




### features

- Resistors meeting MIL-R-26E (U and V characteristics) and surface temperature (hot spot) 350°C max.
- Resistors with a wide range of 0.1Ω ~ 62kΩ, covering applications from precision to power
- RW□N type resistors are non-inductive wound and can be used in high frequency applications.
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

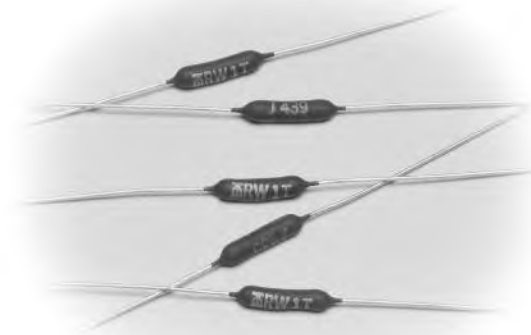

### dimensions and construction

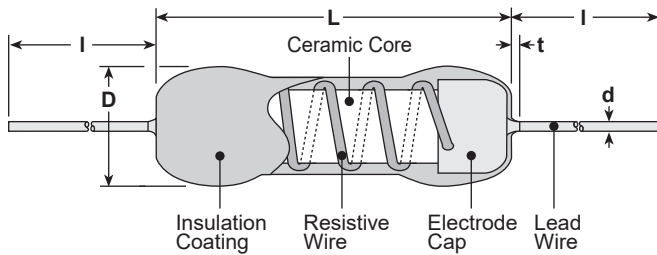

Type	Dimensions inches (mm)			
	L	D	d (nom.)	l
RW1/2, RW1/2N	.315±.039 (8.0±1.0)	.138 <sup>+.039</sup> <sub>-0</sub> (1.6 <sup>±1.0</sup> <sub>-0</sub> )	.020 (0.5)	1.50±.118 (38.0±3.0)
RW1, RW1N	.413±.039 (10.5±1.0)	.106±.039 (2.7±1.0)		
RW2, RW2N	.512±.039 (13.0±1.0)	.205±.039 (5.2±1.0)	.031 (0.8)	
RW3, RW3N	.650±.039 (16.5±1.0)	.252±.039 (6.4±1.0)		
RW5, RW5N	.866±.039 (22±1.0)	.307±.059 (7.8±1.5)	.039 (1.0)	
RW7, RW7N	1.24±.039 (31.5±1.0)			
RW10, RW10N	1.81±.059 (46.0±1.5)	.366±.089 (9.3±1.5)		

### ordering information

Pb Free Type

<b>RW</b>	<b>1/2</b>	<b>N</b>	<b>T</b>	<b>103</b>	<b>J</b>
Type	Power Rating	Winding Method	Termination Material	Nominal Resistance	Tolerance
	1/2: 0.5W 1: 1W 2: 2W 3: 3W 5: 5W 7: 7W 10: 10W	Nil: Standard winding N: Non-inductive winding	T: Sn	±3%, ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω ±0.5%, ±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	D: ±0.5% F: ±1% H: ±3% J: ±5%

Packaging quantity:  
RW1/2 ~ RW1: 1,000 pieces  
RW2 ~ RW7: 500 pieces  
RW10: 300 pieces

## applications and ratings


Part Designation	Power Rating		Resistance Range ( $\Omega$ )				T.C.R. (ppm/ $^{\circ}$ C)	Max. Working Voltage	Max. Overload Voltage
	U	V	D $\pm$ 0.5% (E24 • E96 25x10 <sup>0</sup> •50x10 <sup>0</sup> )	F $\pm$ 1% (E24 • E96 25x10 <sup>0</sup> •50x10 <sup>0</sup> )	H $\pm$ 3% (E24 & 25x10 <sup>0</sup> •50x10 <sup>0</sup> )	J $\pm$ 5% (E24 & 25x10 <sup>0</sup> •50x10 <sup>0</sup> )			
RW1/2	0.5W	—	10 - 2.61k	10 - 2.61k	0.47 - 2.7k	0.47 - 2.7k	+20/-50: R $\geq$ 10 $\Omega$  +50/-70: 10 $\leq$ R<10 $\Omega$  +400/-90: R<1 $\Omega$	80V	150V
RW1/2N			—	10 - 2.37k	10 - 2.4k	10 - 2.4k			
RW1	1.0W	—	1 - 5.11k	1 - 5.11k	0.1 - 5.1k	0.1 - 5.1k		130V	300V
RW1N			—	10 - 3.74k	10 - 3.6k	10 - 3.6k			
RW2	2.0W	3.0W	1 - 10k	1 - 10k	0.1 - 10k	0.1 - 10k		140V	500V
RW2N			—	15 - 10k	10 - 10k	10 - 10k			
RW3	3.0W	5.0W	1 - 15k	1 - 15k	0.1 - 15k	0.1 - 15k		200V	600V
RW3N			—	15 - 15k	15 - 15k	15 - 15k			
RW5	5.0W	7.0W	1 - 30.1k	1 - 30.1k	0.1 - 30k	0.1 - 30k		400V	700V
RW5N			—	20 - 29.4k	20 - 30k	20 - 30k			
RW7	7.0W	10W	1 - 45.3k	1 - 45.3k	0.1 - 47k	0.1 - 47k	600V	800V	
RW7N			—	36 - 44.2k	36 - 43k	36 - 43k			
RW10	10W	14W	1 - 60.4k	1 - 60.4k	0.1 - 62k	0.1 - 62k	1000V	1500V	
RW10N			—	62 - 49.9k	62 - 51k	62 - 51k			

Operating Temperature Range: Characteristic U: -55 $^{\circ}$ C ~ +275 $^{\circ}$ C, V: -55 $^{\circ}$ C ~ +350 $^{\circ}$ C


leaded resistors

## environmental applications


### Derating Curve

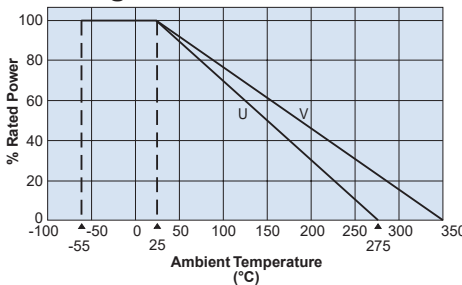

### Surface Temperature Rise

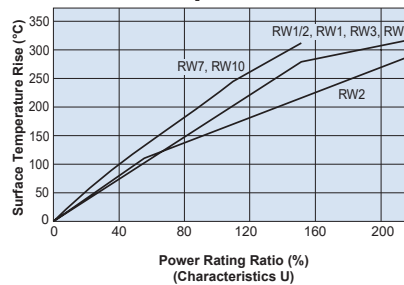

### Frequency Characteristics

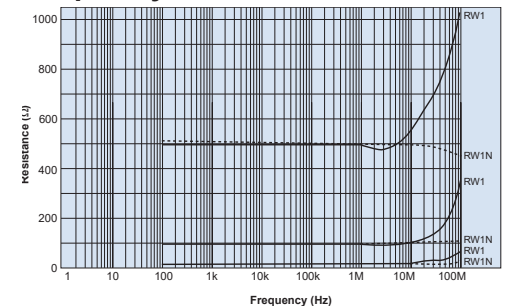


## Performance Characteristics

Parameter	Requirement $\Delta$ R $\pm$ (% + 0.05 $\Omega$ )	Test Method
Resistance	Within regulated tolerance	25 $^{\circ}$ C
T.C.R.	Within specified T.C.R.	+25 $^{\circ}$ C/-55 $^{\circ}$ C, +25 $^{\circ}$ C/+125 $^{\circ}$ C
Overload (Short time)	0.2%: U	Rated power x 5 or Max. overload voltage, whichever is lower for 5 seconds
	2%: V	Rated power x 10 or Max. overload voltage, whichever is lower for 5 seconds
Resistance to Solder Heat	0.1%	350 $^{\circ}$ C $\pm$ 10 $^{\circ}$ C, 3 seconds $\pm$ 0.5 seconds or 260 $^{\circ}$ C $\pm$ 5 $^{\circ}$ C, 10 seconds $\pm$ 1 second
Moisture Resistance	0.2%: U 2%: V	Power rating x 1/10, 40 $^{\circ}$ C, 90 - 95% RH, 1000 hours, 1.5 hr ON/0.5 hr OFF cycle
Endurance @ 25 $^{\circ}$ C	0.5%: U 3%: V	25 $^{\circ}$ C, 2000 hours 1.5 hr ON/0.5 hr OFF cycle
High Temperature Exposure	0.2%: U	275 $^{+5}_{-0}$ $^{\circ}$ C, 250 hours
	2%: V	350 $^{+5}_{-0}$ $^{\circ}$ C, 250 hours

rectangular type wirewound resistors with glass core  
 rectangular type wirewound resistors with ceramic core  
 rectangular type metal oxide film resistors

## features

- High power resistors
- Uses flame-retardant insulated ceramic case
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- Excellent in anti-pulse and in rush current

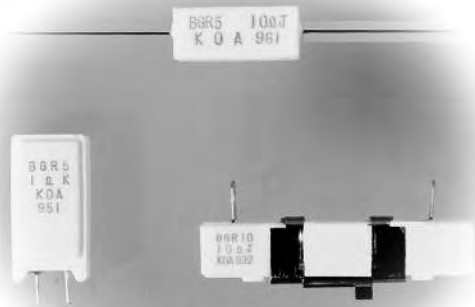

Leadless resistors

## applications and ratings

Type	Power Rating	Resistance Range (Ω) E24				Style & Weight (g/1 piece)													
		F±1%	G±2%	J±5%	K±10%	S	N	E	P	X	Y	YS	Z	H	Q	HA	HB	QA	QB
BWR1	1W	1~56	0.22~75	0.1~75	—	1.3	—	—	—	—	—	—	—	—	—	—	—	—	—
BWR2	2W	1~160	0.22~200	0.1~200	—	2.1	3.9	—	—	—	—	—	—	—	—	—	—	—	—
BWR3	3W	1~300	0.22~390	0.1~390	—	3.9	5.9	—	—	—	—	—	—	—	—	—	—	—	—
BWR5	5W	1~300	0.22~390	0.1~390	—	5.1	7.2	5.7	5.6	—	—	—	—	—	—	—	—	—	—
BWR7	7W	1~360	0.22~390	0.1~390	—	7.5	10.8	—	—	—	—	—	—	—	—	—	—	—	—
BWR10	10W	1~390	0.22~390	0.1~390	—	10.2	15.0	—	—	—	—	—	—	—	—	—	—	—	—
BWR15	15W	1~390	0.22~390	0.1~390	—	18.8	—	—	—	—	—	—	—	—	—	—	—	—	—
BWR20	20W	1~390	0.22~390	0.1~390	—	23.3	—	—	—	—	—	—	—	—	—	—	—	—	—
BGR5	5W	—	—	10~390	0.39~9.1	—	—	—	—	6.1	7.6	6.6	7.6	—	—	—	—	—	—
BGR7	7W	—	—	10~390	0.39~9.1	—	—	—	—	8.2	9.1	7.8	9.1	—	—	—	—	—	—
BGR10	10W	—	—	10~390	0.39~9.1	—	—	—	—	11.0	12.4	10.4	11.4	9.9	—	13.6	—	—	—
BGR15	15W	—	—	10~390	0.51~9.1	—	—	—	—	18.8	—	—	20.5	18.4	18.6	24.4	27.5	24.6	27.7
BGR20	20W	—	—	10~390	0.51~9.1	—	—	—	—	22.3	—	—	24.0	21.9	22.1	27.9	31.0	28.1	31.3
BGR30	30W	—	—	10~390	2.2~9.1	—	—	—	—	—	—	—	—	59.3	59.6	73.9	73.5	74.2	73.8
BGR40	40W	—	—	10~390	2.2~9.1	—	—	—	—	—	—	—	—	70.4	70.6	85.0	84.6	85.2	84.8
BSR2	2W	—	—	430~13k	—	2.1	3.8	—	—	—	—	—	—	—	—	—	—	—	—
BSR3	3W	—	—	430~27k	—	3.9	5.9	—	—	—	—	—	—	—	—	—	—	—	—
BSR5	5W	—	—	430~39k	—	5.1	7.2	5.7	—	6.1	7.6	6.6	7.6	—	—	—	—	—	—
BSR7	7W	—	—	430~56k	—	7.4	10.8	—	—	8.2	9.1	7.8	9.1	—	—	—	—	—	—
BSR10	10W	—	—	430~75k	—	10.2	15.0	—	—	11.0	12.4	10.4	11.4	10.9	—	13.7	—	—	—
BSR15	15W	—	—	430~56k	—	18.8	—	—	—	18.5	—	—	20.5	18.4	18.6	24.4	27.5	24.6	27.7
BSR20	20W	—	—	430~56k	—	23.3	—	—	—	22.0	—	—	24.0	21.9	22.1	27.9	31.0	28.1	31.3

Type	Power Rating	Max. Working Voltage (V)		Max. Overload Voltage (V)		T.C.R. (x10 <sup>-6</sup> /K)			Rated Ambient Temperature	Operating Temperature Range						
		BSR	BGR,BWR	BSR	BGR,BWR	BWR	BSR	BGR								
BWR1	1W	—	E=√P•R	—	E=√P•R•10	±100	±300	±250	+70°C	-40°C to +155°C						
B□R2	2W	250		500												
B□R3	3W	300		600												
B□R5	5W	350		700												
B□R7	7W	500		1000												
B□R10	10W	700		1400												
B□R15	15W	700		1400												
B□R20	20W	750		1500												
BGR30	30W	—		—							—	—	—	—	+25°C	
BGR40	40W	—		—							—	—	—	—		

Rated voltage= √Power Rating × Resistance value or Max. working voltage, whichever is lower.  
 □ Represents the space to designate product type via character G, W, or S.

rectangular type wirewound resistors with glass core  
 rectangular type wirewound resistors with ceramic core  
 rectangular type metal oxide film resistors

## ordering information

BWR	3	C	N	100	J
<b>Type</b>	<b>Power Rating</b>	<b>Termination<sup>1</sup> Material</b>	<b>Style</b>	<b>Nominal Resistance</b>	<b>Tolerance</b>
BGR: Wirewound (glass core) BWR: Wirewound (ceramic core) BSR: Metal oxide film	See table	C: SnCu	Blank: S style <sup>2</sup> N: N style E: E style P: P style	+1%: 3 significant figures + 1 multiplier "R" indicates decimal on values <100Ω +2%, +5%, +10%: 2 significant figures + 1 multiplier "R" indicates decimal on values <10Ω	F: ±1% G: ±2% J: ±5% K: ±10%
		T: Sn	X: X style Y: Y style YS: YS style Z: Z style H: H style Q: Q style HA: HA style HB: HB style QA: QA style QB: QB style		

<sup>1</sup> Lead-Free plated terminal symbols.

C (SnCu) N, E, S and P styles


T (Sn) X, Y, YS, Z, H and Q styles

<sup>2</sup> No indication on style means S style.

leaded resistors


## dimensions and construction

### S Style

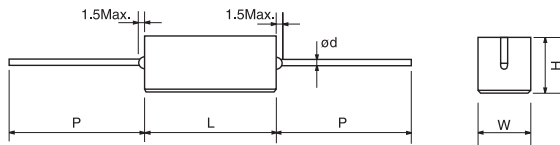


Type	Dimensions millimeters				
	L	W	H	P	D
BWR1	13.0±1.0	5.5±1.0	5.5±1.0	30.0±3.0	0.6±0.1
BWR2, BSR2	18.0±1.5	6.3±1.0	6.3±1.0	35.0±3.0	0.8±0.1
BWR3, BSR3	22.0±1.5	8.0±1.0	8.0±1.0		
BWR5, BSR5		9.5±1.0	9.5±1.0		
BWR7, BSR7	35.0±1.5			12.5±1.2	12.5±1.2
BWR10, BSR10	48.0±1.5				
BWR15, BSR15	63.5±1.5	12.5±1.5	12.5±1.5		

### N Style



### E Style




Type	Dimensions millimeters			
	W±1	D±1	H±1.5	P <sup>+2</sup> <sub>-1</sub>
BWR2N, BSR2N	11	7	20.5	5
BWR3N, BSR3N	12	8	25	
BWR5N, BSR5N	13	9	25.5	
BWR7N, BSR7N			38.5	
BWR10N, BSR10N	16	12	35	7.5
BWR5E, BSR5E	9.5	9.5	23.5	5




rectangular type wirewound resistors with glass core  
rectangular type wirewound resistors with ceramic core  
rectangular type metal oxide film resistors

## dimensions and construction (continued)


### X Style (5W, 10W)




### (15W, 20W)



### Y Style




### YS Style



Type	Dimensions millimeters			
	L±1.5	W±1.0	H±1.0	P±1.5
BGR5X, BSR5X, BGR5Y, BSR5Y, BGR5YS, BSR5YS	27	9.5	9.5	15
BGR7X, BSR7X, BGR7Y, BSR7Y, BGR7YS, BSR7YS	35			22.5
BGR10X, BSR10X, BGR10Y, BSR10Y, BGR10YS, BSR10YS	48	12.5	12.5	35
BGR15X, BSR15X	63.5			32.5
BGR20X, BSR20X				47.5


### P Style

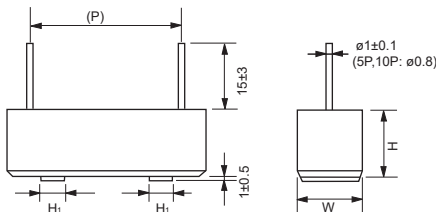


Type	Dimensions millimeters				
	L	W	H	H <sub>1</sub>	(P)
BWR5P	23.0±1.5	9.5±1.5	9.5±1.5	—	20

Parenthesized dimensions are for reference.  
Please refrain from using these parts as a board-insertion type.  
\* Soldering only does not allow enough joint strength.  
Additional fixation is recommended.

### Z Style (5W, 10W)




### (15W, 20W)

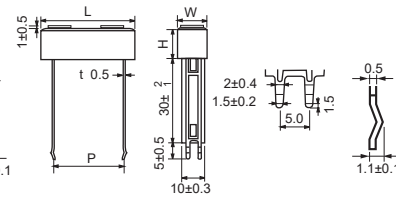


Type	Dimensions millimeters			
	L±1.5	W±1.0	H±1.0	P
BGR5Z, BSR5Z	27	9.5	9.5	15 <sup>+6</sup> / <sub>-2</sub>
BGR7Z, BSR7Z	35			22.5 <sup>+6</sup> / <sub>-2</sub>
BGR10Z, BSR10Z	48	12.5	12.5	35 <sup>+6</sup> / <sub>-2</sub>
BGR15Z, BSR15Z	63.5			32.5 <sup>+4</sup> / <sub>-0</sub>
BGR20Z, BSR20Z				47.5 <sup>+4</sup> / <sub>-0</sub>




### H Style



### Q Style



### H Style



Type	Dimensions millimeters											
	L	L <sub>1</sub>	L <sub>2</sub>	W	W <sub>1</sub>	H	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	(P)	t	øh <sub>1</sub>
BGR10H, BSR10H	48.0±1.5	25.0±1.0	4.5	9.5±1.0	5	9.5±1.0	6.0 <sup>+2</sup> / <sub>-0</sub>	16.5 <sup>+2</sup> / <sub>-1</sub>	—	35	0.4	2.0
BGR15H, BSR15H			7.0	12.5±1.2	6	12.5±1.5	7.5 <sup>+2</sup> / <sub>-0</sub>	21.0 <sup>+2</sup> / <sub>-1</sub>		32.5		
BGR20H, BSR20H			63.5±2.0	7.0	12.5±1.2	6	12.5±1.5	7.5 <sup>+2</sup> / <sub>-0</sub>		21.0 <sup>+2</sup> / <sub>-1</sub>		
BGR30H	75.0±2.5	40.0±1.2	10.0	19.0±1.5	7.5	19.0±1.5	10.0 <sup>+2</sup> / <sub>-0</sub>	30.0 <sup>+2.5</sup> / <sub>-1.5</sub>	—	56	0.5	3.0
BGR40H	90.0±2.5		10.0	19.0±1.5	7.5	19.0±1.5	10.0 <sup>+2</sup> / <sub>-0</sub>	30.0 <sup>+2.5</sup> / <sub>-1.5</sub>		71		
BGR15Q, BSR15Q	48.0±1.5	25.0±1.0	7.0	12.5±1.2	4.75	12.5±1.5	12.0 <sup>+2</sup> / <sub>-0</sub>	25.0 <sup>+2</sup> / <sub>-1</sub>	6.35	32.5	—	—
BGR20Q, BSR20Q	63.5±2.0		7.0	12.5±1.2	4.75	12.5±1.5	12.0 <sup>+2</sup> / <sub>-0</sub>	25.0 <sup>+2</sup> / <sub>-1</sub>		47.5		


Parenthesized dimensions are for reference.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


11/05/18

## dimensions and construction (continued)

HA, QA Style



HB, QB Style

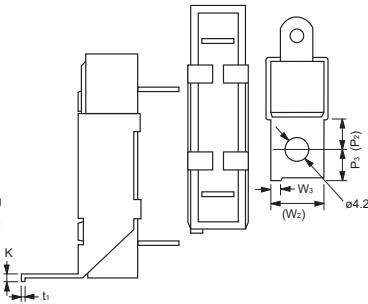



Type	Dimensions millimeters					t <sub>1</sub>
	(P <sub>2</sub> )	P <sub>3</sub>	(W <sub>2</sub> )	W <sub>3</sub>	K	
BGR10HA, BSR10HA	8.0	6.0±1.0	12.0	3.0±0.3	2.8±0.3	0.6
BGR15HA, BGR15QA, BGR15HB, BSR15HB, BGR15QB, BSR15QA, BSR15QB						0.8
BGR20HA, BSR20HA, BGR20QA, BGR20HB, BSR20HB, BGR20QB, BSR20QA, BSR20QB						0.8
BGR30HA, BGR30HB						0.8
BGR40HA, BGR40HB	10.0	8.0±1.0	18.0	3.0±0.3	3.0±0.3	0.8

Parenthesized dimensions are for reference.


leaded resistors

## Derating Curve


S Style

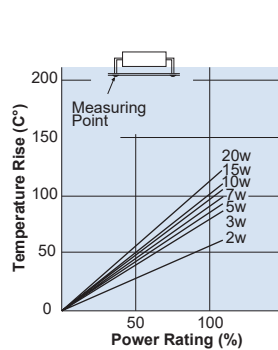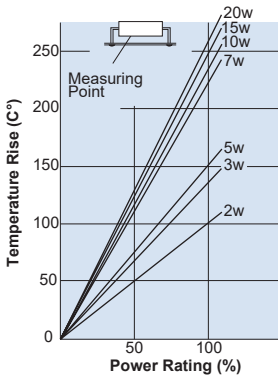


N Style

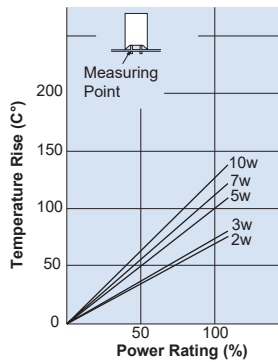


E Style

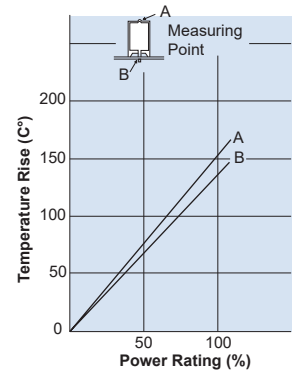


X Style




Y Style





YS Style



Z Style



H, Q Style

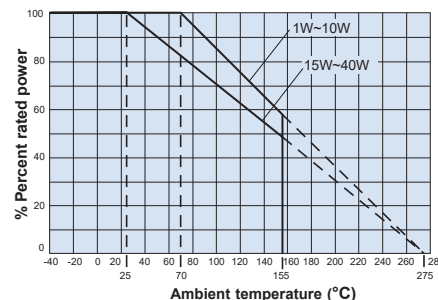

## environmental applications

### Performance Characteristics

Parameter	Requirement $\Delta R \pm\%$		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Resistance to Solder Heat	1%: BWR, BSR 2%: BGR	0.8%: BWR 1.7%: BGR 0.9%: BSR	350°C $\pm$ 10°C for 3.5 seconds
Moisture Resistance	3%: BWR, BGR 5%: BSR	2.4%: BWR 2.55%: BGR 4.5%: BSR	Power rating x 1/10, 40°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance @ 70°C	3%: BWR 5%: BGR, BSR	2.4%: BWR 4.25%: BGR 4.5%: BSR	Rated voltage, 70°C, 1000 hours, 1.5 hours ON/ 0.5 hours OFF cycle



## features

- High power resistors
- Uses flame-retardant insulated ceramic case
- Excellent in anti-pulse and in rush current
- Suitable for high reliable applications like automotives
- AEC-Q200 qualified.
- Products meet EU RoHS requirements



## applications and ratings

Type	Power Rating	Resistance Range (Ω) E24	
		J±5%	K±10%
BGRV7	7W	10~390	5.1~9.1
BGRV10	10W	10~390	5.1~9.1
BGRV15	15W	10~390	5.1~9.1
BGRV20	20W	10~390	5.1~9.1
BGRV30	30W	10~390	5.1~9.1
BGRV40	40W	10~390	5.1~9.1
BSRV5	5W	430~51k	—
BSRV7	7W	430~56k	—
BSRV10	10W	430~75k	—
BSRV15	15W	430~56k	—
BSRV20	20W	430~56k	—

Type	Power Rating	Rated Ambient Temperature	Max. Working Voltage (V)		Max. Overload Voltage (V)		T.C.R. (x10 <sup>-6</sup> /K)		Operating Temperature Range
			BSRV	BGRV	BSRV	BGRV	BSRV	BGRV	
BSRV5	5W	+70°C	350	E=√P•R	700	E=√P•R•10	±300	±250	-40°C to +155°C
B□RV7	7W		500		1000				
B□RV10	10W		700		1400				
B□RV15	15W		700		1400				
B□RV20	20W	+25°C	750	1500	—	—			
BGRV30	30W	—	—						
BGRV40	40W	—	—						

Rated voltage=  $\sqrt{\text{Power Rating} \times \text{Resistance value}}$  or Max. working voltage, whichever is lower.

Please consult with us in advance about custom-made products.

## ordering information

<b>BGRV</b>	<b>30</b>	<b>T</b>	<b>Q</b>	<b>100</b>	<b>J</b>
<b>Type</b>	<b>Power Rating</b>	<b>Termination<sup>1</sup> Surface Material</b>	<b>Style</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
BGRV: Wirewound (glass core) BSRV: Metal oxide film	See table	T: Sn	Q: Q style	J, K: 3 digits	J: ±5% K: ±10%

<sup>1</sup> Lead-Free plated terminal symbols.


T (Sn): Q style

Contact us when you have control request for environmental hazardous material other than the substance specified by EU-RoHS.

leaded resistors

## dimensions and construction


### Q Style

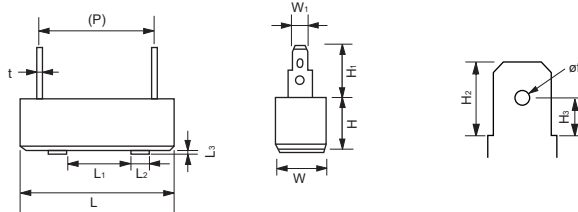

Type	Dimensions millimeters												
	L	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	W	W <sub>1</sub>	H	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	(øf)	(P)	t
BSRV5Q	27±1.5	—	—	—	9.5±1.0	4.75	9.5±1.0	10.5±1.0	6.5	3.3	2.2	15.0	0.5
BGRV7Q, BSRV7Q	35±1.5											22.5	
BGRV10Q, BSRV10Q	48±1.5	25±1.0	4.5	1.0±0.5	12.5±1.2		12.5±1.5	13.0±1.0	6.35	3.15	1.4	35.0	0.8
BGRV15Q, BSRV15G	48±1.5		7									34.5	
BGRV20Q, BSRV20Q	63.5±2											49.5	
BGRV30Q	75±2.5	40±1.2	10		19.0±1.5	6.3	19.0±1.5	12.0±1.0	8.0	4.1	1.7	56.0	
BGRV40Q	90±2.5											71.0	

Parenthesized dimensions are for reference.


## Derating Curve

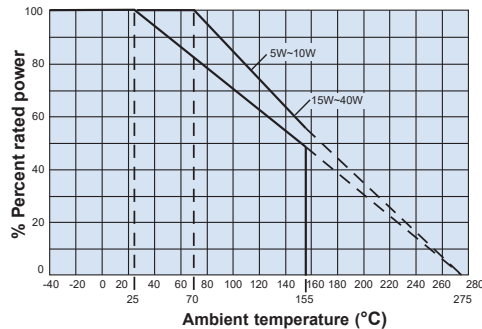

## environmental applications

### Performance Characteristics


Parameter	Requirement $\Delta R \pm\%$		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Resistance to Solder Heat	1%: BSRV 2%: BGRV	1.0%: BGRV 0.5%: BSRV	350°C ± 10°C for 3.5 seconds
Moisture Resistance	3%: BGRV 5%: BSRV	2.0%: BGRV 2.0%: BSRV	Power rating x 1/10, 40°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance @ 25°C and 70°C	5%: BGRV, BSRV	2.5%: BGRV 2.5%: BSRV	Power according to the derating curve, 25°C and 70°C, 1000 hours, 1.5 hours ON/0.5 hours OFF cycle



### features


- Power type current detecting resistors
- Flame retardant resistors in ceramic case
- Automatic insertion for a 5mm pitch between terminals is applicable (26 type, 58 type)
- Low inductance
- Space saving
- Marking: Alpha/numeric marking
- Products with lead-free terminations meet EU RoHS requirements

### dimensions and construction

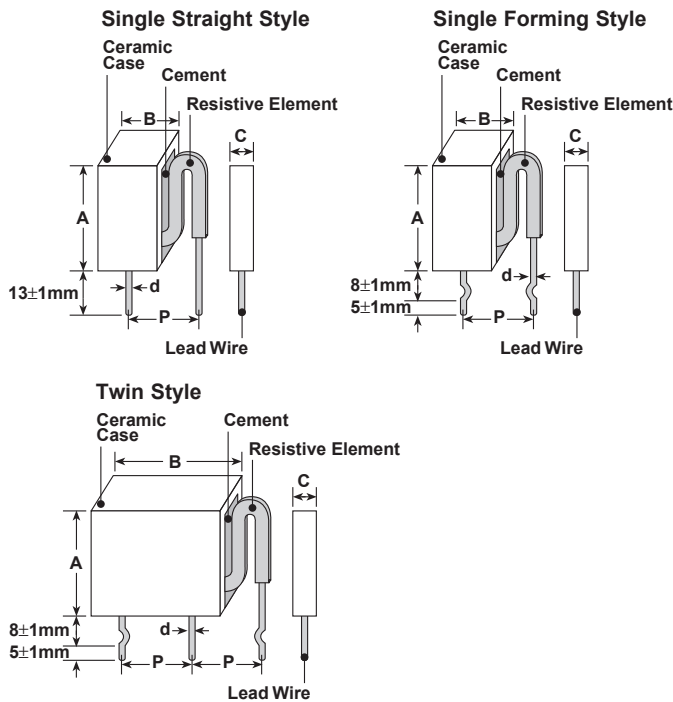

Size Code	Dimensions inches (mm)				
	A	B	C	d	P
BPR26	.335±.04 (8.5±1.0)	.512±.04 (13.0±1.0)	.157±.04 (4.0±1.0)	.024±.04 (0.6±1.0)	.354±.04 (9.0±1.0)
BPR28	.335±.04 (8.5±1.0)	.512±.04 (13.0±1.0)	.157±.04 (4.0±1.0)	.031±.04 (0.8±1.0)	.354±.04 (9.0±1.0)
BPR38	.512±.04 (13.0±1.0)	.551±.04 (14.0±1.0)		.031±.04 (0.8±1.0)	.354±.04 (9.0±1.0)
BPR58	.709±.04 (18.0±1.0)	.551±.04 (14.0±1.0)		.031±.04 (0.8±1.0)	.354±.04 (9.0±1.0)
BPR108	.669±.06 (17.0±1.5)	1.02±.06 (26.0±1.5)	.197±.04 (5.0±1.0)	.031±.04 (0.8±1.0)	.787±.04 (20.0±1.0)
BPR55	.669±.06 (17.0±1.5)	1.02±.06 (26.0±1.5)		.031±.04 (0.8±1.0)	.394±.04 (10.0±1.0)
BPR77	.787±.07 (20.0±1.8)	1.02±.06 (26.0±1.5)		.031±.04 (0.8±1.0)	.394±.04 (10.0±1.0)

### Derating Curve

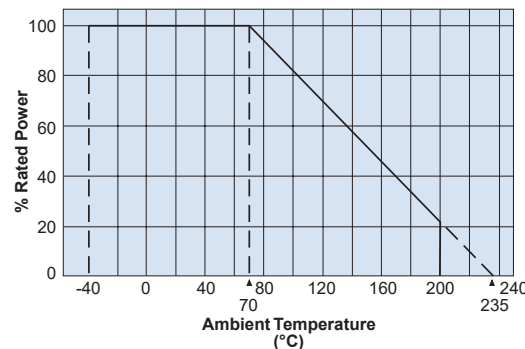

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

### ordering information

BPR	5	8	C	F	R10	J
Type	Power Rating	Lead Wire Diameter	Termination Material	Packaging	Nominal Resistance	Tolerance
	2: 2W 3: 3W 5: 5W	6: ø0.6mm 8: ø0.8mm	C: SnCu	Blank: Straight lead (9.0mm pitch) F: Forming (9.0mm pitch) FT: Radial taping (BPR26FT, BPR58FT only, 5.0mm pitch)	2 significant figures +1 multiplier. "R" indicates decimal on value <10Ω. All values less than 0.1Ω are expressed in mΩ with "L" as decimal. Ex: 20mΩ - 20L	J: ±5% K: ±10%
	10: 10W	8: ø0.8mm				
	55: 5W+5W 77: 7W+7W	Blank				

For further information on packaging, please refer to Appendix C.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/21/17



applications and ratings

Part Designation	Power Rating	T.C.R. (ppm/°C) Max.	Resistance Range		Rated Ambient Temperature	Operating Temperature Range
			J: ±5% (E12)	K: ±10% (E12)		
BPR26	2W	±350*	0.01Ω 0.1Ω - 0.68Ω	0.01Ω - 0.68Ω	+70°C	-40°C to +200°C
BPR28	2W					
BPR38	3W					
BPR58	5W		0.01Ω, 0.1Ω - 1.0Ω	0.01Ω - 1.0Ω		
BPR108	10W		—	0.05Ω, 0.1Ω - 1.0Ω		
BPR55	5W+5W		0.05Ω, 0.1Ω 0.22Ω - 0.47Ω	0.03Ω - 0.47Ω		
BPR77	7W+7W					

\* Application range: The straight style of 0.018Ω or over

standard resistance

Resistance	26, 28		38		58		108		55		77	
	J: ±5%	K: ±10%	J: ±5%	K: ±10%	J: ±5%	K: ±10%	J: ±5%	K: ±10%	J: ±5%	K: ±10%	J: ±5%	K: ±10%
0.01	○	○	○	○	○	○	—	—	—	—	—	—
0.012		○		○		○	—	—	—	—	—	—
0.015		○		○		○	—	—	—	—	—	—
0.02*		○		○		○	—	—	—	—	—	—
0.022		○		○		○	—	—				
0.027		○		○		○	—	—				
0.03*		○		○		○	—	—		○		
0.033		○		○		○	—	—				
0.039		○		○		○	—	—				
0.04*		○		○		○						
0.047		○		○		○						
0.05*		○		○		○		○		○		○
0.068		○		○		○		○		○		○
0.082		○		○		○						
0.1	○	○	○	○	○	○		○	○	○		○
0.12	○	○	○	○	○	○			○	○		
0.15	○	○	○	○	○	○		○		○		
0.18	○	○	○	○	○	○		○		○		
0.22	○	○	○	○	○	○		○	○	○	○	○
0.27	○	○	○	○	○	○		○	○	○		
0.33	○	○	○	○	○	○			○	○	○	○
0.39	○	○	○	○	○	○			○	○		
0.47	○	○	○	○	○	○			○	○		
0.56	○	○	○	○	○	○						
0.68	○	○	○	○	○	○			—	—	—	—
0.82									—	—	—	—
1.00									—	—	—	—

○ : Available

Blank : Please consult

— : Not available

\* Non standard E-12 Decade Value

environmental applications

Performance Characteristics


Parameter	Requirement Δ R%		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C (Measurement position: 10mm under from the case)
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C (Application range: the straight style of 0.018Ω over)
Overload (Short time)	±2.0%	±1.0%	Rated power x 2.5 for 5 seconds (Application range: 0.05Ω & over)
Resistance to Solder Heat	±2.0%	±1.0%	260°C ± 5°C, 10 seconds ± 1 second
Moisture Resistance	±5.0%	±3.0%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±5.0%	±3.0%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±3.0%	±2.0%	+125°C, 100 hours
Resistance to Solvent	No evidence of damage to protective coating and marking	—	After immersing the sample in I.P.A for 60 seconds ± 10 seconds, the resistor surface should be rubbed with absorbent cotton 10 times

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


12/18/12

### features

- The super low resistance ( $3\text{m}\Omega \sim$ ) is suitable for high power current detection
- Pitches and heights adjustable according to mounting conditions
- All custom-made products
- Easy soldering
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

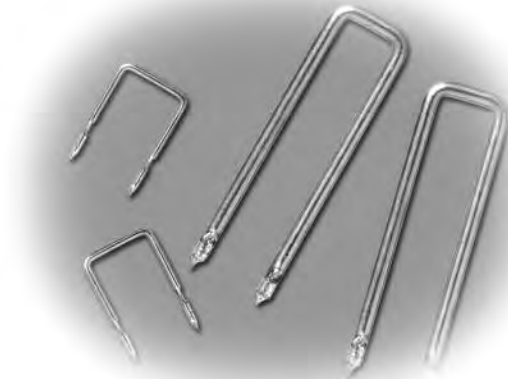

### dimensions and construction

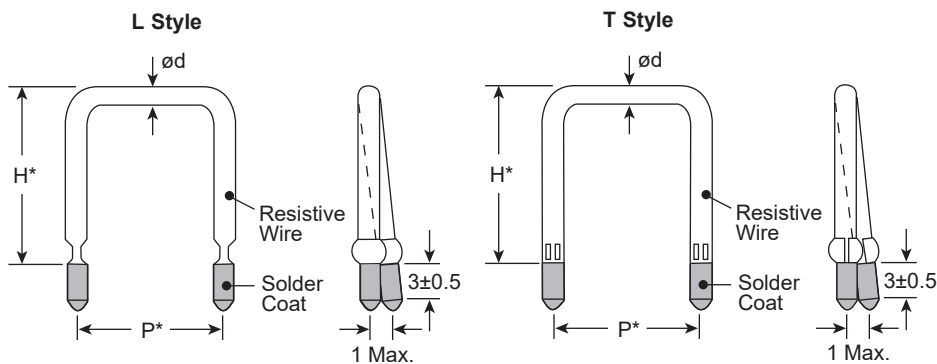

\* Please consult with factory about dimensions "P" and "H"  
T style is applied for the diameter of  $\phi 2.3$  or above

### ordering information

<b>LR</b>	<b>09</b>	<b>D</b>	<b>L</b>	<b>10</b>	<b>20L</b>	<b>J</b>
Type	Symbol	Termination Material	Style	Insertion Pitch	Nominal Resistance	Resistance Tolerance
	06~20: L-Style 23~29: T-Style	D: SnAgCu N: No surface treatment	L (06~20) T (23~29)	Insertion Pitch	3 digits	H: $\pm 3\%$ J: $\pm 5\%$


## applications and ratings

Part Designation	Symbol	ød Diameter (mm)	Maximum Current Rating (A)	Resistance Range	Resistance Tolerance	T.C.R. (ppm/°C) Max.	Rated Ambient Temperature	Operating Temperature Range
LR06D	06	0.6	3.0	50mΩ - 100mΩ	H: ±3% J: ±5%	±100	+70°C	-40°C to +180°C
LR07D	07	0.7	4.0	30mΩ - 70mΩ				
LR08D	08	0.8	4.5	20mΩ - 50mΩ				
LR09D	09	0.9	5.0	20mΩ - 40mΩ				
LR10D	10	1.0	5.5	15mΩ - 30mΩ				
LR11D	11	1.1	6.0	15mΩ - 20mΩ				
LR12D	12	1.2	7.0	10mΩ - 20mΩ				
LR13D	13	1.3	7.5	10mΩ - 20mΩ				
LR14D	14	1.4	8.0	10mΩ - 20mΩ				
LR15D	15	1.5	9.0	10mΩ - 20mΩ				
LR16D	16	1.6	9.5	10mΩ - 15mΩ				
LR18D	18	1.8	11	5mΩ - 10mΩ				
LR20D	20	2.0	12	5mΩ - 10mΩ				
LR23D	23	2.3	14	3mΩ - 10mΩ				
LR26D	26	2.6	18	3mΩ - 5mΩ				
LR29D	29	2.9	21	3mΩ - 5mΩ				

\* Other diameters and resistances are also available on request

## environmental applications


### Derating Curve

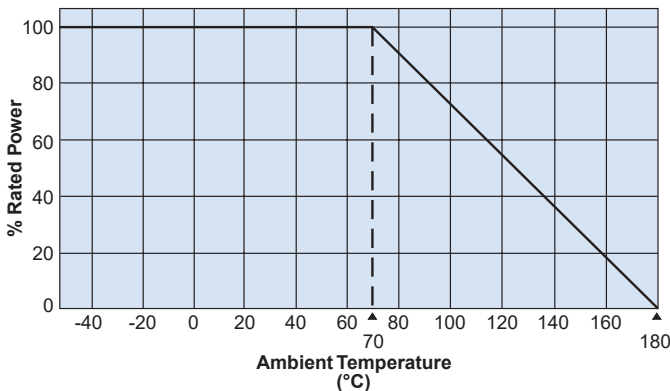

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

## Performance Characteristics


Parameter	Requirement $\Delta R \pm\%$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Resistance to Soldering Heat	±2.0%	±1.6%	350°C ± 10°C, 3 seconds
Moisture Resistance	±3.0%	±2.7%	Power rating x 1/10, 40°C, 90% - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±5.0%	±3.0%	Rated voltage, 70°C, 1000 hours 1.5 hr ON, 0.5 hr OFF cycle

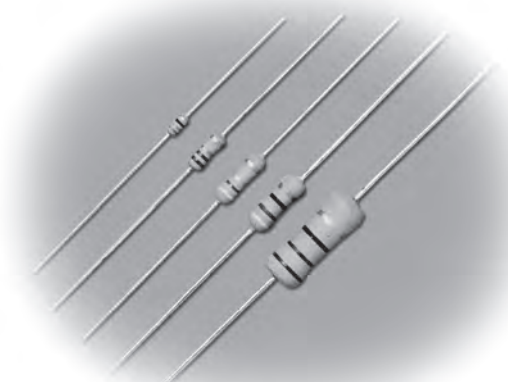

**features**

- Functions as a resistor in normal condition
- Quick fusing protects circuit from excessive overload at an abnormal time
- Flame-retardant coating equivalent to UL94 V-0
- Products meet EU RoHS requirements

**dimensions and construction**

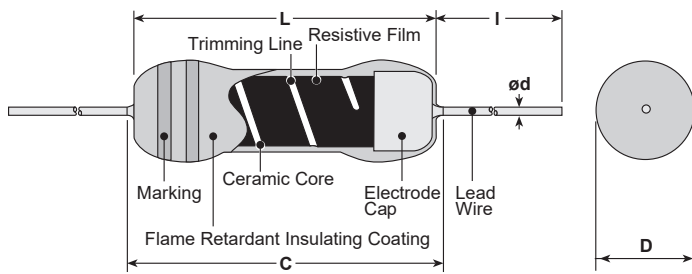

Type	Dimensions inches (mm)				
	L	C Max.	D	d(Nominal)	I*
RF16	.125±.008 (3.2±0.2)	.134 (3.4)	.461 <sup>+0.010</sup> <sub>-0</sub> (1.7 <sup>+0.25</sup> <sub>-0</sub> )	.018 (0.45)	1.18±.118 (30±3)
RF25	.248±.020 (6.3±0.5)	.280 (7.1)	.091±.012 (2.3±0.3)	.024 (0.6)	
RF50	.335±.020 (8.5±0.5)	.374 (9.5)	.118±.012 (3.0±0.3)		
RF1	.354±.039 (9.0±1.0)	.437 (11.1)	.138±.020 (3.5±0.5)	.031 (0.8)	
RF2	.610±.039 (15.5±1.0)	.709 (18.0)	.236±.039 (6.0±1.0)		

\* Lead length changes depending on taping and forming type.

**ordering information**

<b>RF</b>	<b>25</b>	<b>C</b>	<b>T52</b>	<b>A</b>	<b>100</b>	<b>J</b>
<b>Product Code</b>	<b>Power Rating</b>	<b>Terminal Surface Material</b>	<b>Taping &amp; Forming</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
	16: 0.17W 25: 0.25W 50: 0.5W 1: 1W 2: 2W	C: SnCu	T26, T52, T521, T631, MHT, VTP, VTE, VT, GT L, M Forming	A: Ammo R: Reel	3 digits	J: ±5%

**ratings**

Type	Power Rating	Resistance Range E24 J: ±5%	Fusing Characteristics						T.C.R. ×10 <sup>-6</sup> /K	Dielectric Withstanding Voltage	
			Fusing Power								Fusing Time
RF16C	0.17W	1.0 - 1k	—	—	—	3W 1Ω - 4.7Ω	2.5W 5.1Ω - 1kΩ	—	60 sec Max.	±1000: R≤4.7Ω	250V
RF25C	0.25W	0.1 - 10k	10W 0.1 - 0.18Ω	7.5W 0.2 - 0.43Ω	6.25W 0.47 - 0.91Ω	—	3.75W 1Ω - 4.7Ω 2.4kΩ - 10kΩ	3W 5.1Ω - 2.2kΩ	30 sec Max.		±350: R≥5.1Ω
RF50C	0.5W	0.1 - 15k	—	—	12.5W 0.1 - 0.43Ω	—	7.5W 0.47Ω - 2Ω 1.1kΩ - 15kΩ	6W 2.2Ω - 1kΩ		350V	
RF1C	1W	0.1 - 10k	—	30W 0.1 - 0.18Ω	25W 0.2 - 0.43Ω	—	15W 0.47Ω - 2Ω 1.1kΩ - 10kΩ	12W 2.2Ω - 1kΩ		600V	
RF2C	2W	1.0 - 3k	—	—	—	36W 1Ω - 3.6Ω	30W 1.1kΩ - 3kΩ	24W 3.9Ω - 1kΩ			

Rated Ambient Temperature: +70°C


Operating Temperature Range: -40 - +155°C

Rated voltage = √Power Rating×Resistance value

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. 11/21/17

## environmental applications

### Derating Curve

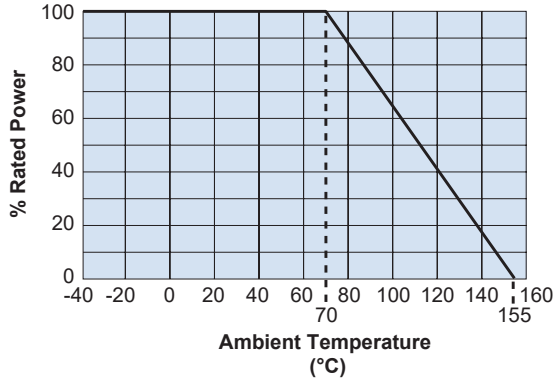



For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with derating curve on the left.

### Performance Characteristics

Test Items	Performance Requirements $\Delta R \pm (\% +0.05\Omega)$		Test Methods
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Overload (Short Time)	1%	0.5%	Rated voltage × 2.5 for 5 seconds
Resistance to Soldering Heat	1%	0.5%	350°C ± 10°C, 3.5s ± 0.5s or 260°C ± 5°C, 10s ± 1s
Rapid Change of Temperature	1%	0.5%	-40°C (30 min.)/ +85°C (30 min.) 5 cycles
Moisture Resistance	5%	2.5%	40°C ± 2°C, 90% - 95% RH, 1000 hours 1.5h ON/0.5h OFF cycle
Endurance at 70°C	5%	2.5%	70°C ± 2°C, 1000 hours 1.5h ON/0.5h OFF cycle
Resistance to Solvent	No abnormality in appearance. Marking shall be easily legible.	—	The resistor shall be immersed in IPA for 30 sec.
Flame retardant	No evidence of flaming or self-flaming.	—	Flame test : The test flame shall be applied and removed for each 15 sec respectively to repeat the cycle 5 times. Overload flame retardant: Power corresponding to 2, 4, 8, 16 and 32 times the power rating shall be applied for each 1min. until disconnection occurs.

### Fusing Characteristics

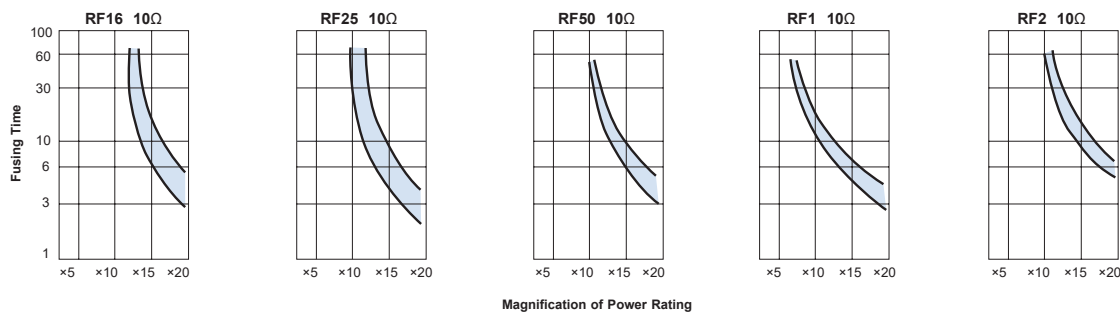


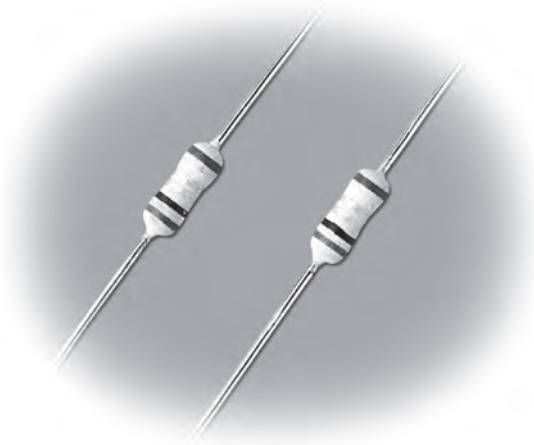

### features

- Fuse within 60 seconds in case of over-current
- Constant current fusing type
- Fuse at low magnification at 5 times or 10 times of power rating
- Flame-retardant coating equivalent to UL94 V-0
- Products meet EU RoHS requirements

### dimensions and construction

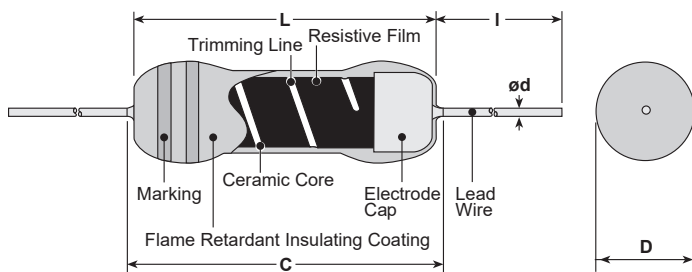

Type	Dimensions inches (mm)				
	L	C Max.	D	d (Nominal)	I*
RF25CC	.248±.020 (6.3±0.5)	.280 (7.1)	.091±.012 (2.3±0.3)	.024 (0.6)	1.18±.118 (30±3)

\* Lead length changes depending on taping and forming type.

### ordering information

<b>RF</b>	<b>25</b>	<b>C</b>	<b>C</b>	<b>T52</b>	<b>A</b>	<b>R68</b>	<b>K</b>
Product Code	Power Rating	Terminal Surface Material	Constant Current Fusing Type	Taping & Forming	Packaging	Nominal Resistance	Resistance Tolerance
	25: 0.25W	C: SnCu		T26, T52, VTP, VTE, L10A, M10X	A: Ammo R: Reel	3 digits	K: ±10%

### applications and ratings

Power Rating	Resistance Range(Ω) (E-24)	Resistance Tolerance	Fusing Characteristics			Dielectric Withstanding Voltage	Taping & Q'ty/AMMO (pcs)	
			Fusing Power		Fusing Time		T26A	T52A
0.25W	0.1 - 0.91	K: ±10%	2.5W 0.1Ω	1.25W 0.11Ω - 0.91Ω	60 sec Max.	250V	2,000	2,000

Rated Ambient Temperature: +70°C


Operating Temperature Range: -40°C - +155°C

Rated voltage =  $\sqrt{\text{Power Rating} \times \text{Resistance value}}$



## environmental applications

### Derating Curve

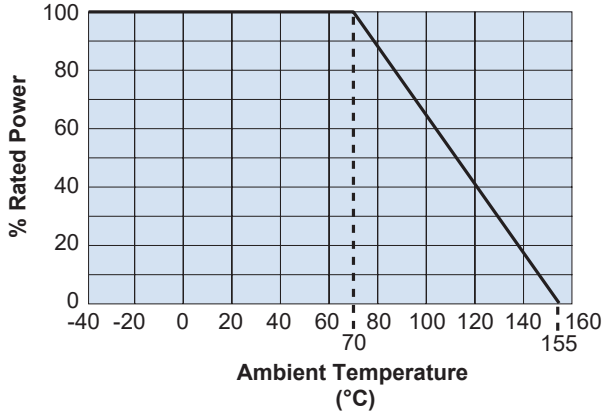


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with derating curve on the left.


### Performance Characteristics


Test Items	Performance Requirements $\Delta R \pm (\% +0.05\Omega)$		Test Methods
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
Resistance to Soldering Heat	5%	2.5%	350°C ± 10°C, 3.5s ± 0.5s or 260°C ± 5°C, 10s ± 1s
Humidity	5%	2.5%	40°C ± 2°C, 90% - 95%RH, 1000h No Load
Endurance at 70°C	5%	2.5%	70°C ± 2°C, 1000h 1.5h ON/0.5h OFF cycle
Resistance to Solvent	No abnormality in appearance. Marking shall be easily legible.	—	The resistor shall be immersed in IPA for 30 sec.
Flame retardant	No evidence of flaming or self-flaming.	—	Flame test: The test flame shall be applied and removed for each 15 sec respectively to repeat the cycle 5 times. Overload flame retardant: Power corresponding to 2, 4, 8, 16 and 32 times the power rating shall be applied for each 1min. until dis-connection occurs.

### Fusing Characteristics

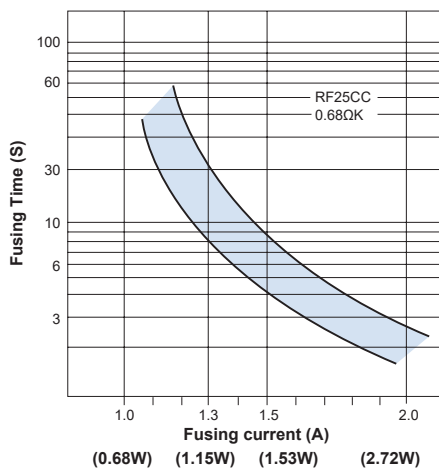

### I-R Characteristics

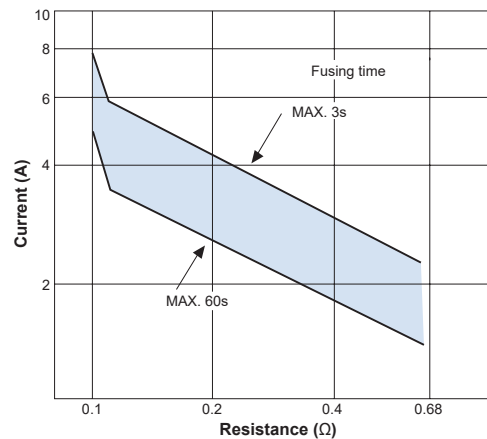

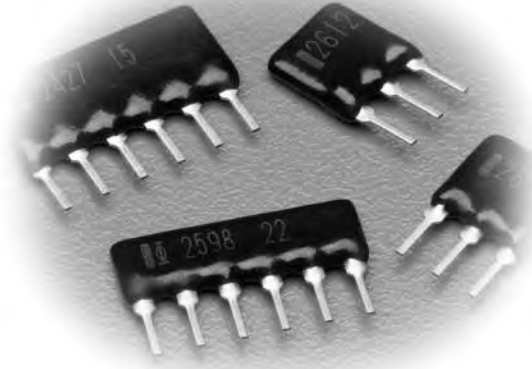


### features

- Custom design network
- Ultra-precision performance for precision analog circuits
- Tolerance to  $\pm 0.1\%$ , matching to  $0.05\%$
- T.C.R. to  $\pm 25\text{ppm}/^\circ\text{C}$ , tracking to  $2\text{ppm}/^\circ\text{C}$
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

leaded resistors

### dimensions and construction

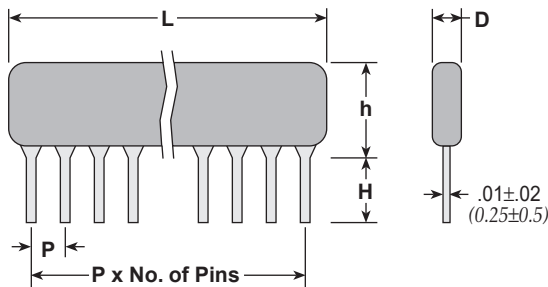

Type	Dimensions inches (mm)				
	L (max.)	D (max.)	P	H	h (max.)
MRPL03	.335 (8.5)	.098 (2.5)	.100 $\pm$ .008 (2.54 $\pm$ 0.2)	.118 $\pm$ .02 (3.0 $\pm$ 0.5)	.256 (6.5)
MRPA03					.335 (8.5)

### ordering information

<b>MRP</b>	<b>L03</b>	<b>E</b>	<b>A</b>	<b>D</b>	<b>103/103</b>	<b>B</b>	<b>A</b>
Type	Size	T.C.R. (ppm/ $^\circ$ C)	T.C.R. Tracking	Termination Material	Resistance Value	Tolerance	Tolerance Ratio
	L03 A03	E: $\pm 25$ C: $\pm 50$	A: 2 Y: 5 T: 10	D: SnAgCu	3 significant figures/ 3 significant figures	B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$ F: $\pm 1.0\%$	E: 0.025% A: 0.05% B: 0.1% C: 0.25% D: 0.5%

### custom circuit ordering information

<b>MRP</b>	<b>KxxxxD</b>
Type	Custom Code
	Factory will assign

### applications and ratings

#### Ratings

Type	Power Rating (mW)		Absolute T.C.R.	T.C.R. Tracking	Resistance Range*	Resistance Tolerance	Maximum Working Voltage	Maximum Overload Voltage	Rated Ambient Temperature	Operating Temperature Range
	Element	Package								
MRPL03	100	200	E: $\pm 25$ C: $\pm 50$	A: 2 (R2/R1 $\leq$ 10) Y: 5 T: 10	50-100k $\Omega$	B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$ F: $\pm 1\%$	100V	200V	+70 $^\circ$ C	-55 $^\circ$ C to +125 $^\circ$ C
MRPA03										

\* Resistance combination for R1, R2 is standardized to 200/20k, 1k/1k, 1k/2k, 1k/4k, 1k/9k, 1k/10k, 1k/20k, 10k/10k, 10k/100k, 50k/50k, 100k/100k

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


11/15/17

## applications and ratings (continued)


### Resistance Range

		Resistance Ratio Tolerance				
		E: 0.025%	A: 0.05%	B: 0.1%	C: 0.25%	D: 0.5%
Absolute Resistance Tolerance	B: $\pm 0.1\%$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$	—	—
	C: $\pm 0.25\%$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$	—
	D: $\pm 0.5\%$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$
	F: $\pm 1\%$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$	50 $\Omega$ - 100k $\Omega$
R1/R2 Relative Resistance Ratio		100 max.	100 max.	150 max.	150 max.	150 max.

### standard circuit schematic




### custom circuit schematics

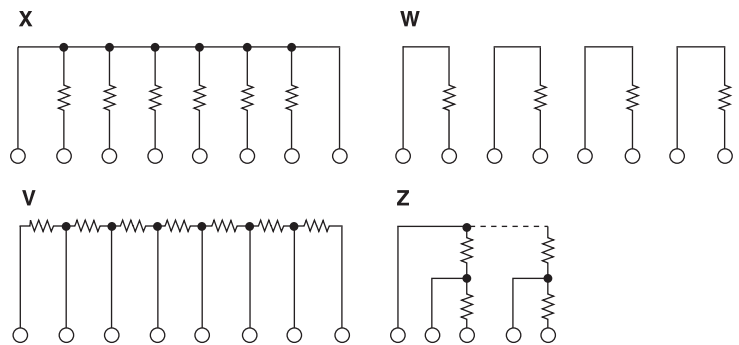

(Examples only. Contact factory for other custom layout requests.)

### environmental applications

#### Derating Curve

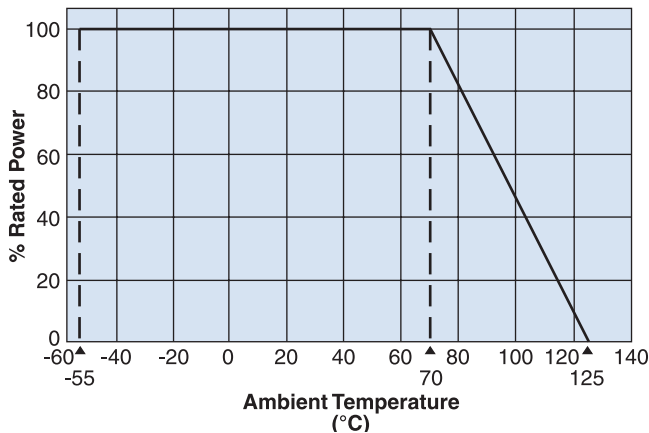

### Performance Characteristics


Parameter	Requirement	Test Method
Resistance	Within specified tolerance	25°C
T.C.R.	Within specified T.C.R.	+25°C/+65°C
Overload (Short Time)	$\pm 0.05\%$	Rated voltage x 2.5 or max. overload voltage, whichever is lower, 5 seconds
Resistance to Soldering Heat	$\pm 0.1\%$	+350°C $\pm$ 10°C, 3.5 $\pm$ 0.5 seconds
Rapid Change of Temperature	$\pm 0.1\%$	-55 $\pm$ 0/-5°C (30 min.), +125 $\pm$ 3/-0°C (30 min.) 5 cycles
Moisture Resistance	$\pm 0.1\%$	40°C $\pm$ 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	$\pm 0.1\%$	70°C $\pm$ 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Resistance to Solvents	No abnormality in outer coating and markings	Soaking in 2-propanol of +20°C ~ +25°C for 180 seconds $\pm$ 10 seconds
Insulation Resistance	10,000M $\Omega$ or above	500V (d.c.) for 1 minute between terminals and coatings
Withstanding Voltage	$\pm 0.5\%$	500V (a.c.) for 1 minute between terminals and coatings

## features

- Various types of standard circuits in different sizes and power are available. (Seated height 0.20" (5.08mm), 0.26" (6.5mm), 0.42" (10.7mm) Max.)
- Higher temperature soldering of the leads prevents terminals from loosening during board assembly
- For automatic insertion machines, stick magazines (the tip of lead terminal is cut to a V shape) and taping packages (TBA: All leads taping, TPA, TUA: 3 leads taping) are applicable.
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

## dimensions and construction

(See table below)

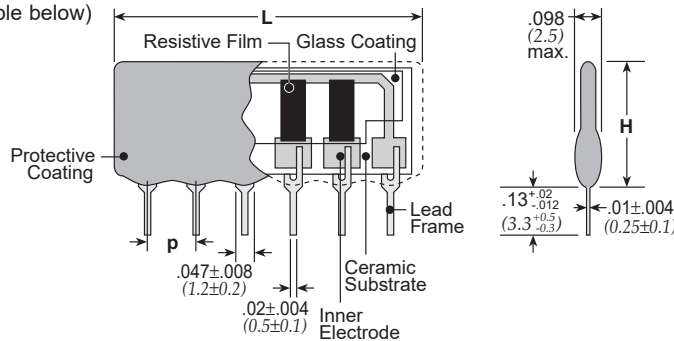

Size Code		Number of Pins														Dimen. in. (mm)	
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	H max.	p
RKL	L	8.20	10.16	12.70	15.24	17.78	20.32	22.86	25.40	27.94	30.48	—	—	—	—	.200 (5.08)	.100±.008 (2.54±0.2)
	B,A,R circuit	250	375	500	625	750	875	1000	1050	1150	1250	—	—	—	—		
	C,T,E circuit	—	—	500	—	750	—	1000	—	1150	—	—	—	—	—		
	D circuit	—	—	375	500	625	750	875	1000	1125	1250	—	—	—	—		
	S Circuit	—	400	—	600	—	800	—	1000	—	1200	—	—	—	—		
RKC (2.54 pitch)	L	8.20	10.8	13.2	15.8	18.3	20.9	23.4	25.9	28.5	31.0	33.6	36.1	38.7	41.3	.256 (6.5)	.100±.008 (2.54±0.2)
	B,A,R circuit	250	375	500	625	750	875	1000	1050	1150	1250	1350	1450	1500	1550		
	C,T,E circuit	—	—	500	—	750	—	1000	—	1150	—	1350	—	—	—		
	D circuit	—	—	375	500	625	750	875	1000	1125	1250	1350	1450	—	—		
	S Circuit	—	500	—	750	—	1000	—	1050	—	1250	—	1450	—	—		
RKH	L	—	10.8	13.3	15.8	18.3	20.9	23.4	25.9	28.5	31.0	33.6	—	—	—	.421 (10.7)	.100±.008 (2.54±0.2)
	B,A,R circuit	—	525	700	875	1050	1250	1400	1500	1600	1700	1800	—	—	—		
	C,T,E circuit	—	—	700	—	1050	—	1400	—	1600	—	1800	—	—	—		
	D circuit	—	—	700	875	1050	1250	1400	1500	1600	1700	—	—	—	—		
	S Circuit	—	500	—	1050	—	1400	—	1500	—	1700	—	—	—	—		
RKC (1.8 pitch)	L	—	10.2	10.8	12.7	15.5	15.8	17.8	20.4	20.9	23.5	25.4	28.5	—	—	.256 (6.5)	.071±.006 (1.8±0.15)
	W	—	300	400	500	580	650	720	760	820	850	880	900	—	—		

L= L dimension (mm) max. W= Wattage/Package (mW) max.

## ordering information

RKC	8	B	S <sup>1</sup>	D	STP	103	F
Type	Number of Resistors	Circuit Symbol	1.8mm Symbol	Termination Material	Packaging	Nominal Resistance	Tolerance
RKC RKH RKL	3 - 16	B, S, C, D, A, T, E, R RKC: L, K	RKC only	D: SnAgCu (Other termination styles available, contact factory for options)	STP, STB TPA: (4-9 pins) or TUA (10 pins) taping (3 leads) TBA: (4-10 pins) taping (all leads)	2 significant figures + 1 multiplier for ±2% & ±5% 3 significant figures + 1 multiplier for ±1% R1/R2 3 digits/3 digits	F: ±1% G: ±2% J: ±5% R circuit: ±2%, ±5% only

For further information on packaging, please refer to Appendix C.


<sup>1</sup> The symbol "S" showing 1.8 pitch is added to the type designation after the circuit symbol.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/05/17


## circuit schematics

**B circuit**

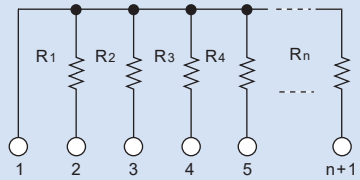


$R1=R2=R3=R4=...=Rn$   
n: number of elements  
Example: RKC8B 103 J  
RKL8B 472 J  
RKH8B 332 J

**S circuit**

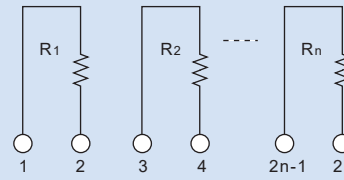


$R1=R2=...=Rn$   
n: number of elements  
Example: RKC4S 103 J  
RKL4S 472 J  
RKH4S 332 J

**C circuit**

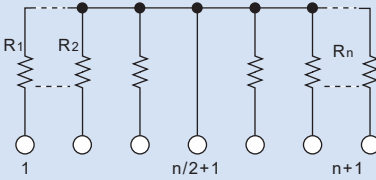


$R1=R2=R3=R4=...=Rn$   
n: number of elements  
Example: RKC8C 103 J  
RKL8C 472 J  
RKH8C 332 J

**D circuit**

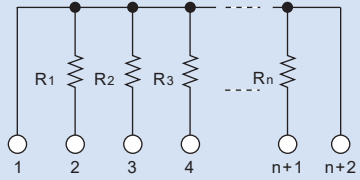


$R1=R2=R3=...=Rn$   
n: number of elements  
Example: RKC8D 103 J  
RKL8D 472 J  
RKH8D 332 J

**A circuit**

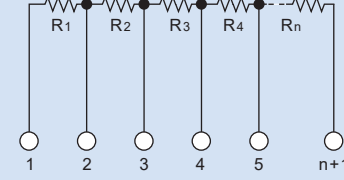


$R1=R2=R3=R4=...=Rn$   
n: number of elements  
Example: RKC8A 103 J  
RKL8A 472 J  
RKH8A 332 J

**T circuit**

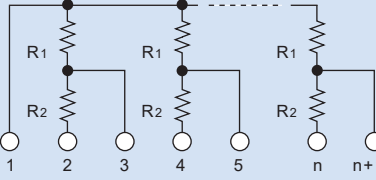


$R1=R2$  or  $R1 \neq R2$   
n: number of elements  
Example: RKC8T 103/103 J  
RKL8T 103/103 J  
RKH8T 103/103 J

**E circuit**

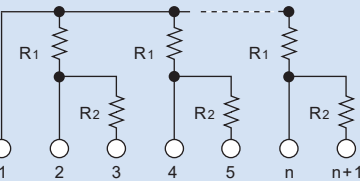


$R1=R2$  or  $R1 \neq R2$   
n: number of elements  
Example: RKC8E 103/103 J  
RKL8E 103/103 J  
RKH8E 103/103 J

**R circuit**

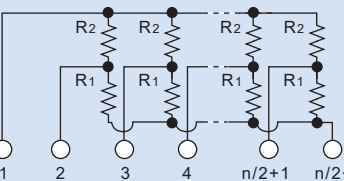


$R1=R2$  or  $R1 \neq R2$   
n: number of elements  
Example: RKC16R 331/471 J  
RKL16R 331/471 J  
RKH16R 331/471 J

**L circuit**

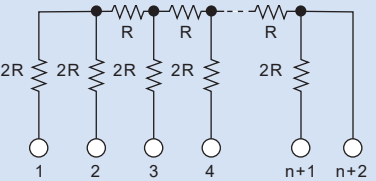


n: number of elements  
Example: RKC5L 253

**K circuit**

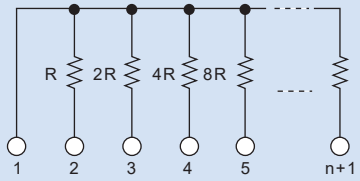


n: number of elements  
Example: RKC4K 102

**Example of custom circuit**

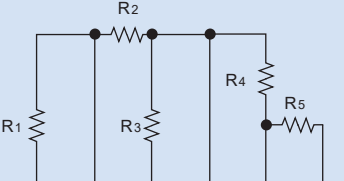

**Example of custom circuit**

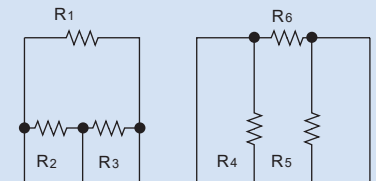

## applications and ratings

Part Designation	Circuit Symbol	Number of Pins	Power Rating/Element	T.C.R. (ppm/°C) Max.	Resistance Range (Ω)	Resistance Tolerance	Maximum Working Voltage	Rated Ambient Temperature	Operating Temperature Range	
RKC	B	3-16	125mW	±200	22-2.2M (E24)	F: ±1% G: ±2% J: ±5%	200V	+70°C	-55°C to +155°C	
	C	5-13								
	D	5-14								
	A	4-14								
	T	5-13								
	E	5-13	250mW							
	S	4-14	125mW		100-100k (E24)	G: ±2% J: ±5%				
	L	6-10	20mW		±200	R=2.5k, 5k 10k, 25k 50k, 100k	±1/2LSB (Bit Error)	20V		+70°C
	K	5-9	40mW			R1(MSB):100 Min Rn(LSB):1M Max	±1/2LSB (Bit Error)			
RKL	B	3-12	125mW	±200	22-1M (E24)	F: ±1% G: ±2% J: ±5%	100V	+70°C	-55°C to +125°C	
	C	5-11								
	D	5-12								
	A	3-12								
	T	5-11								
	E	5-11	200mW							
	S	4-12	125mW		100-100k (E24)	G: ±2% J: ±5%				
	R	4-11	250mW		±200	56-2.2M (E24)	F: ±1% G: ±2% J: ±5%	250V		+70°C
B	4-13									
C	5-13									
D	5-12									
A	4-12									
T	5-13									
E	5-13	500mW								
S	4-12	250mW	100-100k (E24)	G: ±2% J: ±5%						
M-	RKL	3-12	0.1W	±100 ±150 ±200	10-10M	±0.5% ±1% ±2% ±5%	100V	+70°C	-55°C to +125°C	
	RKC (1.8 pitch)	4-14	0.125W				50V			
	RKC (2.54 pitch)	3-16	0.25W				200V			
	RKH	4-13	0.5W 1W				250V			

Rated voltage =  $\sqrt{\text{power rating} \times \text{resistance value or max. working voltage}}$ , whichever is lower.




## weight (g/1000 pcs)

	Number of Pins						
	3	4	5	6	7	8	9
<b>RKL</b>	147	185	228	271	314	357	400
<b>RKC</b>	160	217	273	330	387	444	501
<b>RKH</b>	—	416	511	606	701	796	891

	Number of Pins						
	10	11	12	13	14	15	16
<b>RKL</b>	443	486	529	—	—	—	—
<b>RKC</b>	558	615	672	728	785	842	893
<b>RKH</b>	986	1081	1176	1271	—	—	—

## environmental applications


### Derating Curve

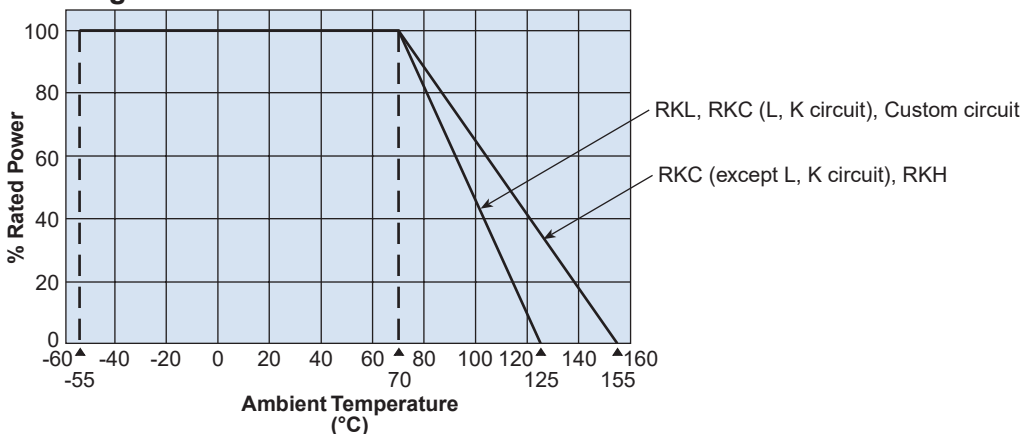

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C, +25°C/+125°C (RKL) +25°C/-55°C, +25°C/+155°C (RKC, RKH)
Overload (Short time)	$\pm 0.5\%$	$\pm 0.25\%$	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	$\pm 0.5\%$	$\pm 0.25\%$	260°C $\pm$ 5°C, 10 seconds $\pm$ 1 second
Temperature Cycling	$\pm 0.5\%$	$\pm 0.25\%$	-40°C (30 minutes), +85°C (30 minutes), 5 cycles
Moisture Resistance	$\pm 2.0\%$	$\pm 1.0\%$	40°C $\pm$ 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	$\pm 2.0\%$	$\pm 1.0\%$	70°C $\pm$ 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle

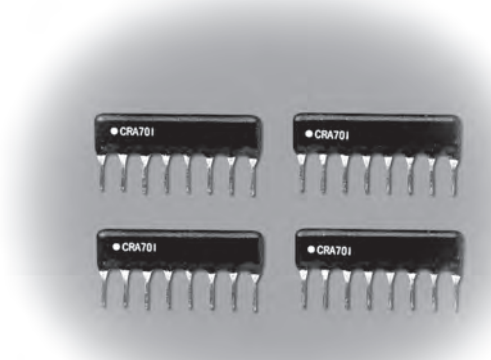


**features**

- Metal glaze resistors (RuO<sub>2</sub>) provide lifetime stability
- Free from short circuit, unexpected solder melting and terminal disconnection due to the high temperature solder used to connect terminals
- Capable of reducing the numbers of parts and part insertions
- Custom orders are available
- Products with lead-free termination meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass

leaded resistors

**dimensions and construction**

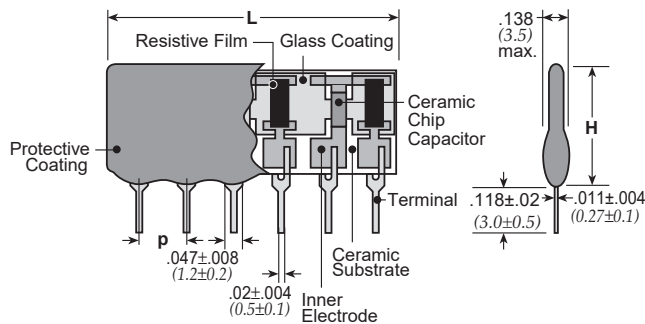

Type	Dimensions inches (mm)			
	Number of Pins	L	H	p
CRA □	5 – 90	.100xP+.024 (2.54xP+0.6)	.256 (6.5)	.100 (2.54)
CRB □	5 – 10			
CRC □	5 – 13			
CRD □	5 – 13			
CRE □	6 – 14			
CRF □	5 – 13			

□ = Number of pins

**ordering information**

CR	E	6	01	D
Product Code	Circuit Symbol	Number of Cells	KOA Reference Number	Terminal Surface Material
	A B C D E F M	4 – 8 (CRA) 3 – 8 (CRB) 2 – 6 (CRC, CRD CRE, CRF) Nil (CRM)		D: SnAgCu Nil: Sn/Pb

**ratings**

Parameter	Resistor	Capacitor
Max. Operating Voltage	50V	
Constant Range	10Ω – 1MΩ	10pF – 0.1μF
T.C.	±200×10 <sup>-9</sup> /K	CH, B, R*
Tolerance	±5% (J)	±5% (J) ±10% (K) ±20% (M) -20% – +80% (Z)
Operating Temp. Range	-25°C – +85°C	
Storage Temp. Range	-55°C – +125°C	

T.C. Type	T.C.			
	Reference Temp.	Temp. Range	Capacitance Change or Temp. Coefficient	Operating Temp.
CH	20°C	20~125°C	0±60ppm/°C	-55~125°C
B	20°C	-25~85°C	±10%	-25~85°C
R	20°C	-55~125°C	±15%	-55~125°C

\* Refer to T.C. chart to the right







Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. 11/15/17

## maximum wattage/package

mW/Package	Number of Pins				
	5	6	7	8	9
	500	625	750	875	1000

mW/Package	Number of Pins				
	10	11	12	13	14
	1050	1150	1250	1350	1450

## circuit schematics

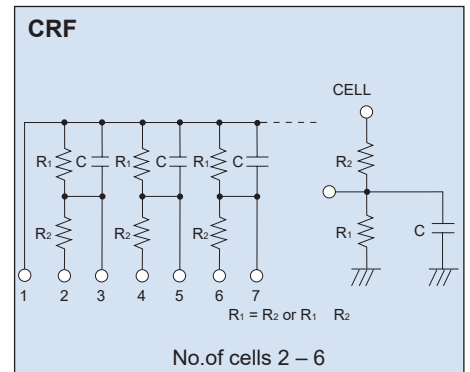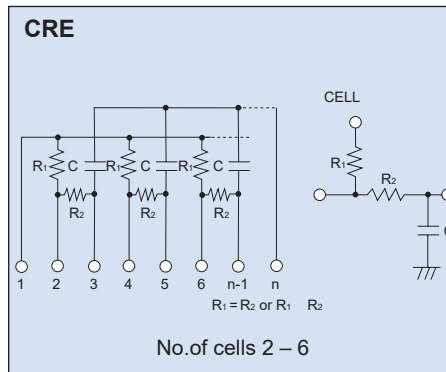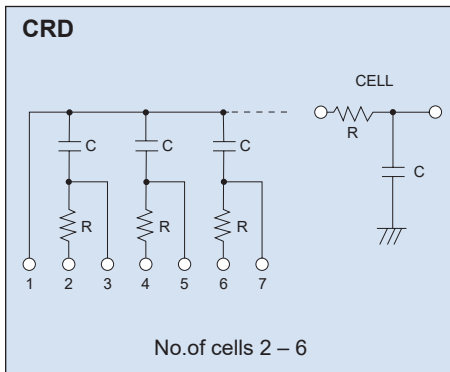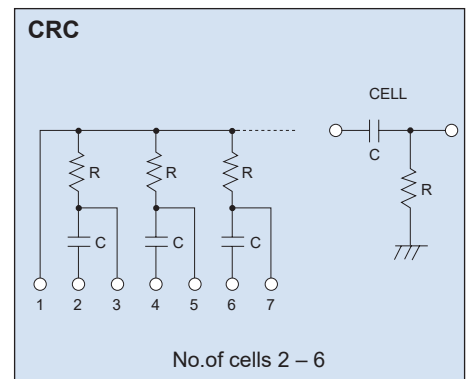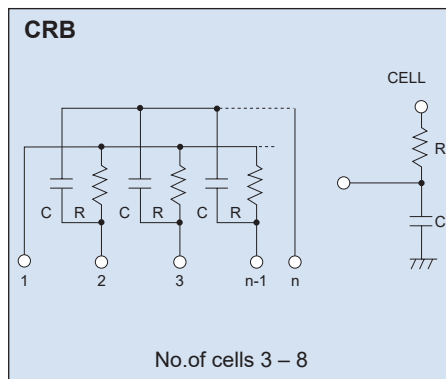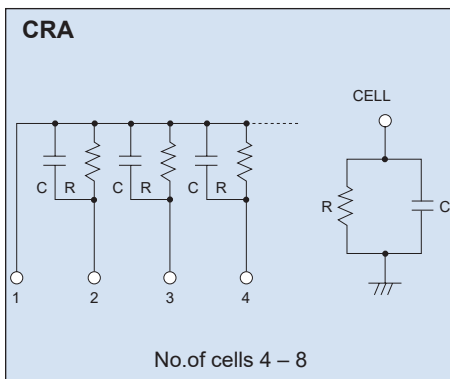

When ordering the CR series, please indicate the following items shown below:

For circuit code A – F, please indicate the following items:

- Resistance
- Capacitance
- Operating voltage
- Capacitance tolerance
- T.C.

For circuit code M, please add the following items:

- Circuit schematics
- Pin layout
- Dimensions
- Conditions for use
- Resistor (Power rating, Tolerance, T.C.R.)

## Precautions for the Thermal Sensors

Refer to the precautions of common matters for all products in the beginning of this catalog.

### Particulars Common to Thermal Sensors

- Excessive voltage such as ESD, could damage thermal sensors.
- Water drops from condensation or impure substances that adheres between the electrode wires may cause insulation deficiency and lower the resistance value of the thermal sensors. Be aware when using this product.
- Avoid applying thermal shocks with large temperature difference in order to maintain the accuracy of the thermistor.
- Some of the thermal sensors use special temperature sensing films. Contact us if the sensors are constantly operated under high temperature environment.


### Platinum Thin-Film Thermal Sensors

- Welding is recommended to connect the lead wires of SDT101B, SDT310P, SDT310MTM, SDT310AP, SDT310HCTP and SDT310VASP since they are heat resistant lead wires. Select the flux for stainless-steel when soldering. Wash the flux with hot water after the soldering to remove the residue completely.
- The 3-wire or 4-wire method is recommended for implementing high precision temperature measuring for both SDT101 and SDT310 series.
- When molded or placed in a metal tube filled with resin, the resistance value may change depending on the kind of resins used.

## Terms and Definitions

### Thermistor

- Thermally sensitive resistors, constructed from temperature sensitive semi-conductive materials, with predictable, large variation in resistance due to change in temperature. There are two kinds of thermistors characterized by resistance change.
- PTC (Positive Temperature Coefficient): Resistance increases with a rise in temperature.
- NTC (Negative Temperature Coefficient): Resistance decreases with a rise in temperature.



### Rated Power

- The maximum wattage which can be continuously applied to a resistor at the rated ambient temperature.

### Critical Resistance Value

- The maximum nominal resistance value at which the rated power can be applied without exceeding the maximum working voltage.
- The rated voltage is equal to the maximum working voltage at the critical resistance value.

### Maximum Working Voltage

- Maximum D.C. or A.C. voltage that can be continuously applied to a resistor or a thermosensor. However, the maximum value of the applicable voltage is the rated voltage at the critical resistance value or lower.

### Overload Voltage

- Allowable voltage which is applied for 5 sec. according to the short time overload test. Overload voltage shall be 2.5 times of rated voltage or max. overload voltage, whichever is lower.

### Curie Temperature (PTC)

- The temperature at which the resistance value starts to increase rapidly. It is also called the switching temperature.

### Resistance-Temperature Characteristic of a Thermistor (NTC)

- The relationship between a zero load resistance and a temperature or a temperature range. It can be expressed using the following formula:

$$R = R_0 \exp \{B(1/T - 1/T_0)\}$$

R : Resistance Value at Temperature T (K)

R<sub>0</sub> : Resistance Value at Temperature T<sub>0</sub> (K)

B : B Constants T (K)=t (°C)+273.15

### B Constant of a Thermistor (NTC)

- Size of change in the resistance between any two temperatures within a specified range is calculated using the following formula:

$$B(K) = \frac{\ln R - \ln R_1}{1/T - 1/T_1}$$

R : Resistance Value in T (K)

R<sub>1</sub> : Resistance Value in T<sub>1</sub> (K)

T : Standard Temperature (K)

T<sub>1</sub> : Regulated Temperature (K)

### Thermal Dissipation Constant

- The necessary power which is needed to increase the temperature of the element 1°C by self heating and is expressed with the following formula:

W : Electrical input power (W)

$\delta(W/°C) = W/(T_1 - T)$  T : Standard Temperature (°C)

T<sub>1</sub> : Self heating temperature generated by applied power (°C)

### Temperature Coefficient of Resistance (T.C.R.)

- Relative variation of resistance between two given temperatures when temperature is changed by 1K, which is calculated by the following formula.

$$T.C.R. (ppm/°C) = \frac{R - R_0}{R_0} \times \frac{1}{T - T_0} \times 10^6$$

R : Resistance value (Ω) at T

R<sub>0</sub> : Resistance value (Ω) at T<sub>0</sub>

T : Measured test temperature (°C)

T<sub>0</sub> : Measured base temperature (°C)

### Rated Temperature

- Maximum ambient temperature at which the power rating may be applied continuously. The rated ambient temperature refers to the temperature around the resistor mounted inside the equipment, not to the air temperature outside the equipment.

### Derating Curve

- Plot that expresses the relation between ambient temperature and the maximum allowable power, which is generally expressed in percentage.

### Thermal Time Constant

- Time needed for a sensor's temperature to change 63.2% when the ambient temperature of a sensor is rapidly changed by a condition in which self heat generation can be ignored.

### External Conductor

- A conductor connected to a temperature sensor that is located outside of the protective body.

### Internal Conductor


- A conductor connected to a temperature sensor that is located inside of the protective body.



## features

- SMD platinum thin film thermal sensors
- T.C.R. is in accordance to JIS-DIN standards IEC
- Suitable for temperature control in various industrial equipment
- Suitable for both flow and reflow solderings
- Products with lead-free terminations meet EU RoHS requirements

## dimensions and construction

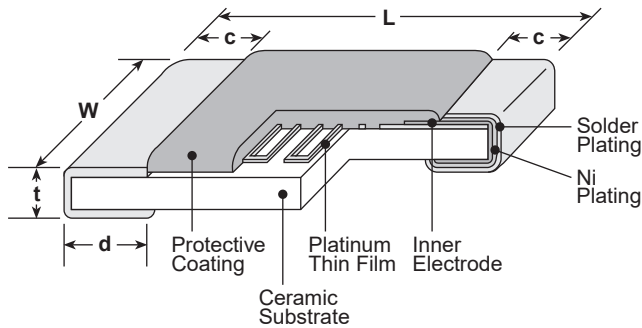

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>2B (1206)</b>	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.02±.012 (0.5±0.3)	.02±.006 (0.5±0.15)

thermal sensors

## ordering information

SDT73H	2B	T	TE	100	F	385
Type	Size Code	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance	T.C.R. (x 10 <sup>-6</sup> /K)
SDT73H 2B SDT73S 2B	2B: 3.2x1.6mm	T: Sn	TEK: 4mm pitch plastic embossed (1,000 pieces/reel) TE: 4mm pitch plastic embossed (5,000 pieces/reel)	100: 100Ω 500: 500Ω SDT73S: 100Ω	C: ±0.2% F: ±1% SDT73S: F: ±1%	385: +3850

## applications and ratings

Part Designation	Resistance @ 0°C	Resistor Tolerance*	Thermal Time Constant**	Thermal Dissipation Constant**	T.C.R. (ppm/°C)	T.C.R. Tolerance (ppm/°C)	Specified Current	Operating Temperature Range
SDT73H 2B	100Ω 500Ω	C: ±0.2% F: ±1%	6.5 seconds	2.4mW/°C	3850	±50	1mA Max.: 100Ω	-55°C to +155°C
SDT73S 2B	100Ω	F: ±1%					0.1mA Max.: 500Ω	

\* Please consult with us about the products equivalent to class B of JIS.

\*\* Thermal time constant and thermal dissipation constant are reference values, which are values of elements and vary with connecting or fixing methods. Thermal dissipation constant is approx. 4mW/°C under the surface mounting condition.

\*\*\* When always using a SDT73S, 200°C or less is recommended.


For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

3/09/15

## environmental applications

### Temperature Characteristics

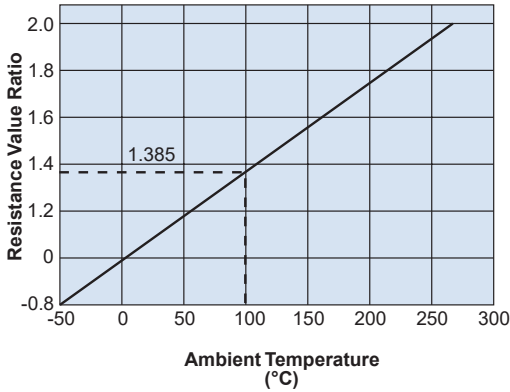

Approximate Expression for Resistance-Temperature Characteristics  
 -55°C~0°C :  $R_T = R_0 \{1 + C_1 T + C_2 T^2 + C_3 (T-100) T^3\}$   
 0°C~+250°C :  $R_T = R_0 (1 + C_1 T + C_2 T^2)$

$R_T$  : Resistance value at T°C

$R_0$  : Resistance value at 0°C

T : Ambient temperature(°C)

Constants  $C_1, C_2, C_3$ :

$$C_1 = 3.9083 \times 10^{-3} \text{ } ^\circ\text{C}^{-1}$$

$$C_2 = -5.775 \times 10^{-7} \text{ } ^\circ\text{C}^{-2}$$

$$C_3 = -4.183 \times 10^{-12} \text{ } ^\circ\text{C}^{-4}$$

### Pt100 Resistance - Temperature Characteristics (JIS C 1604-1997)

Temperature (°C)	0	-1	-2	-3	-4	-5	-6	-7	-8	-9
-50	80.31	79.91	79.51	79.11	78.72	78.32	—	—	—	—
-40	84.27	83.87	83.48	83.08	82.69	82.29	81.89	81.50	81.10	80.70
-30	88.22	87.83	87.43	87.04	86.64	86.25	85.85	85.46	85.06	84.67
-20	92.16	91.77	91.37	90.98	90.59	90.19	89.80	89.40	89.01	88.62
-10	96.09	95.69	95.30	94.91	94.52	94.12	93.73	93.34	92.95	92.55
0	100.00	99.61	99.22	98.83	98.44	98.04	97.65	97.26	96.87	96.48
	0	1	2	3	4	5	6	7	8	9
0	100.00	100.39	100.78	101.17	101.56	101.95	102.34	102.73	103.12	103.51
10	103.90	104.29	104.68	105.07	105.46	105.85	106.24	106.63	107.02	107.40
20	107.79	108.18	108.57	108.96	109.35	109.73	110.12	110.51	110.90	111.29
30	111.67	112.06	112.45	112.83	113.22	113.61	114.00	114.38	114.77	115.15
40	115.54	115.93	116.31	116.70	117.08	117.47	117.86	118.24	118.63	119.01
50	119.40	119.78	120.17	120.55	120.94	121.32	121.71	122.09	122.47	122.86
60	123.24	123.63	124.01	124.39	124.78	125.16	125.54	125.93	126.31	126.69
70	127.08	127.46	127.84	128.22	128.61	128.99	129.37	129.75	130.13	130.52
80	130.90	131.28	131.66	132.04	132.42	132.80	133.18	133.57	133.95	134.33
90	134.71	135.09	135.47	135.85	136.23	136.61	136.99	137.37	137.75	138.13
100	138.51	138.88	139.26	139.64	140.02	140.40	140.78	141.16	141.54	141.91
110	142.29	142.67	143.05	143.43	143.80	144.18	144.56	144.94	145.31	145.69
120	146.07	146.44	146.82	147.20	147.57	147.95	148.33	148.70	149.08	149.46
130	149.83	150.21	150.58	150.96	151.33	151.71	152.08	152.46	152.83	153.21
140	153.58	153.96	154.33	154.71	155.08	155.46	155.83	156.20	156.58	156.95
150	157.33	157.70	158.07	158.45	158.82	159.19	159.56	159.94	160.31	160.68
160	161.05	161.43	161.80	162.17	162.54	162.91	163.29	163.66	164.03	164.40
170	164.77	165.14	165.51	165.89	166.26	166.63	167.00	167.37	167.74	168.11
180	168.48	168.85	169.22	169.59	169.96	170.33	170.70	171.07	171.43	171.80
190	172.17	172.54	172.91	173.28	173.65	174.02	174.38	174.75	175.12	175.49
200	175.86	176.22	176.59	176.96	177.33	177.69	178.06	178.43	178.79	179.16
210	179.53	179.89	180.26	180.63	180.99	181.36	181.72	182.09	182.46	182.82
220	183.19	183.55	183.92	184.28	184.65	185.01	185.38	185.74	186.11	186.47
230	186.84	187.20	187.56	187.93	188.29	188.66	189.02	189.38	189.75	190.11
240	190.47	190.84	191.20	191.56	191.92	192.29	192.65	193.01	193.37	193.74
250	194.10	—	—	—	—	—	—	—	—	—

Note: Desired temperature values are obtained by adding temperatures in the vertical and horizontal axes. When calculating a resistance value of 105°C, read the value in the column where 100°C in the vertical axis and 5°C in the horizontal axis cross. The value will be 140.40Ω. The value for 500Ω at 0°C will be the value obtained by multiplying the resistance value in this table by 5.

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	0°C
T.C.R.	Within specified T.C.R.	3850±10ppm/°C	0°C/ +100°C
Insulation Resistance	100MΩ or more	—	d.c. 100V
Dielectric Withstanding Voltage	±0.5%	-0.019%	a.c. 100V, 60 seconds - 70 seconds
Resistance to Solder Heat	±0.5%	-0.004%	260°C for 10 seconds
Rapid Change of Temperature	±0.5%	-0.033% (SDT73H) -0.048% (SDT73S)	-55°C (30 minutes)/ +25°C (2 - 3 minutes)/ +155°C (30 minutes)/ +25°C (2 - 3 minutes), 10 cycles
Moisture Resistance	±0.5%	-0.016%	40°C, 90 - 95% RH, 1000 hours, 1mA, 1.5 hr ON, 0.5 hr OFF cycle
Normal Temperature Load Life	±0.5%	-0.010%	20°C ± 10°C, 1000 hours, 1mA continuous turning on electricity
High Temperature Load Life	±0.5%	-0.017% (SDT73H) -0.020% (SDT73S)	+155°C, 1000 hours (SDT73H), +250°C, 1000 hours (SDT73S) 1mA continuous turning on electricity
High Temperature Exposure	±0.5%	-0.022% (SDT73H) -0.023% (SDT73S)	+155°C, 1000 hours (SDT73H), +250°C, 1000 hours (SDT73S)
Low Temperature Exposure	±0.5%	-0.029%	-55°C, 1000 hours

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

3/09/15






### features

- SMD platinum thin film thermal sensors
- T.C.R. is in accordance to JIS-DIN IEC standards
- The evaluation based on AEC-Q200 has been examined
- Suitable for both flow and reflow solderings
- Products with lead-free terminations meet EU RoHS
- AEC-Q200 Qualified

### dimensions and construction

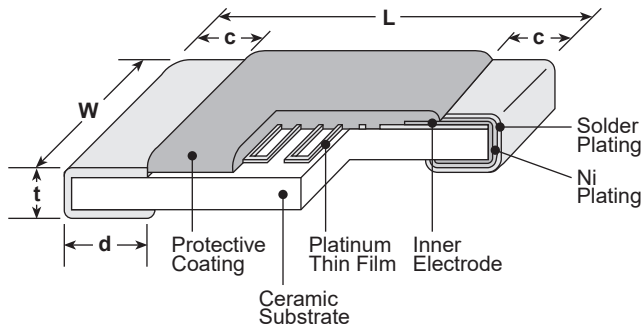

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.02±.012 (0.5±0.3)	.02±.006 (0.5±0.15)

### ordering information

<b>SDT73V</b>	<b>2B</b>	<b>T</b>	<b>TE</b>	<b>100</b>	<b>F</b>	<b>385</b>
Type	Size Code	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance	T.C.R. (x 10 <sup>-6</sup> /K)
	2B: 3.2x1.6mm	T: Sn	TEK: 4mm pitch plastic embossed (1,000 pieces/reel) TE: 4mm pitch plastic embossed (5,000 pieces/reel)	100: 100Ω 500: 500Ω	C: ±0.2% F: ±1%	

### applications and ratings

Part Designation	Resistance @ 0°C	Resistor Tolerance*	Thermal Time Constant**	Thermal Dissipation Constant**	T.C.R. (ppm/°C)	T.C.R. Tolerance (ppm/°C)	Specified Current	Operating Temperature Range
SDT73V 2B	100Ω 500Ω	C: ±0.2% F: ±1%	6.5 seconds	2.4mW/°C	3850	±50	1mA Max.: 100Ω 0.1mA Max.: 500Ω	-55°C to +155°C


\* Please consult with us about the products equivalent to class B of JIS.

\*\* Thermal time constant and thermal dissipation constant are reference values, which are values of elements and vary with connecting or fixing methods. Thermal dissipation constant is approx. 4mW/°C under the surface mounting condition.

For further information on packaging, please refer to Appendix A.

## environmental applications

### Temperature Characteristics

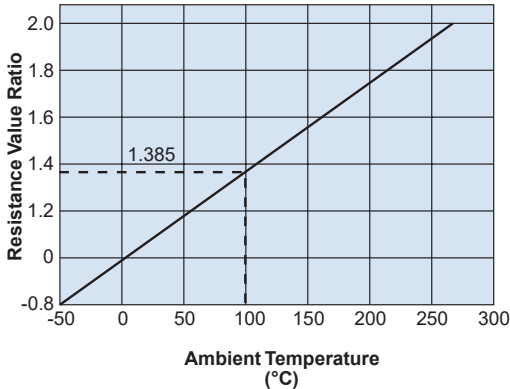

Approximate Expression for Resistance-Temperature Characteristics  
 -55°C~0°C :  $R_T = R_0 \{1 + C_1 T + C_2 T^2 + C_3 (T-100) T^3\}$   
 0°C~+155°C :  $R_T = R_0 (1 + C_1 T + C_2 T^2)$

$R_T$  : Resistance value at T°C  
 $R_0$  : Resistance value at 0°C  
 T : Ambient temperature(°C)  
 Constants  $C_1, C_2, C_3$ :  
 $C_1 = 3.9083 \times 10^{-3} \text{ } ^\circ\text{C}^{-1}$   
 $C_2 = -5.775 \times 10^{-7} \text{ } ^\circ\text{C}^{-2}$   
 $C_3 = -4.183 \times 10^{-12} \text{ } ^\circ\text{C}^{-4}$

### Pt100 Resistance - Temperature Characteristic (JIS C 1604<sup>-1997</sup>)

Temperature (°C)	0	-1	-2	-3	-4	-5	-6	-7	-8	-9
-50	80.31	79.91	79.51	79.11	78.72	78.32	—	—	—	—
-40	84.27	83.87	83.48	83.08	82.69	82.29	81.89	81.50	81.10	80.70
-30	88.22	87.83	87.43	87.04	86.64	86.25	85.85	85.46	85.06	84.67
-20	92.16	91.77	91.37	90.98	90.59	90.19	89.80	89.40	89.01	88.62
-10	96.09	95.69	95.30	94.91	94.52	94.12	93.73	93.34	92.95	92.55
0	100.00	99.61	99.22	98.83	98.44	98.04	97.65	97.26	96.87	96.48
	<b>0</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
0	100.00	100.39	100.78	101.17	101.56	101.95	102.34	102.73	103.12	103.51
10	103.90	104.29	104.68	105.07	105.46	105.85	106.24	106.63	107.02	107.40
20	107.79	108.18	108.57	108.96	109.35	109.73	110.12	110.51	110.90	111.29
30	111.67	112.06	112.45	112.83	113.22	113.61	114.00	114.38	114.77	115.15
40	115.54	115.93	116.31	116.70	117.08	117.47	117.86	118.24	118.63	119.01
50	119.40	119.78	120.17	120.55	120.94	121.32	121.71	122.09	122.47	122.86
60	123.24	123.63	124.01	124.39	124.78	125.16	125.54	125.93	126.31	126.69
70	127.08	127.46	127.84	128.22	128.61	128.99	129.37	129.75	130.13	130.52
80	130.90	131.28	131.66	132.04	132.42	132.80	133.18	133.57	133.95	134.33
90	134.71	135.09	135.47	135.85	136.23	136.61	136.99	137.37	137.75	138.13
100	138.51	138.88	139.26	139.64	140.02	140.40	140.78	141.16	141.54	141.91
110	142.29	142.67	143.05	143.43	143.80	144.18	144.56	144.94	145.31	145.69
120	146.07	146.44	146.82	147.20	147.57	147.95	148.33	148.70	149.08	149.46
130	149.83	150.21	150.58	150.96	151.33	151.71	152.08	152.46	152.83	153.21
140	153.58	153.96	154.33	154.71	155.08	155.46	155.83	156.20	156.58	156.95
150	157.33	157.70	158.07	158.45	158.82	159.19	—	—	—	—

Note: Desired temperature values are obtained by adding temperatures in the vertical and horizontal axes. When calculating a resistance value of 105°C, read the value in the column where 100°C in the vertical axis and 5°C in the horizontal axis cross. The value will be 140.40Ω. The value for 500Ω at 0°C will be the value obtained by multiplying the resistance value in this table by 5.

## Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
	Limit	Typical	
High Temperature Exposure	±0.5%	-0.022%	+155°C, 1000 hours
Rapid Change of Temperature	±0.5%	-0.058%	-55°C (30 minutes)/ +25°C (2 - 3 minutes)/ +155°C (30 minutes)/ +25°C (2 - 3 minutes), 1000 cycles
Moisture Resistance	±0.5%	-0.041%	25°C, -65°C (90 - 100% RH), t= 24 hours/cycle. Unpowered. It is carried out 10 times.
Moisture Resistance	±0.5%	-0.016%	85°C, 85% RH, 1000 hours, 1mA, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Load Life	±0.5%	-0.017%	155°C, 1000 hours, 1mA continuous turning on electricity
Mechanical Shock	±0.5%	-0.001%	100gs Maximum, 6Dms (Standard), 12.3 feet/second
Vibration	±0.5%	-0.009%	Test from 10-2000Hz, 5g's for 20 minutes, 12 cycles each of 3 orientations
Resistance to Solder Heat	±0.5%	-0.004%	260°C for 10 seconds
Thermal Shock	±0.5%	-0.032%	-55°C (15 minutes)/ +155°C (15 minutes), 300 cycles
Solderability	95% Coverage Min.	—	235°C±5°C, 3 seconds ± 0.5 seconds
Terminal Strength	±0.5%	-0.011%	1.8kg force is kept on the samples for 60 seconds


**NEW**



## features

- Small as quarter volume of conventional type. 3.2 second thermal time constant.
- Excellent heat-resistance
- Applies axial lead type suitable to use as heater element
- Products with lead-free terminations meet EU RoHS requirements
- AEC-Q200 Qualified

## dimensions and construction

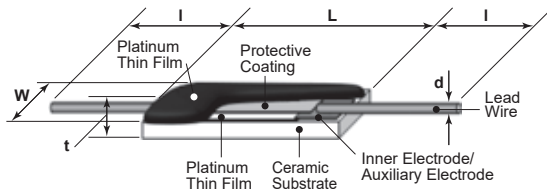

Type	Dimensions inches (mm)				
	W	L	t	d (Nom.)	I
SDT310VASP	.016 <sup>+0.006</sup> <sub>-.004</sub> (0.4 <sup>+0.15</sup> <sub>-0.1</sub> )	.079±.004 (2.0±0.10)	.026 max. (0.65 max.)	.006±.002 (ø0.15±0.05)	.394±.079 (10±2.0)

thermal sensors

## ordering information

SDT310V	AS	P	K	20	F	25
Type	Style	Terminal Surface Material	Packaging	Nominal Resistance	Resistance Tolerance	T.C.R. (x 10 <sup>-6</sup> /K)
		P: Pt clad	K: Chip Tray	20: 20Ω	F: ±1	25: ±25 x 10 <sup>-6</sup> /K

## applications and ratings

Part Designation	Nominal R. Value at 0°C	R. Value Tolerance (%) at 0°C	T.C.R. x 10 <sup>-6</sup> /K*	Thermal Time Constant**	Maximum Current	Power Rating	Operating Temperature Range
SDT310VASP	20Ω	±1%	3850±25	3.2 seconds in stationary air	90mA Max.	0.5W	-55°C to +600°C


\* T.C.R. measuring temperature: 0°C/+100°C.

\*\* Thermal time constant is value measured in stationary air and is typical value, which are values of elements and vary with connecting or fixing methods.

\*\*\* Temperature of the device including a self-heating.

## environmental applications

### Temperature Characteristics

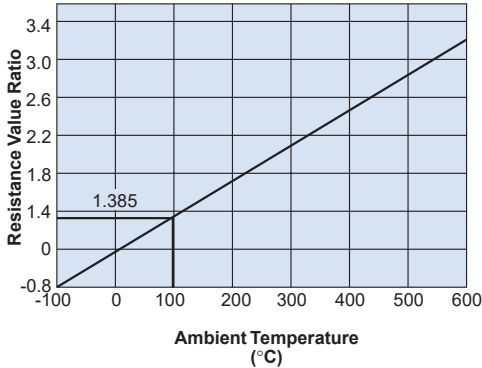

Approximate Expression for Resistance-Temperature Characteristics  
 -55°C~0°C :  $R_T = R_0 \{1 + C_1 T + C_2 T^2 + C_3 (T-100) T^3\}$   
 0°C~+400°C :  $R_T = R_0 (1 + C_1 T + C_2 T^2)$   
 $R_T$  : Resistance value at T°C  
 $R_0$  : Resistance value at 0°C  
 T : Ambient temperature(°C)  
 Constants  $C_1, C_2, C_3$ :  
 $C_1 = 3.9083 \times 10^{-3} \text{ } ^\circ\text{C}^{-1}$   
 $C_2 = -5.775 \times 10^{-7} \text{ } ^\circ\text{C}^{-2}$   
 $C_3 = -4.183 \times 10^{-12} \text{ } ^\circ\text{C}^{-4}$

### Pt100 Resistance - Temperature Characteristic 20 at 0°C

Temperature (°C)	0	-1	-2	-3	-4	-5	-6	-7	-8	-9
-50	16.06	15.98	15.90	15.82	15.74	15.66	-	-	-	-
-40	16.85	16.77	16.70	16.62	16.54	16.46	16.38	16.30	16.22	16.14
-30	17.64	17.57	17.49	17.41	17.33	17.25	17.17	17.09	17.01	16.93
-20	18.43	18.35	18.27	18.20	18.12	18.04	17.96	17.88	17.80	17.72
-10	19.22	19.14	19.06	18.98	18.90	18.82	18.75	18.67	18.59	18.51
0	20.00	19.92	19.84	19.77	19.69	19.61	19.53	19.45	19.37	19.30
0	20.00	20.08	20.16	20.23	20.31	20.39	20.47	20.55	20.62	20.70
10	20.78	20.86	20.94	21.01	21.09	21.17	21.25	21.33	21.40	21.48
20	21.56	21.64	21.71	21.79	21.87	21.95	22.02	22.10	22.18	22.26
30	22.33	22.41	22.49	22.57	22.64	22.72	22.80	22.88	22.95	23.03
40	23.11	23.19	23.26	23.34	23.42	23.49	23.57	23.65	23.73	23.80
50	23.88	23.96	24.03	24.11	24.19	24.26	24.34	24.42	24.49	24.57
60	24.65	24.73	24.80	24.88	24.96	25.03	25.11	25.19	25.26	25.34
70	25.42	25.49	25.57	25.64	25.72	25.80	25.87	25.95	26.03	26.10
80	26.18	26.26	26.33	26.41	26.48	26.56	26.64	26.71	26.79	26.87
90	26.94	27.02	27.09	27.17	27.25	27.32	27.40	27.47	27.55	27.63
100	27.70	27.78	27.85	27.93	28.00	28.08	28.16	28.23	28.31	28.38
110	28.46	28.53	28.61	28.69	28.76	28.84	28.91	28.99	29.06	29.14
120	29.21	29.29	29.36	29.44	29.51	29.59	29.67	29.74	29.82	29.89
130	29.97	30.04	30.12	30.19	30.27	30.34	30.42	30.49	30.57	30.64
140	30.72	30.79	30.87	30.94	31.02	31.09	31.17	31.24	31.32	31.39
150	31.47	31.54	31.61	31.69	31.76	31.84	31.91	31.99	32.06	32.14
160	32.21	32.29	32.36	32.43	32.51	32.58	32.66	32.73	32.81	32.88
170	32.95	33.03	33.10	33.18	33.25	33.33	33.40	33.47	33.55	33.62
180	33.70	33.77	33.84	33.92	33.99	34.07	34.14	34.21	34.29	34.36
190	34.43	34.51	34.58	34.66	34.73	34.80	34.88	34.95	35.02	35.10
200	35.17	35.24	35.32	35.39	35.47	35.54	35.61	35.69	35.76	35.83
210	35.91	35.98	36.05	36.13	36.20	36.27	36.34	36.42	36.49	36.56
220	36.64	36.71	36.78	36.86	36.93	37.00	37.08	37.15	37.22	37.29
230	37.37	37.44	37.51	37.59	37.66	37.73	37.80	37.88	37.95	38.02
240	38.19	38.17	38.24	38.31	38.38	38.46	38.53	38.60	38.67	38.75
250	38.82	38.89	38.96	39.04	39.11	39.18	39.25	39.33	39.40	39.47
260	39.54	39.61	39.69	39.76	39.83	39.90	39.97	40.05	40.12	40.19
270	40.26	40.33	40.41	40.48	40.55	40.62	40.69	40.77	40.84	40.91
280	40.98	41.05	41.12	41.20	41.27	41.34	41.41	41.48	41.55	41.63
290	41.70	41.77	41.84	41.91	41.98	42.05	42.13	42.20	42.27	42.34
300	42.41	42.48	42.55	42.62	42.70	42.77	42.84	42.91	42.98	43.05
310	43.12	43.19	43.26	43.33	43.41	43.48	43.55	43.62	43.69	43.76
320	43.83	43.90	43.97	44.04	44.11	44.18	44.25	44.33	44.40	44.47
330	44.54	44.61	44.68	44.75	44.82	44.89	44.96	45.03	45.10	45.17
340	45.24	45.31	45.38	45.45	45.52	45.59	45.66	45.73	45.80	45.87
350	45.94	46.01	46.08	46.15	46.22	46.29	46.36	46.43	46.50	46.57
360	46.64	46.71	46.78	46.85	46.92	46.99	47.06	47.13	47.20	47.27
370	47.34	47.41	47.48	47.55	47.62	47.69	47.76	47.83	47.90	47.97
380	48.04	48.10	48.17	48.24	48.31	48.38	48.45	48.52	48.59	48.66
390	48.73	48.80	48.87	48.94	49.00	49.07	49.14	49.21	49.28	49.35
400	49.42	49.49	49.56	49.63	49.69	49.76	49.83	49.90	49.97	50.04
410	50.11	50.18	50.24	50.31	50.38	50.45	50.52	50.59	50.66	50.72
420	50.79	50.86	50.93	51.00	51.07	51.13	51.20	51.27	51.34	51.41
430	51.48	51.54	51.61	51.68	51.75	51.82	51.88	51.95	52.02	52.09
440	52.16	52.22	52.29	52.36	52.43	52.50	52.56	52.63	52.70	52.77

Note: Desired temperature values are obtained by adding temperatures in the vertical and horizontal axes. When calculating a resistance value of 105°C, read the value in the column where 100°C in the vertical axis and 5°C in the horizontal axis cross. The value will be 28.08Ω.


## environmental applications (continued)

### Pt100 Resistance - Temperature Characteristic 20 at 0°C

Temperature (°C)	0	1	2	3	4	5	6	7	8	9
450	52.84	52.90	52.97	53.04	53.11	53.17	53.24	53.31	53.38	53.44
460	53.51	53.58	53.65	53.71	53.78	53.85	53.92	53.98	54.05	54.12
470	54.19	54.25	54.32	54.39	54.46	54.52	54.59	54.66	54.72	54.79
480	54.86	54.93	54.99	55.06	55.13	55.19	55.26	55.33	55.39	55.46
490	55.53	55.60	55.66	55.73	55.80	55.86	55.93	56.00	56.06	56.13
500	56.20	56.26	56.33	56.40	56.46	56.53	56.59	56.66	56.73	56.79
510	56.86	56.93	56.99	57.06	57.13	57.19	57.26	57.32	57.39	57.46
520	57.52	57.59	57.66	57.72	57.79	57.85	57.92	57.99	58.05	58.12
530	58.18	58.25	58.32	58.38	58.45	58.51	58.58	58.64	58.71	58.78
540	58.84	58.91	58.97	59.04	59.10	59.17	59.24	59.30	59.37	59.43
550	59.50	59.56	59.63	59.69	59.76	59.82	59.89	59.96	60.02	60.09
560	60.15	60.22	60.28	60.35	60.41	60.48	60.54	60.61	60.67	60.74
570	60.80	60.87	60.93	61.00	61.06	61.13	61.19	61.26	61.32	61.39
580	61.45	61.52	61.58	61.65	61.71	61.77	61.84	61.90	61.97	62.03
590	62.10	62.16	62.23	62.29	62.36	62.42	62.48	62.55	62.61	62.68
600	62.74	-	-	-	-	-	-	-	-	-

Note: Desired temperature values are obtained by adding temperatures in the vertical and horizontal axes. When calculating a resistance value of 105°C, read the value in the column where 100°C in the vertical axis and 5°C in the horizontal axis cross. The value will be 28.08Ω.

### Derating Curve

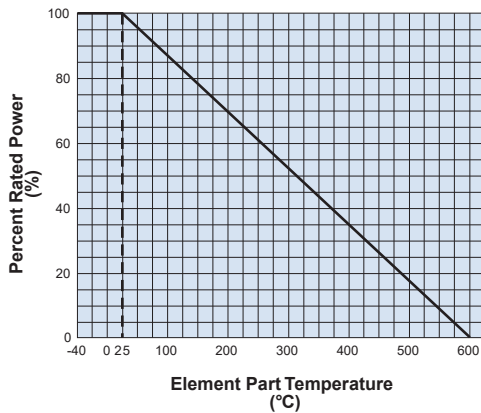


For sensors operated at an element part temperature of 25°C or above, a power rating shall be derated in accordance with the above derating curve.

### Performance Characteristics


Parameter	Requirement $\Delta R$ (%+0.05Ω)	Test Method
Resistance	Within specified tolerance	0°C
T.C.R.	Within specified T.C.R.	0°C/ +100°C
Rapid Change of Temperature	±0.5%	-55°C (30 minutes)/ +200°C (30 minutes) 1000 cycles
Moisture Resistance	±0.5%	85°C ± 2°C, 85% RH, 1000 hours, 10mA, 1.5 hr ON, 0.5 hr OFF cycle
Normal Temperature Load Life	±0.5%	25°C ± 10°C, 1000 hours, 90mA, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Load Life	±0.5%	125°C, 1000 hours, 85mA continuous turning on electricity
Mechanical Shock	±0.5%	100g's maximum, 6Dms (standard), 12.3ft/s
Vibration	±0.5%	Test from 10-2000hz 20g's for 20 minutes, 12 cycles each of 3 orientations
Component Strength	600g and more	Pull test

## features

- Characteristics are equivalent with IEC 60751<sup>-2008</sup>, JISC 1604<sup>-2013</sup>
- Small package of 1.2mm x 3mm with 1kΩ resistance
- Products meet RoHS requirements. RoHS regulation is not intended for Pb-glass contained in glass.

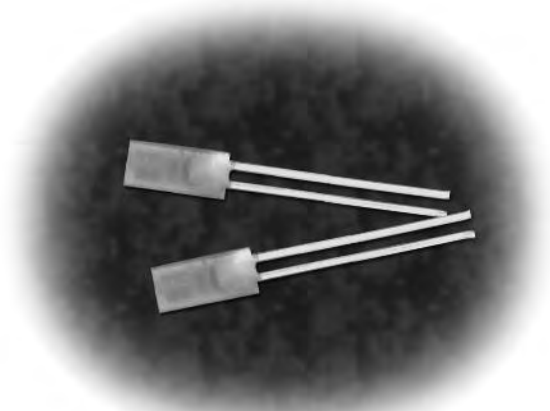

## dimensions and construction

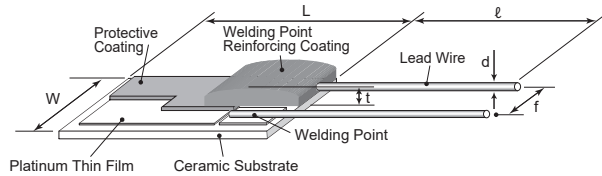

Type	Dimensions inches (mm)					
	W	L	t	f (Nom.)	d	l
SDT310HCTP	.047±.004 (1.2±0.10)	.118±.004 (3.0±0.10)	.043 max. (1.1 max.)	.002 (0.5)	.006±.002 (ø0.15±0.05)	.315 <sup>+0.079</sup> <sub>-.039</sub> (8 <sup>+2</sup> <sub>-1</sub> )

## ordering information

SDT310	H	CT	P	100	A	3850
Type	Size Code H: W=1.2mm	Operating Temperature CT: -55°C~400°C	Terminal Surface Material P: Pt clad wire	Nominal Resistance 100: 100Ω	Class A: F0.15 B: F0.3	T.C.R. (x 10 <sup>-6</sup> /K)

## applications and ratings

Part Designation	Nominal R. Value (Ω)	Tolerance		Tolerance	R. Value Tolerance (%)	T.C.R. (x10 <sup>-6</sup> /K)**	Thermal Time Constant***	Self-heating Coefficient (°C/mW)****	Specified Current*****	Temperature Range (C°)
		IEC 60751 <sup>-2008</sup> JIS C 1604 <sup>-2013</sup>	IEC 60751 <sup>-2008</sup> JIS C 1604 <sup>-1997</sup>							
SDT310HCTP	100	F0.15	Class A	±(0.15+0.002 [t])*	±0.059	3850	2.8 seconds in stationary air	0.09	1mA Max.	-55 ~ +300
		F0.3	Class B	±(0.3+0.005 [t])*	±0.12					-55 ~ +400

\* [ t ] is a measuring temperature indicated at °C that is not related to marking + · -.

\*\* T.C.R. Measuring Temperature : 0°C/+100°C.

\*\*\* Thermal time constant is value measured in stationary air and is typical value, which is value of element and vary with connecting or fixing methods.

\*\*\*\* Self-heating coefficient expressed in °C/mW is values measured at temperature : 0°C in flowing oil with a velocity >0.2m/s, which is value of elements and vary with connecting or fixing methods.

\*\*\*\*\* Specified current is a current value that is used at reliability test under the condition of self heat-generation that can be disregarded. Recommended measuring currents 1mA for 100Ω.

## environmental applications

### Performance Characteristics

Parameter	Requirement Δ R ±(%)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	0°C
T.C.R.	Within specified T.C.R.	—	0°C/ +100°C
Insulation Resistance	100MΩ or more	—	d.c. 100V
Dielectric Withstanding Voltage	±0.06%	-0.003%	a.c. 100V, 60 seconds - 70 seconds
Rapid Change of Temperature	±0.06 (F0.15 at 300°C) ±0.12 (F0.3 at 400°C)	-0.002% +0.013%	-55°C (30 minutes)/ +25°C (2 - 3 minutes)/ +300°C or +400°C (30 minutes)/ +25°C (2 - 3 minutes), 10 cycles
Moisture Resistance	±0.06%	-0.002%	60°C ± 2°C, 90 - 95% RH, 1000 hours, 1mA, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Load Life	±0.06 (F0.15 at 300°C) ±0.12 (F0.3 at 400°C)	-0.016% -0.022%	300°C or 400°C, 1000 hours, 1mA continuous turning on electricity
High Temperature Exposure	±0.06 (F0.15 at 300°C) ±0.12 (F0.3 at 400°C)	+0.004% +0.014%	+300°C or +400°C, 1000 hours
Low Temperature Exposure	±0.06%	+0.010%	-55°C, 1000 hours


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/20/18



## environmental applications (continued)

### Temperature Characteristics

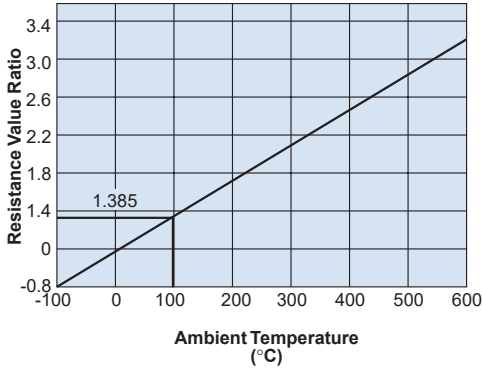

Approximate Expression for Resistance-Temperature Characteristics  
 -55°C~0°C :  $R_T = R_0 \{1 + C_1 T + C_2 T^2 + C_3 (T-100) T^3\}$   
 0°C~+400°C :  $R_T = R_0 (1 + C_1 T + C_2 T^2)$

$R_T$  : Resistance value at T°C  
 $R_0$  : Resistance value at 0°C  
 T : Ambient temperature(°C)  
 Constants  $C_1, C_2, C_3$ :  
 $C_1 = 3.908 \times 10^{-3} \text{ } ^\circ\text{C}^{-1}$   
 $C_2 = -5.775 \times 10^{-7} \text{ } ^\circ\text{C}^{-2}$   
 $C_3 = -4.183 \times 10^{-12} \text{ } ^\circ\text{C}^{-4}$

### Pt100 Resistance - Temperature Characteristic (JISC 1604<sup>-2013</sup>) 100 at 0°C


Temperature (°C)	0	-1	-2	-3	-4	-5	-6	-7	-8	-9
-50	80.31	79.91	79.51	79.11	78.72	78.32	—	—	—	—
-40	84.27	83.87	83.48	83.08	82.69	82.29	81.89	81.50	81.10	80.70
-30	88.22	87.83	87.43	87.04	86.64	86.25	85.85	85.46	85.06	84.67
-20	92.16	91.77	91.37	90.98	90.59	90.19	89.80	89.40	89.01	88.62
-10	96.09	95.69	95.30	94.91	94.52	94.12	93.73	93.34	92.95	92.55
0	100.00	99.61	99.22	98.83	98.44	98.04	97.65	97.26	96.87	96.48
	0	1	2	3	4	5	6	7	8	9
0	100.00	100.39	100.78	101.17	101.56	101.95	102.34	102.73	103.12	103.51
10	103.90	104.29	104.68	105.07	105.46	105.85	106.24	106.63	107.02	107.40
20	107.79	108.18	108.57	108.96	109.35	109.73	110.12	110.51	110.90	111.29
30	111.67	112.06	112.45	112.83	113.22	113.61	114.00	114.38	114.77	115.15
40	115.54	115.93	116.31	116.70	117.08	117.47	117.86	118.24	118.63	119.01
50	119.40	119.78	120.17	120.55	120.94	121.32	121.71	122.09	122.47	122.86
60	123.24	123.63	124.01	124.39	124.78	125.16	125.54	125.93	126.31	126.69
70	127.08	127.46	127.84	128.22	128.61	128.99	129.37	129.75	130.13	130.52
80	130.90	131.28	131.66	132.04	132.42	132.80	133.18	133.57	133.95	134.33
90	134.71	135.09	135.47	135.85	136.23	136.61	136.99	137.37	137.75	138.13
100	138.51	138.88	139.26	139.64	140.02	140.40	140.78	141.16	141.54	141.91
110	142.29	142.67	143.05	143.43	143.80	144.18	144.56	144.94	145.31	145.69
120	146.07	146.44	146.82	147.20	147.57	147.95	148.33	148.70	149.08	149.46
130	149.83	150.21	150.58	150.96	151.33	151.71	152.08	152.46	152.83	153.21
140	153.58	153.96	154.33	154.71	155.08	155.46	155.83	156.20	156.58	156.95
150	157.33	157.70	158.07	158.45	158.82	159.19	159.56	159.94	160.31	160.68
160	161.05	161.43	161.80	162.17	162.54	162.91	163.29	163.66	164.03	164.40
170	164.77	165.14	165.51	165.89	166.26	166.63	167.00	167.37	167.74	168.11
180	168.48	168.85	169.22	169.59	169.96	170.33	170.70	171.07	171.43	171.80
190	172.17	172.54	172.91	173.28	173.65	174.02	174.38	174.75	175.12	175.49
200	175.86	176.22	176.59	176.96	177.33	177.69	178.06	178.43	178.79	179.16
210	179.53	179.89	180.26	180.63	180.99	181.36	181.72	182.09	182.46	182.82
220	183.19	183.55	183.92	184.28	184.65	185.01	185.38	185.74	186.11	186.47
230	186.84	187.20	187.56	187.93	188.29	188.66	189.02	189.38	189.75	190.11
240	190.47	190.84	191.20	191.56	191.92	192.29	192.65	193.01	193.37	193.74
250	194.10	194.46	194.82	195.18	195.55	195.91	196.27	196.63	196.99	197.35
260	197.71	198.07	198.43	198.79	199.15	199.51	199.87	200.23	200.59	200.95
270	201.31	201.67	202.03	202.39	202.75	203.11	203.47	203.83	204.19	204.55
280	204.90	205.26	205.62	205.98	206.34	206.70	207.05	207.41	207.77	208.13
290	208.48	208.84	209.20	209.56	209.91	210.27	210.63	210.98	211.34	211.70
300	212.05	212.41	212.76	213.12	213.48	213.83	214.19	214.54	214.90	215.25
310	215.61	215.96	216.32	216.67	217.03	217.38	217.74	218.09	218.44	218.80
320	219.15	219.51	219.86	220.21	220.57	220.92	221.27	221.63	221.98	222.33
330	222.68	223.04	223.39	223.74	224.09	224.45	224.80	225.15	225.50	225.85
340	226.21	226.56	226.91	227.26	227.61	227.96	228.31	228.66	229.01	229.37
350	229.72	230.07	230.42	230.77	231.12	231.47	231.82	232.17	232.52	232.87
360	233.21	233.56	233.91	234.26	234.61	234.96	235.31	235.66	236.00	236.35
370	236.70	237.05	237.40	237.74	238.09	238.44	238.79	239.13	239.48	239.83
380	240.18	240.52	240.87	241.22	241.56	241.91	242.26	242.60	242.95	243.29
390	243.64	243.99	244.33	244.68	245.02	245.37	245.71	246.06	246.40	246.75
400	247.09	247.44	247.78	248.13	248.47	248.81	249.16	249.50	249.85	250.19

Note: Desired temperature values are obtained by adding temperatures in the vertical and horizontal axes.  
 When calculating a resistance value of 105°C, read the value in the column where 100°C in the vertical axis and 5°C in the horizontal axis cross. The value will be 140.40Ω.

### features

- T.C.R. is in accordance to JIS-DIN IEC standards
- The small package with a real ability of 1kΩ resistance
- Thermal time constant is improved with the small package
- Products with lead-free terminations meet EU RoHS requirements. Pb located in glass material, electrode and resistor element is exempt per Annex 1, exemption 5 of EU directive 2005/95/EC.

### dimensions and construction

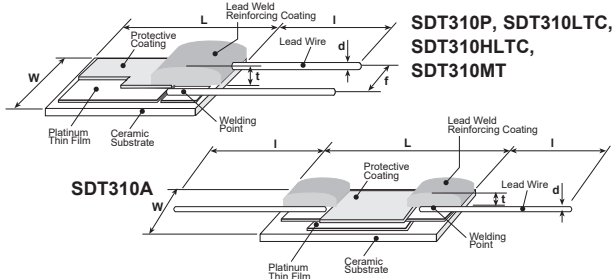

Type	Dimensions inches (mm)								
	L	W	t	f	d (Nom.)	l			
SDT310AP	.118±.010 (3.0±0.25)	.031±.008 (0.8±0.2)	.047 max. (1.2 max.)	.043±.010 (1.1±0.25)	.008±.002 (ø0.2±0.05)	.315±.079 (8±2)			
SDT310LTC		.079±.010 (2.0±0.25)				.394 <sup>+0.179</sup> <sub>-.079</sub> (10 <sup>+3</sup> <sub>-2</sub> )			
SDT310P						.315±.079 (8±2)			
SDT310MTM		.197±.004 (5.0±0.10)				.047±.004 (1.2±0.10)	.043 max. (1.1 max.)	.012±.004 (0.3±0.10)	.394 <sup>+0.179</sup> <sub>-.079</sub> (10 <sup>+3</sup> <sub>-2</sub> )
SDT310HLT									

### ordering information

SDT310	2B	LT	C	100	B	3850
Type	Size Code	Temperature Range	Terminal Surface Temperature	Nominal Resistance	Class	T.C.R. (x 10 <sup>-6</sup> /K)
	Nil: Standard A H	LT: -55°C~+155°C Nil: -55°C~+400°C MT: -55°C~+650°C	C: SnCu (SDT310LT, SDT310HLT) P: Pt clad wire (SDT310, SDT310A) M: PtIr (SDT310MT)	100: 100Ω 500: 500Ω 1K: 1kΩ 10: 10Ω (SDT310AP)	A: ±(0.15+0.002[t]) B: ±(0.3+0.005[t]) C: ±(1.0+0.01[t]) K: ±10%(SDT310A)	

### applications and ratings

Part Designation	Resistance Range @ 0°C	Tolerance Class (°C)	Resistance Tolerance	Thermal Time Constant**	Thermal Dissipation Constant**	T.C.R. (ppm/°C)*	Specified Current***	Operating Temperature Range
SDT310LTC	100Ω, 500Ω, 1kΩ	A:±(0.15+0.002 [t])	±0.059%	7 seconds in stationary air	0.9mW/°C	3850	10Ω, 100Ω 1mA Max. 500Ω, 1KΩ 0.1mA Max.	-55°C to +155°C
		B:±(0.3+0.005 [t])	±0.12%					
		C:±(1.0+0.01 [t])	±0.39%					
SDT310P	100Ω, 500Ω, 1kΩ	A:±(0.15+0.002 [t])	±0.059%					
		B:±(0.3+0.005 [t])	±0.12%					
		C:±(1.0+0.01 [t])	±0.39%					
SDT310MTM	100Ω	B:±(0.3+0.005 [t])	±0.12%					
		C:±(1.0+0.01 [t])	±0.39%					
SDT310HLT	1kΩ	A:±(0.15+0.002 [t])	±0.059%	2.8 seconds in stationary air	1.0mW/°C			-55°C to +155°C
		B:±(0.3+0.005 [t])	±0.12%					
		C:±(1.0+0.01 [t])	±0.39%					
SDT310AP	10Ω	—	±10%	6 seconds in stationary air	1.0mW/°C	3850±2%		-55°C to +400°C

\* T.C.R. measuring temperature: 0°C/+100°C.

\*\* Thermal time constant and thermal dissipation constant are values measured in stationary air and are typical values, which are values of elements and vary with connecting or fixing methods.


\*\*\* The electricity which it is charged with in the element is moved to the range that rise in temperature due to a self-heat generation can be ignored. Recommended measuring currents are 1mA for 100Ω and 0.1mA for 500Ω or 1kΩ. SDT310AP can be used as hot-film sensor. Maximum specified current is 100mA when using under self-heating condition.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/20/18

## environmental applications

### Temperature Characteristics

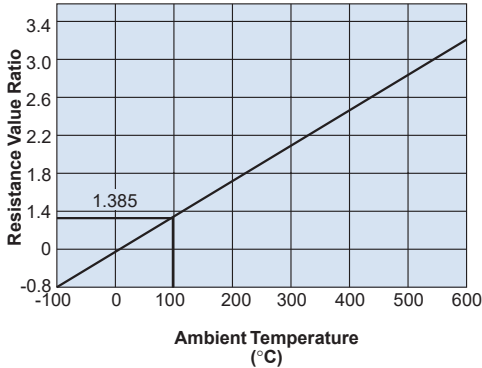

Approximate Expression for Resistance-Temperature Characteristics

$$-55^{\circ}\text{C}\sim 0^{\circ}\text{C} : R_T = R_0 \{1 + C_1 T + C_2 T^2 + C_3 (T-100) T^3\}$$

$$0^{\circ}\text{C}\sim +650^{\circ}\text{C} : R_T = R_0 (1 + C_1 T + C_2 T^2)$$

$R_T$  : Resistance value at  $T^{\circ}\text{C}$

$R_0$  : Resistance value at  $0^{\circ}\text{C}$

$T$  : Ambient temperature ( $^{\circ}\text{C}$ )

Constants  $C_1, C_2, C_3$ :

$$C_1 = 3.9083 \times 10^{-3} \text{ } ^{\circ}\text{C}^{-1}$$

$$C_2 = -5.775 \times 10^{-7} \text{ } ^{\circ}\text{C}^{-2}$$

$$C_3 = -4.183 \times 10^{-12} \text{ } ^{\circ}\text{C}^{-4}$$

### Pt100 Resistance - Temperature Characteristic (JIS C1604<sup>-1997</sup>) 100 at $0^{\circ}\text{C}$

Temperature ( $^{\circ}\text{C}$ )	0	-1	-2	-3	-4	-5	-6	-7	-8	-9
-50	80.31	79.91	79.51	79.11	78.72	78.32	—	—	—	—
-40	84.27	83.87	83.48	83.08	82.69	82.29	81.89	81.50	81.10	80.70
-30	88.22	87.83	87.43	87.04	86.64	86.25	85.85	85.46	85.06	84.67
-20	92.16	91.77	91.37	90.98	90.59	90.19	89.80	89.40	89.01	88.62
-10	96.09	95.69	95.30	94.91	94.52	94.12	93.73	93.34	92.95	92.55
0	100.00	99.61	99.22	98.83	98.44	98.04	97.65	97.26	96.87	96.48
	0	1	2	3	4	5	6	7	8	9
0	100.00	100.39	100.78	101.17	101.56	101.95	102.34	102.73	103.12	103.51
10	103.90	104.29	104.68	105.07	105.46	105.85	106.24	106.63	107.02	107.40
20	107.79	108.18	108.57	108.96	109.35	109.73	110.12	110.51	110.90	111.29
30	111.67	112.06	112.45	112.83	113.22	113.61	114.00	114.38	114.77	115.15
40	115.54	115.93	116.31	116.70	117.08	117.47	117.86	118.24	118.63	119.01
50	119.40	119.78	120.17	120.55	120.94	121.32	121.71	122.09	122.47	122.86
60	123.24	123.63	124.01	124.39	124.78	125.16	125.54	125.93	126.31	126.69
70	127.08	127.46	127.84	128.22	128.61	128.99	129.37	129.75	130.13	130.52
80	130.90	131.28	131.66	132.04	132.42	132.80	133.18	133.57	133.95	134.33
90	134.71	135.09	135.47	135.85	136.23	136.61	136.99	137.37	137.75	138.13
100	138.51	138.88	139.26	139.64	140.02	140.40	140.78	141.16	141.54	141.91
110	142.29	142.67	143.05	143.43	143.80	144.18	144.56	144.94	145.31	145.69
120	146.07	146.44	146.82	147.20	147.57	147.95	148.33	148.70	149.08	149.46
130	149.83	150.21	150.58	150.96	151.33	151.71	152.08	152.46	152.83	153.21
140	153.58	153.96	154.33	154.71	155.08	155.46	155.83	156.20	156.58	156.95
150	157.33	157.70	158.07	158.45	158.82	159.19	159.56	159.94	160.31	160.68
160	161.05	161.43	161.80	162.17	162.54	162.91	163.29	163.66	164.03	164.40
170	164.77	165.14	165.51	165.89	166.26	166.63	167.00	167.37	167.74	168.11
180	168.48	168.85	169.22	169.59	169.96	170.33	170.70	171.07	171.43	171.80
190	172.17	172.54	172.91	173.28	173.65	174.02	174.38	174.75	175.12	175.49
200	175.86	176.22	176.59	176.96	177.33	177.69	178.06	178.43	178.79	179.16
210	179.53	179.89	180.26	180.63	180.99	181.36	181.72	182.09	182.46	182.82
220	183.19	183.55	183.92	184.28	184.65	185.01	185.38	185.74	186.11	186.47
230	186.84	187.20	187.56	187.93	188.29	188.66	189.02	189.38	189.75	190.11
240	190.47	190.84	191.20	191.56	191.92	192.29	192.65	193.01	193.37	193.74
250	194.10	194.46	194.82	195.18	195.55	195.91	196.27	196.63	196.99	197.35
260	197.71	198.07	198.43	198.79	199.15	199.51	199.87	200.23	200.59	200.95
270	201.31	201.67	202.03	202.39	202.75	203.11	203.47	203.83	204.19	204.55
280	204.90	205.26	205.62	205.98	206.34	206.70	207.05	207.41	207.77	208.13
290	208.48	208.84	209.20	209.56	209.91	210.27	210.63	210.98	211.34	211.70
300	212.05	212.41	212.76	213.12	213.48	213.83	214.19	214.54	214.90	215.25
310	215.61	215.96	216.32	216.67	217.03	217.38	217.74	218.09	218.44	218.80
320	219.15	219.51	219.86	220.21	220.57	220.92	221.27	221.63	221.98	222.33
330	222.68	223.04	223.39	223.74	224.09	224.45	224.80	225.15	225.50	225.85
340	226.21	226.56	226.91	227.26	227.61	227.96	228.31	228.66	229.02	229.37
350	229.72	230.07	230.42	230.77	231.12	231.47	231.82	232.17	232.52	232.87
360	233.21	233.56	233.91	234.26	234.61	234.96	235.31	235.66	236.00	236.35
370	236.70	237.05	237.40	237.74	238.09	238.44	238.79	239.13	239.48	239.83
380	240.18	240.52	240.87	241.22	241.56	241.91	242.26	242.60	242.95	243.29
390	243.64	243.99	244.33	244.68	245.02	245.37	245.71	246.06	246.40	246.75
400	247.09	247.44	247.78	248.13	248.47	248.81	249.16	249.50	249.85	250.19
410	250.53	250.88	251.22	251.56	251.91	252.25	252.59	252.93	253.28	253.62
420	253.96	254.30	254.65	254.99	255.33	255.67	256.01	256.35	256.70	257.04
430	257.38	257.72	258.06	258.40	258.74	259.08	259.42	259.76	260.10	260.44
440	260.78	261.12	261.46	261.80	262.14	262.48	262.82	263.16	263.50	263.84

Note: Desired temperature values are obtained by adding temperatures in the vertical and horizontal axes. When calculating a resistance value of  $105^{\circ}\text{C}$ , read the value in the column where  $100^{\circ}\text{C}$  in the vertical axis and  $5^{\circ}\text{C}$  in the horizontal axis cross. The value will be  $140.40\Omega$ . The value for  $500\Omega$  at  $0^{\circ}\text{C}$  will be the value obtained by multiplying the resistance value in this table by 5. Similarly, the value for  $1\text{K}\Omega$  at  $0^{\circ}\text{C}$  will be the value obtained by multiplying the resistance value by 10.

### environmental applications (continued)

#### Pt100 Resistance - Temperature Characteristic (JIS C1604<sup>-1997</sup>) 100 at 0°C

Temperature (°C)	0	1	2	3	4	5	6	7	8	9
450	264.18	264.52	264.86	265.20	265.53	265.87	266.21	266.55	266.89	267.22
460	267.56	267.90	268.24	268.57	268.91	269.25	269.59	269.92	270.26	270.60
470	270.93	271.27	271.61	271.94	272.28	272.61	272.95	273.29	273.62	273.96
480	274.29	274.63	274.96	275.30	275.63	275.97	276.30	276.64	276.97	277.31
490	277.64	277.98	278.31	278.64	278.98	279.31	279.64	279.98	280.31	280.64
500	280.98	281.31	281.64	281.98	282.31	282.64	282.97	283.31	283.64	283.97
510	284.30	284.63	284.97	285.30	285.63	285.96	286.29	286.62	286.95	287.29
520	287.62	287.95	288.28	288.61	288.94	289.27	289.60	289.93	290.26	290.59
530	290.92	291.25	291.58	291.91	292.24	292.56	292.89	293.22	293.55	293.88
540	294.21	294.54	294.86	295.19	295.52	295.85	296.18	296.50	296.83	297.16
550	297.49	297.81	298.14	298.47	298.80	299.12	299.45	299.78	300.10	300.43
560	300.75	301.08	301.41	301.73	302.06	302.38	302.71	303.03	303.36	303.69
570	304.01	304.34	304.66	304.98	305.31	305.63	305.96	306.28	306.61	306.93
580	307.25	307.58	307.90	308.23	308.55	308.87	309.20	309.52	309.84	310.16
590	310.49	310.81	311.13	311.45	311.78	312.10	312.42	312.74	313.06	313.39
600	313.71	314.03	314.35	314.67	314.99	315.31	315.64	315.96	316.28	316.60
610	316.92	317.24	317.56	317.88	318.20	318.52	318.84	319.16	319.48	319.80
620	320.12	320.43	320.75	321.07	321.39	321.71	322.03	322.35	322.67	322.98
630	323.30	323.62	323.94	324.26	324.57	324.89	325.21	325.53	325.84	326.16
640	326.48	326.79	327.11	327.43	327.74	328.06	328.38	328.69	329.01	329.32

Note: Desired temperature values are obtained by adding temperatures in the vertical and horizontal axes. When calculating a resistance value of 105°C, read the value in the column where 100°C in the vertical axis and 5°C in the horizontal axis cross. The value will be 140.40Ω. The value for 500Ω at 0°C will be the value obtained by multiplying the resistance value in this table by 5. Similarly, the value for 1KΩ at 0°C will be the value obtained by multiplying the resistance value by 10.

### Performance Characteristics


Parameter	Requirement Δ R (%+0.05Ω)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	0°C
T.C.R.	Within specified T.C.R.	—	0°C/ +100°C
Insulation Resistance	100MΩ or more	—	d.c. 100V
Dielectric Withstanding Voltage	±0.12%	±0.010%	a.c. 100V, 60 seconds - 70 seconds
Resistance to Solder Heat	±0.5%	±0.014%	350°C for 3.5 seconds
Rapid Change of Temperature	±0.12%	-0.026%	-55°C (30 minutes)/ +25°C (2 - 3 minutes)/ +155°C (30 minutes)/ +25°C (2 - 3 minutes), 10 cycles (SDT310LTC, SDT310HLTC); -55°C (30 minutes)/ +25°C (2 - 3 minutes)/ +400°C (30 minutes)/ +25°C (2 - 3 minutes), 10 cycles (SDT310P, SDT310A); +25°C (30 minutes)/ +650°C (30 minutes) 10 cycles (SDT310MTM)
Moisture Resistance	±0.5%	-0.004%	60°C ± 2°C, 90 - 95% RH, 1000 hours, 1mA, 1.5 hr ON, 0.5 hr OFF cycle
Normal Temperature Load Life	±0.5%	-0.017%	20°C ± 10°C, 1000 hours, 1mA continuous turning on electricity
High Temperature Load Life	±0.5%	-0.022%	155°C ± 2°C (SDT310LTC, SDT310HLTC), 400°C ± 8°C (SDT310P, SDT310AP), 1000 hours, 650°C ± 13°C (SDT310MTM), 250 hours, 1mA continuous turning on electricity
High Temperature Exposure	±0.12%, ±0.5% (SDT310MTM)	-0.027%, -0.060% (SDT310MTM)	+155°C (SDT310LTC, SDT310HLTC), +400°C (SDT310P, SDT310AP), +650°C (SDT310MTM), 250 hours
Low Temperature Exposure	±0.12%	-0.036%	-55°C, 250 hours



## features

- Stable characteristics even in use for a long time with an excellent environment resistance
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- AEC-Q200 Qualified (SDT101B 500Ω only)

## dimensions and construction

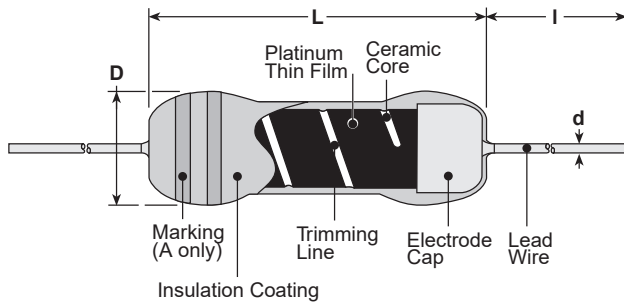

Type	Dimensions inches (mm)			
	L	D	d (Nom.)	I
SDT101A	.157±.031 (4.0±0.8)	.063±.008 (1.6±0.2)	.016±.003 (0.4±0.08)	1.18±.118 (30±3)
SDT101B	.157±.031 (4.0±0.8)	.059±.008 (1.5±0.2)	.016±.003 (0.4±0.08)	1.18±.118 (30±3)

## ordering information

SDT101	A	X	C	T26	A	100	D	F
Type	Temperature Range	Reference Temperature	Terminal Surface Material	Taping	Packaging	Nominal Resistance	Resistance Tolerance	T.C.R. Tolerance
	A: -55°C~+150°C B: -55°C~+300°C	X: 0°C Y: 25°C*	C: SnCu (A only) N: Ni (B only)	Nil: Bulk T26: 26mm taping (A only) T52: 52mm taping	Nil: Bulk A: AMMO R: Reel (B only)	10: 10Ω 100: 100Ω 500: 500Ω	D: ±0.5% F: ±1%	F: ±1% G: ±2%

\* Products of resistances measures at 25°C are also available. (But T.C.R.s will be measured at 0°C/100°C.) Consult the factory.

## applications and ratings


Part Designation	Power Rating @ 70°C*	Thermal Time Constant*	Thermal Dissipation Constant*	Resistance Range	Resistance Tolerance	T.C.R. (ppm/°C)	T.C.R. Tolerance (ppm/°C)	Rated Ambient Temperature	Operating Temperature Range
SDT101A	0.125W	6 seconds	2.8mW/°C	10Ω, 100Ω, 500Ω	D: ±0.5% F: ±1%	3500	F: ±1% G: ±2%	+70°C	-55°C to +150°C
SDT101B		9 seconds	1.8mW/°C					+200°C	-55°C to +300°C

\* Thermal time constant and thermal dissipation constant are reference values, which are values of elements and vary with connecting or fixing methods. T.C.R. measuring temperature: 0°C/+100°C




## environmental applications

### Derating Curve

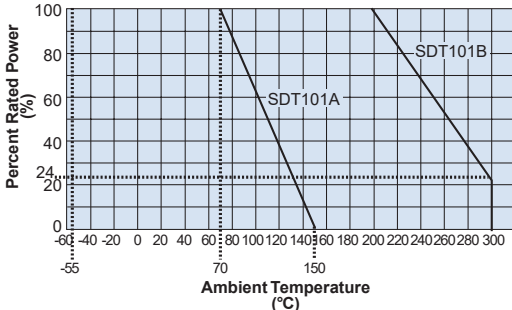

For sensors operated at an ambient temperature or above, a power rating shall be derated in accordance with the above derating curve.

### Example of Temperature Characteristics of Resistance

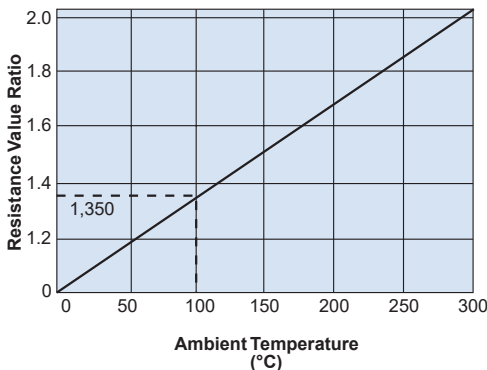

Approximate Expression for Resistance-Temperature Characteristics

$R_T$ : Resistance value at  $T^\circ\text{C}$

$R_0$ : Resistance value at  $0^\circ\text{C}$

$T$ : Ambient temperature ( $^\circ\text{C}$ )

Constants  $C_1, C_2$ :

$$C_1 = 0.356297 \times 10^{-2} \quad C_2 = 0.617945 \times 10^{-6}$$

### Resistance - Temperature Characteristic (Typical Value)

Temperature ( $^\circ\text{C}$ )	0	-1	-2	-3	-4	-5	-6	-7	-8	-9
-50	82.04	81.67	81.31	80.94	80.58	80.22	—	—	—	—
-40	85.66	85.29	84.93	84.57	84.21	83.85	83.49	83.12	82.76	82.40
-30	89.26	88.90	88.54	88.18	87.82	87.46	87.10	86.74	86.38	86.02
-20	92.85	92.49	92.13	91.78	91.42	91.06	90.70	90.34	89.98	89.62
-10	96.43	96.07	95.72	95.36	95.00	94.64	94.29	93.93	93.57	93.21
0	100.00	99.64	99.29	98.93	98.57	98.22	97.86	97.50	97.15	96.79
10	103.56	103.20	102.84	102.48	102.12	101.76	101.40	101.04	100.68	100.32
20	107.11	106.75	106.39	106.03	105.67	105.31	104.95	104.59	104.23	103.87
30	110.66	110.30	109.94	109.58	109.22	108.86	108.50	108.14	107.78	107.42
40	114.21	113.85	113.49	113.13	112.77	112.41	112.05	111.69	111.33	110.97
50	117.76	117.40	117.04	116.68	116.32	115.96	115.60	115.24	114.88	114.52
60	121.31	120.95	120.59	120.23	119.87	119.51	119.15	118.79	118.43	118.07
70	124.86	124.50	124.14	123.78	123.42	123.06	122.70	122.34	121.98	121.62
80	128.41	128.05	127.69	127.33	126.97	126.61	126.25	125.89	125.53	125.17
90	131.96	131.60	131.24	130.88	130.52	130.16	129.80	129.44	129.08	128.72
100	135.51	135.15	134.79	134.43	134.07	133.71	133.35	132.99	132.63	132.27
110	139.06	138.70	138.34	137.98	137.62	137.26	136.90	136.54	136.18	135.82
120	142.61	142.25	141.89	141.53	141.17	140.81	140.45	140.09	139.73	139.37
130	146.16	145.80	145.44	145.08	144.72	144.36	144.00	143.64	143.28	142.92
140	149.71	149.35	148.99	148.63	148.27	147.91	147.55	147.19	146.83	146.47
150	153.26	152.90	152.54	152.18	151.82	151.46	151.10	150.74	150.38	150.02
160	156.81	156.45	156.09	155.73	155.37	155.01	154.65	154.29	153.93	153.57
170	160.36	160.00	159.64	159.28	158.92	158.56	158.20	157.84	157.48	157.12
180	163.91	163.55	163.19	162.83	162.47	162.11	161.75	161.39	161.03	160.67
190	167.46	167.10	166.74	166.38	166.02	165.66	165.30	164.94	164.58	164.22
200	171.01	170.65	170.29	169.93	169.57	169.21	168.85	168.49	168.13	167.77
210	174.56	174.20	173.84	173.48	173.12	172.76	172.40	172.04	171.68	171.32
220	178.11	177.75	177.39	177.03	176.67	176.31	175.95	175.59	175.23	174.87
230	181.66	181.30	180.94	180.58	180.22	179.86	179.50	179.14	178.78	178.42
240	185.21	184.85	184.49	184.13	183.77	183.41	183.05	182.69	182.33	181.97
250	188.76	188.40	188.04	187.68	187.32	186.96	186.60	186.24	185.88	185.52
260	192.31	191.95	191.59	191.23	190.87	190.51	190.15	189.79	189.43	189.07
270	195.86	195.50	195.14	194.78	194.42	194.06	193.70	193.34	192.98	192.62
280	199.41	199.05	198.69	198.33	197.97	197.61	197.25	196.89	196.53	196.17
290	202.96	202.60	202.24	201.88	201.52	201.16	200.80	200.44	200.08	199.72
300	206.51	206.15	205.79	205.43	205.07	204.71	204.35	203.99	203.63	203.27

Note: Desired temperature values are obtained by adding temperatures in the vertical and horizontal axes. When calculating a resistance value of  $105^\circ\text{C}$ , read the value in the column where  $100^\circ\text{C}$  in the vertical axis and  $5^\circ\text{C}$  in the horizontal axis cross. The value will be  $136.72\Omega$ . The value for  $500\Omega$  at  $0^\circ\text{C}$  will be the value obtained by multiplying the resistance value in this table by 5. Similarly, the value for  $10\Omega$  at  $0^\circ\text{C}$  will be the value obtained by dividing the resistance value by 10.

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	$0^\circ\text{C}$
T.C.R.	Within specified T.C.R.	—	$0^\circ\text{C}/ +100^\circ\text{C}$
Overload (Short Time)	$\pm 0.5\%$	$\pm 0.2\%$	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat (SDT101A)	$\pm 0.3\%$	$\pm 0.1\%$	$350^\circ\text{C}$ , 1 second
Rapid Change of Temperature	$\pm 0.5\%$	$\pm 0.2\%$	$-55^\circ\text{C}$ (30 minutes)/ $+25^\circ\text{C}$ (10 minutes)/ $+150^\circ\text{C}$ (30 minutes)/ $+25^\circ\text{C}$ (10 minutes), 5 cycles
Moisture Resistance	$\pm 1\%$	$\pm 0.3\%$	$80^\circ\text{C} \pm 2^\circ\text{C}$ , 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at $70^\circ\text{C}$	$\pm 1\%$	$\pm 0.2\%$	$70^\circ\text{C} \pm 3^\circ\text{C}$ (SDT101A), $200^\circ\text{C} \pm 3^\circ\text{C}$ (SDT101B), 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	$\pm 1\%$	$\pm 0.7\%$	$+150^\circ\text{C}$ (SDT101A), $+300^\circ\text{C}$ (SDT101B), 1000 hours
Shelf Life	$\pm 0.3\%$	$\pm 0.1\%$	Left for 1 year on shelf in natural condition

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/19/12





### features

- All ST-series thermal sensors are custom-made products. ST-series thermal sensors are designed in various shapes in accordance with your application using a platinum thin-film thermal sensor (SDT101, SDT310 series) as an element. Shapes of sensor parts can be designed flexibly to meet your shapes and dimensional needs, from simple resin mold parts to sensor parts sealed in metal protective tubes made of SUS316.

### ordering information

#### ST3000 Series

ST	31050201	F	A	X	1K	B	D
Type	Type Number	Pb Free Symbol	Element Type	Reference Temperature	Nominal Resistance**	Resistance Tolerance**	T.C.R. Tolerance
			A: SDT101	X: 0°C	100: 100Ω 500: 500Ω 1K: 1kΩ	B: ±0.1% C: ±0.2% D: ±0.5% F: ±1%	D: ±0.5% F: ±1% G: ±2%

\* ST3000 series products with a reference temperature of 25°C (T.C.R. will be calculated between 0°C/100°C.) are also available. Contact us.

\*\*These are specified for inner element only

#### ST8100 Series

ST	8102201	F	B	X	1K	B
Type	Type Number	Pb Free Symbol	Element Type	Reference Temperature	Nominal Resistance	Class
			B: SDT310LTC C: SDT310P	X: 0°C	100: 100Ω 500: 500Ω 1K: 1kΩ	B: ±(0.3+0.005 [t]) C: ±(1.0+0.01 [t])

### applications and ratings

Part Designation	Element	Resistance Value at 0°C	Class: Tolerance to Measuring Temperature	Resistance Tolerance	T.C.R. (x 10 <sup>-6</sup> /K)	T.C.R. Tolerance (ppm/°C)
ST3000	SDT101A SDT101B	100Ω 500Ω 1kΩ	—	B: ±0.1% C: ±0.2% D: ±0.5% F: ±1%	3500	D: ±0.5% F: ±1% G: ±2%
ST8100	SDT310LTC SDT310P	100Ω 500Ω 1kΩ	B: ±(0.3+0.005[t]) C: ±(1.0+0.01[t])	—	3850	—

\* ST3000 Series, 1kΩ, resistance tolerance B • C are produced in pair of SDT101Series. The combination of ST3000 series, resistance tolerance B-T.C.R. and tolerance D is equivalent to class B of SDT310 tolerance to the measuring temperature.









In the above table specification there are restrictions on manufacturing range depending on part number. Please refer to the Performance list.

### environmental applications

Example of	Material	Example of	Material	Example of	Form
Processing Protective Tubes	PPS	Processing External Conductors	Polyurethane coated wire	Processing of Terminals	Processing of connecting terminals
	Epoxy resin coating		Parallel heat-resistant vinyl chloride wire		
	Fluorine resin shrinkage tube		Fluorine resin coated wire		
	Polyimide		<b>Form</b>		
	SUS304		2-wire system	Others	Mounting on printed circuit board
	SUS316		3-wire, 4-wire system		
Cu	Shielded wire				





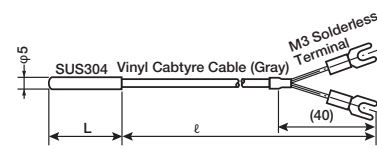
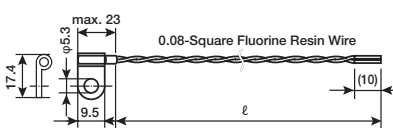
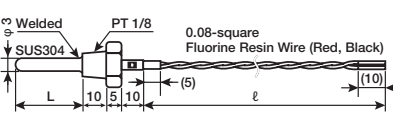
## environmental applications

### Performance Characteristics - ST3000 series (A part extract)

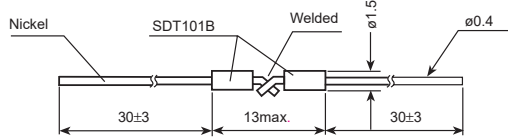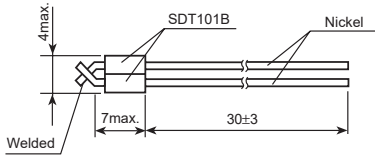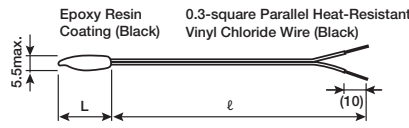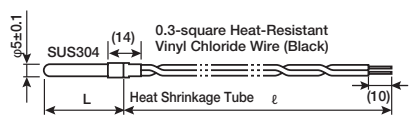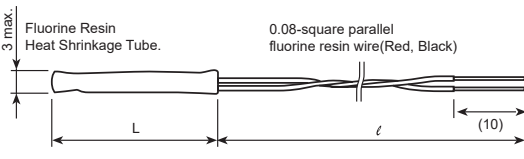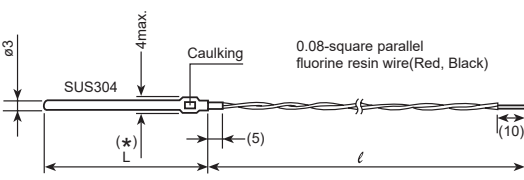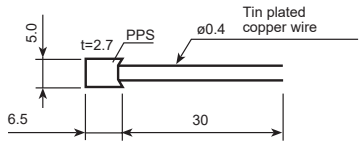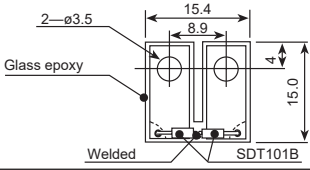Shape	Unit: mm	Product Number	L (mm)	ℓ (m)	Measurement Temp. Range
 <p>Nickel SDT101B Welded ø1.5 ø0.4 30±3 13max. 30±3</p>		31011 Lead wire without solder plating	—	—	-50°C ~ +300°C
		31012 Lead wire with solder plating	—	—	-40°C ~ +120°C
 <p>SDT101B Nickel Welded 4max. 7max. 30±3</p>		31021 Lead wire without solder plating	—	—	-50°C ~ +300°C
		31022 Lead wire with solder plating	—	—	-40°C ~ +120°C
 <p>Epoxy Resin Coating (Black) 0.3-square Parallel Heat-Resistant Vinyl Chloride Wire (Black) 5.5max. L ℓ (10)</p>		31030201	30 max.	0.1	-40°C ~ +100°C
		31030205		0.5	
		31030210		1.0	
		31030230		3.0	
 <p>SUS304 0.3-square Heat-Resistant Vinyl Chloride Wire (Black) Heat Shrinkage Tube φ5±0.1 (14) L ℓ (10)</p>		31040301	35	0.1	-40°C ~ +100°C
		31040305		0.5	
		31040310		1.0	
		31040330		3.0	
 <p>Fluorine Resin Heat Shrinkage Tube. 0.08-square parallel fluorine resin wire (Red, Black) 3 max. L ℓ (10)</p>		31050201	23 max.	0.1	-40°C ~ +220°C
		31050205		0.5	
		31050210		1.0	
		31050230		3.0	
 <p>SUS304 Caulking 0.08-square parallel fluorine resin wire (Red, Black) ø3 4max. L (*) (5) ℓ (10)</p> <p>* For product of resistance 1kΩ or product of resistance tolerance B, C, L=50mm is only available.</p>		31060301	30	0.1	-40°C ~ +220°C
		31060305		0.5	
		31060310		1.0	
		31060330		3.0	
		31060501	50	0.1	
		31060505		0.5	
		31060510		1.0	
		31060530		3.0	
 <p>5.0 t=2.7 PPS ø0.4 Tin plated copper wire 6.5 30</p>		3201	—	—	-20°C ~ +120°C
 <p>2-ø3.5 Glass epoxy Welded SDT101B 15.4 8.9 15.0</p>		3202	—	—	-40°C ~ +140°C






**environmental applications** (continued)

**Performance Characteristics - ST3000 series (A part extract)**

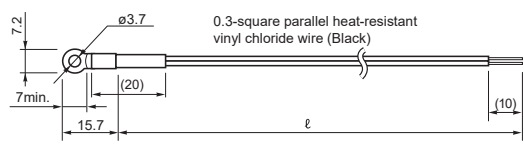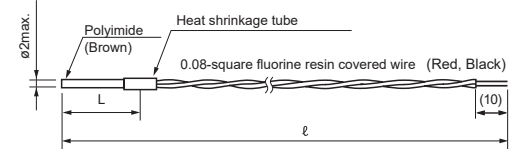Shape	Unit: mm	Product Number	L (mm)	ℓ (m)	Measurement Temp. Range
 <p>0.3-square parallel heat-resistant vinyl chloride wire (Black)</p>		32050001	—	0.1	-20°C ~ +80°C
		32050005		0.5	
		32050010		1.0	
		32050030		3.0	
 <p>Polyimide (Brown) Heat shrinkage tube 0.08-square fluorine resin covered wire (Red, Black)</p>		32090201	24	0.1	-40°C ~ +120°C
		32090205		0.5	
		32090210		1.0	
		32090230		3.0	
 <p>SUS304 90° 29 32.5 15-20R 10 12 ℓ</p>		32120907	90	0.7	-40°C ~ +300°C Only top of protective tubes
		32121207	120	0.7	
		32121707	175	0.7	
		32121202	120	0.2	
 <p>Coated Polyurethane Coated Wire (Brown)</p>		33010004	(8)	0.4	-20°C ~ +80°C
Products with resistance value 1K or resistance tolerance B, C are not manufactured					
 <p>SUS304 Vinyl Cable (Gray) M3 Solderless Terminal</p>		33040305	35	0.5	-40°C ~ +160°C
		33040310		1.0	
		33040330		3.0	
 <p>0.08-Square Fluorine Resin Wire</p>		33060001	—	0.1	-20°C ~ +120°C
		33060005		0.5	
		33060010		1.0	
		33060030		3.0	
 <p>Welded SUS304 PT 1/8 0.08-square Fluorine Resin Wire (Red, Black)</p>		33110305	30	0.5	-40°C ~ +220°C
		33110310		1.0	
		33110330		3.0	

## environmental applications (continued)

### Performance Characteristics - ST8100 series

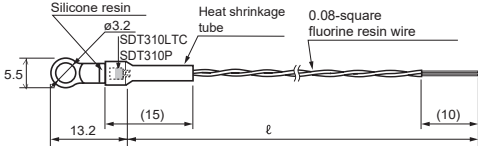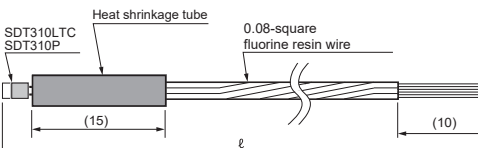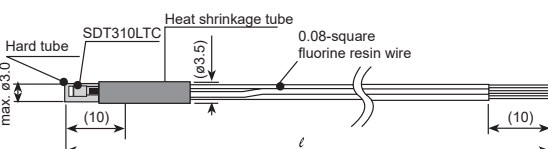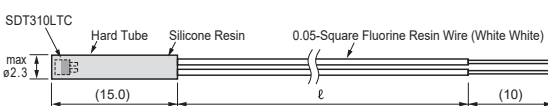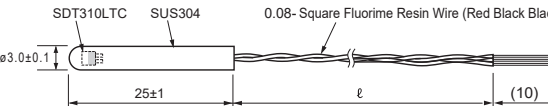Shape	Unit: mm	Product Number	Lead Wire Number	ℓ (m)	Measurement Temp. Range
 <p>2 wire: Red Black 3 wire: Red Black Black</p>		8102201	2	0.1	SDT310LTC: -40°C ~ +105°C SDT310P: -40°C ~ +200°C
		8102205		0.5	
		8102210		1.0	
		8102301	3	0.1	
		8102305		0.5	
		8102310		1.0	
 <p>2 wire: Red Black 3 wire: Red Black Black</p>		8103201	2	0.1	SDT310LTC: -40°C ~ +105°C SDT310P: -40°C ~ +200°C
		8103205		0.5	
		8103210		1.0	
		8103301	3	0.1	
		8103305		0.5	
		8103310		1.0	
 <p>2 wire: Red Black 3 wire: Red Black Black</p>		8104201	2	0.1	SDT310LTC Only: -40°C ~ +105°C
		8104205		0.5	
		8104210		1.0	
		8104301	3	0.1	
		8104305		0.5	
		8104310		1.0	
		8106201	2	0.1	SDT310LTC Only: -40°C ~ +125°C
		8106205		0.5	
		8106210		1.0	
		8107301	3	0.1	SDT310LTC Only: -40°C ~ +150°C
		8107305		0.5	
		8107310		1.0	

## guarantee of product

The guaranteed term of the product is one year after delivery. However, when trouble occurs during the guaranteed term because of our responsibility, the product is exchanged or is repaired. We guarantee the product itself, any damages caused by this product shall be excused.

## features

- The platinum thin-film thermal sensor realizes high and long-term stability
- The small platinum thin-film thermal sensor and an even temperature differential operating circuit ensure a quick response
- The built-in temperature compensation circuit assures correct values regardless of air temperature. The air velocity sensor and air velocity temperature compensation sensor are sensors with the same characteristics to enable correct temperature compensation
- Products have no rotating mechanism and are resistant to vibrations
- Products are compact and light, and are easy to be installed in equipment


## dimensions and construction

Size	Dimensions inches (mm)											
	A	B	C	D	E	F	G	H	I	J	K	L
AFS0001	.984 (25)	.197 (5)	2- $\phi$ .126 (2- $\phi$ 3.2)	.512 (13)	$\phi$ .118 ( $\phi$ 3)	.984 (25)	1.57 (40)	.217 (5.5)	.177 (4.5)	$\phi$ .118 ( $\phi$ 3)	.630 (16)	2- $\phi$ .126 (2- $\phi$ 3.2)


Size	Dimensions inches (mm)																
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
AFS0002	1.10 (28)	.787 (20)	.157 (4)	2- $\phi$ .126 (2- $\phi$ 3.2)	.394 (10)	.118 (3)	1.38 (35)	1.12 (28.5)	.138 (3.5)	.079 (2)	.630 (16)	.787 (20)	.197 ( $\phi$ 5)	.069 (1.76)	$\phi$ .126 (3.2)	R.126 (R3.2)	2- $\phi$ .079 (2- $\phi$ 2.0)

### AFS0001

Units: inches (mm)

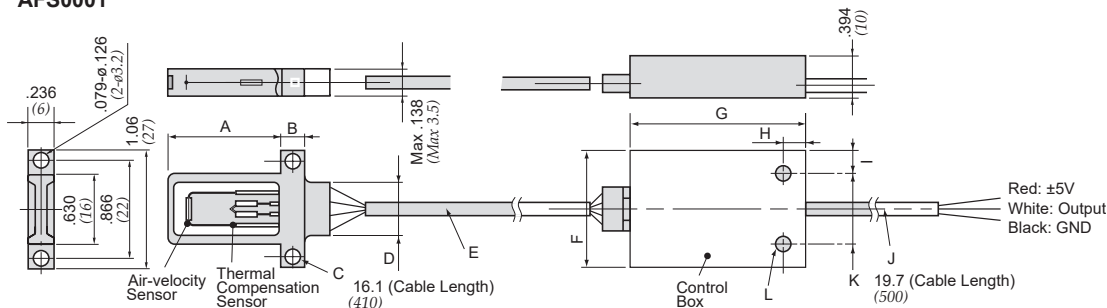

### AFS0002

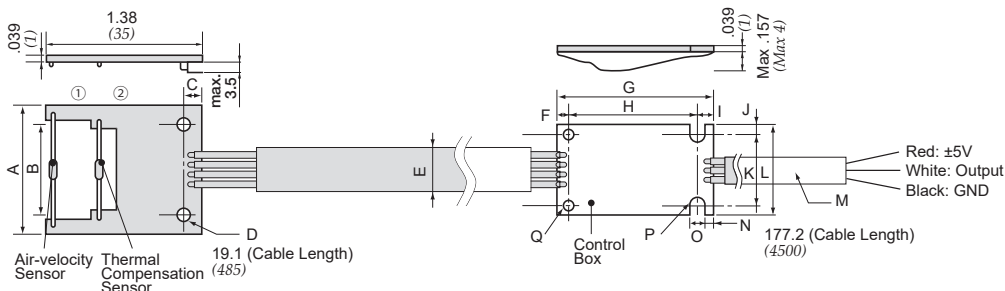

## ordering information


AFS	-	0001
Type		Type Number
		0001
		0002

## applications and ratings

Test Items	AFS-0001	AFS-0002	Remarks
Detection Object	Clean air, ordinary pressure		
Detection Range (m/s)	0 - 15		
Detection Accuracy (m/s)	±0.3%	±0.5%	0.5 - 1.0 (less than 1.0) m/s
	±0.5%	±0.7%	1.0 - 4.0 (less than 4.0) m/s
	—	±2.0%	4.0 - 12 (less than 12) m/s
	—	±3.0%	12 - 15 m/s
	±1.5%	—	4.0 - 15 m/s
Power Supply Voltage (V)	5.0 ± 0.25		
Current Consumption (A)	0.2 maximum		Start-up time is excluded
Output Voltage (V)	1.8 - 3.2	1.9 - 3.5	Non-linear analog (see Output Characteristics Diagram)
Output Impedance (Ω)	100 typical		
Start-up Time (S)	15 typical		
Operating Temperature Range (°C)	0 - +60		
Operating Humidity Range (%RH)	30 - 85		Dew condensation not allowed
Storage Temperature Range (°C)	-10 - +70		
Storage Humidity Range (%RH)	30 - 85		Dew condensation not allowed
Temperature Compensation Range (°C)	0 - +60		

## environmental applications

### Output Characteristics Diagram

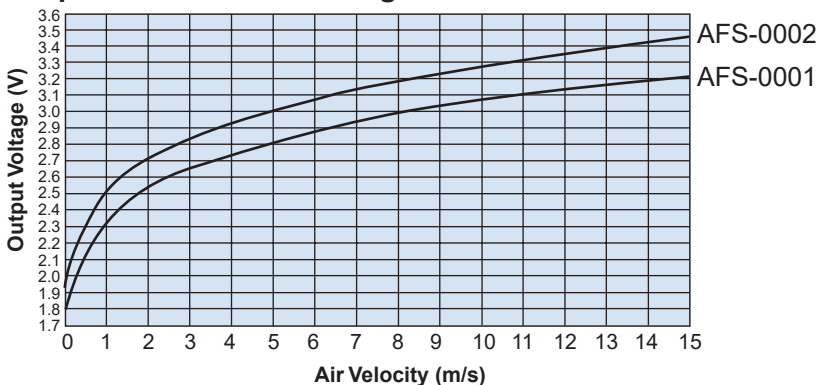




### features

- Thin film thermal sensors of SMD type
- Resistance tolerance  $\pm 1\%$ , a wide range of TCRs  $+3000 \times 10^{-6}/K \sim +5000 \times 10^{-6}/K$  with the standard products
- Suitable for control of temperatures in various industrial equipment
- Suitable for both flow and reflow soldering
- Products with lead-free terminations meet EU RoHS and China RoHS requirements



### dimensions and construction

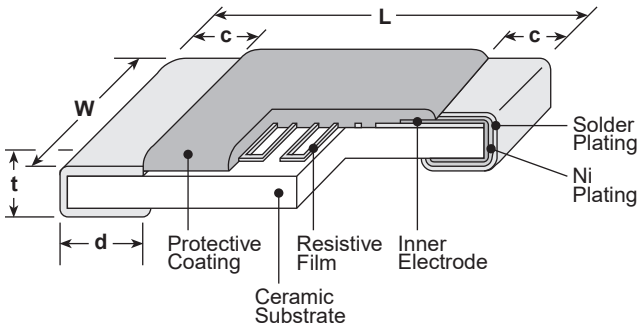

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1J</b> (0603)	.063 $\pm$ .008 (1.6 $\pm$ 0.2)	.031 $\pm$ .008 (0.8 $\pm$ 0.2)	.012 $\pm$ .008 (0.3 $\pm$ 0.2)	.012 $\pm$ .008 (0.3 $\pm$ 0.2)	.02 $\pm$ .004 (0.5 $\pm$ 0.1)
<b>2A</b> (0805)	.079 $\pm$ .008 (2.0 $\pm$ 0.2)	.049 $\pm$ .008 (1.25 $\pm$ 0.2)	.016 $\pm$ .008 (0.4 $\pm$ 0.2)	.016 $\pm$ .008 (0.4 $\pm$ 0.2)	.02 $\pm$ .006 (0.5 $\pm$ 0.15)
<b>2B</b> (1206)	.126 $\pm$ .008 (3.2 $\pm$ 0.2)	.063 $\pm$ .008 (1.6 $\pm$ 0.2)	.02 $\pm$ .012 (0.5 $\pm$ 0.3)	.02 $\pm$ .012 (0.5 $\pm$ 0.3)	.02 $\pm$ .006 (0.5 $\pm$ 0.15)

### ordering information

<b>LP73</b>	<b>2B</b>	<b>T</b>	<b>TE</b>	<b>103</b>	<b>J</b>	<b>3600</b>
Product Code	Size Code	Termination Material	Packaging	Resistance Value	Tolerance	T.C.R.
	1J: 0603 2A: 0805 2B: 1206	T: Sn	TE: 4mm embossed pitch plastic (5,000 pieces/reel)	2 significant figures + 1 multiplier 3 digits	F: $\pm 1\%$ G: $\pm 2\%$ J: $\pm 5\%$	

### applications and ratings

Part Designation	Power Rating	Thermal Time Constant (sec.)*	Thermal Dissipation Constant (mW/°C)*	Rated Ambient Temp.	Operating Temp. Range
LP731J	0.016W	2	1.2	+70°C	-55°C to +125°C
LP732A	0.031W	4	1.8		
LP732B	0.063W	6.5	2.4		

\* Thermal Time Constant and Dissipation Constant are reference values, which are values of elements and vary with connecting or fixing methods.


For further information on packaging, please refer to Appendix A.

**applications and ratings (continued)**

T.C.R. (ppm/°C) Max.	T.C.R. Tolerance	Resistance Range E-24			Resistance Tolerance
		1J	2A	2B	
3000	±5%	100Ω-1kΩ	100Ω - 2kΩ	100Ω - 10kΩ	F: ±1%, G: ±2% J: ±5%
3300					
3600					100Ω-300Ω
4000		330Ω-1kΩ			
4500		100Ω - 1kΩ			F: ±1% G: ±2% J: ±5%
5000					


**environmental applications**

**Derating Curve**

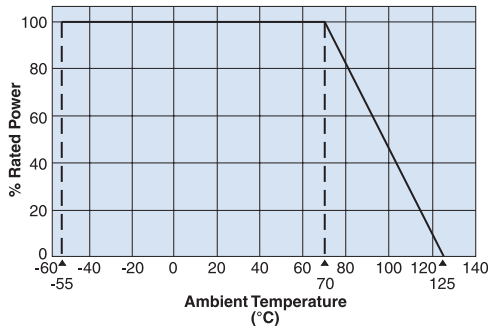

For sensors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

**Temperature Characteristics**

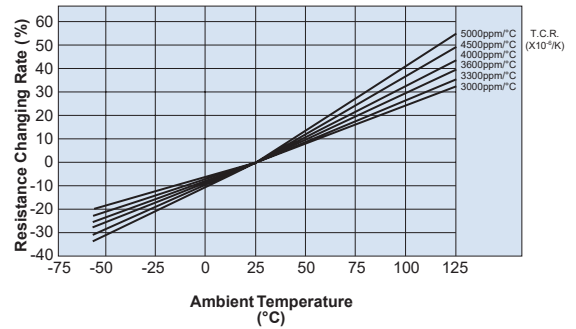

**Approximate Expression for Resistance-Temperature Characteristics**

T.C.R. (x10 <sup>-6</sup> /K)	C <sub>0</sub>	C <sub>1</sub>	C <sub>2</sub>
3000	0.931258	0.00265213	3.90112 x 10 <sup>-6</sup>
3300	0.924355	0.00292569	4.00516 x 10 <sup>-6</sup>
3600	0.916356	0.00323714	4.34428 x 10 <sup>-6</sup>
4000	0.907039	0.00361006	4.33457 x 10 <sup>-6</sup>
4500	0.897412	0.00395222	6.05201 x 10 <sup>-6</sup>
5000	0.886014	0.00437224	7.48809 x 10 <sup>-6</sup>

(Values are not guaranteed but typical)

$$R_T = R_{25} (C_0 + C_1 T + C_2 T^2)$$

RT: Resistance value at T°C  
R25: Resistance value at 25°C  
T: Ambient temperature (°C)  
C<sub>0</sub>, C<sub>1</sub>, C<sub>2</sub>: Constants

**Performance Characteristics**

Parameter	Requirement Δ R ±(%+0.05Ω)		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+65°C
Overload	±0.5%	±0.3%	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±0.5%	±0.3%	260°C ± 5°C, 10 seconds + 1 second/- 0 second
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +25°C (2-3 minutes), +125°C (30 minutes), +25°C (2-3 minutes), 5 cycles
Moisture Resistance	±2.0%	±1.5%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hours ON, 0.5 hours OFF cycle
Endurance at 70°C	±2.0%	±1.5%	70°C ± 2°C, 1000 hours, 1.5 hours ON, 0.5 hours OFF cycle

Confirming resistance drift is recommended since this product has a tendency to have bigger resistance change than general flat chip over 70°C. Please pay attention not to be applied ESD, it may cause of resistance change.

**Actual Value (Out of Guarantee)**

Test Items	Reference	Test Method
High Temperature Exposure	±8.0%	125°C, 1000 hours
ESD	500V	Human model, 100 pF 1.5 kΩ

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

1/02/14

## linear positive temperature coefficient flat chip resistors (for automotive)




### features

- SMD thin film resistors with thermo-perceptivity
- Various TCRs  $+150 - +4500 \times 10^{-6}/K$  are available
- Operating temperature range  $-155^{\circ}C$   
Rated ambient temperature:  $85^{\circ}C$
- Products meet EU RoHS requirements
- AEC-Q200 Qualified



### dimensions and construction

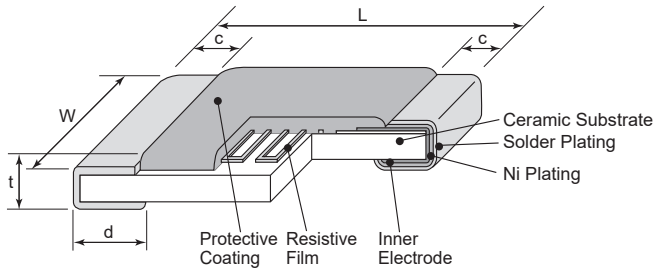

Type	Dimensions inches (mm)				
	L	W	c	d	t
<b>2A (0805)</b>	.079±.008 (2.0±0.2)	.049±.008 (1.25±0.2)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-0.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.020±.004 (0.5±0.1)
<b>2B (1206)</b>	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.020±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-0.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)

thermal sensors

### ordering information

LT73V	2B	T	TD	102	J	0900
Type	Power Rating	Termination Material	Taping	Nominal Resistance	Resistance Tolerance	T.C.R. ( $\times 10^{-6}/K$ )
	2A:0.1W 2B:0.125W	T:Sn	TD:4mm pitch paper TE:4mm pitch plastic embossed	3 digits	G:±2% J:±5%	4 digits

For further information on packaging, please refer to Appendix A.

### applications and ratings

Type	Power Rating	Max. Working Voltage	Max. Overload Voltage	Thermal Time Constant*	Thermal Dissipation Constant*	Rated Ambient Temperature	Operating Temperature Range	Taping & Q'ty/Reel (pcs)	
								TD	TE
2A	0.1W	50V	100V	1.0s	1.37mW/°C	+85°C	-55°C - +155°C	5,000	4,000
2B	0.125W	75V	150V	1.5s	1.47mW/°C			5,000	4,000

\* Thermal time constant and dissipation constant are reference values, which are values of elements and vary with connecting or fixing methods.

T.C.R. ( $\times 10^{-6}/K$ )	T.C.R. Tolerance	Resistance Range (E24)		Resistance Tolerance
		2A	2B	
150, 250, 350, 450, 500	±100×10 <sup>-6</sup> /K	2k - 15k	2k - 22k	G: ±2%
600, 700, 800, 900		1k - 8.2k	1k - 15k	
1000, 1200, 1400	±15%	1k - 6.8k	1k - 8.2k	J: ±5%
1600, 1800		510 - 4.7k	1k - 6.8k	
2000, 2200, 2400		510 - 4.7k	510 - 6.8k	
2600, 2800, 3000	±10%	510 - 3k	510 - 6.2k	
3300, 3600, 3900		100 - 1k	100 - 2k	
4200		51 - 510	51 - 510	
4500				

T.C.R. Measuring Temperature:  $+25^{\circ}C - +75^{\circ}C$

Rated voltage =  $\sqrt{\text{Power Rating} \times \text{Resistance value}}$  or Max. working voltage, whichever is lower.


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/29/17

## linear positive temperature coefficient flat chip resistors (for automotive)


### environmental applications

#### Derating Curve

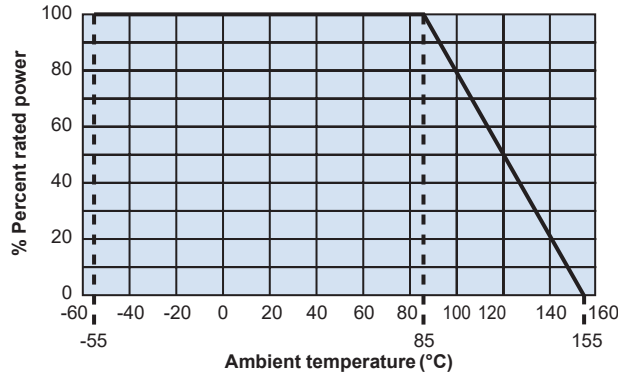

For resistors operated at an ambient temperature of 85°C or above, a power rating shall be derated in accordance with the above derating curve.

#### Temperature Characteristics of Resistance

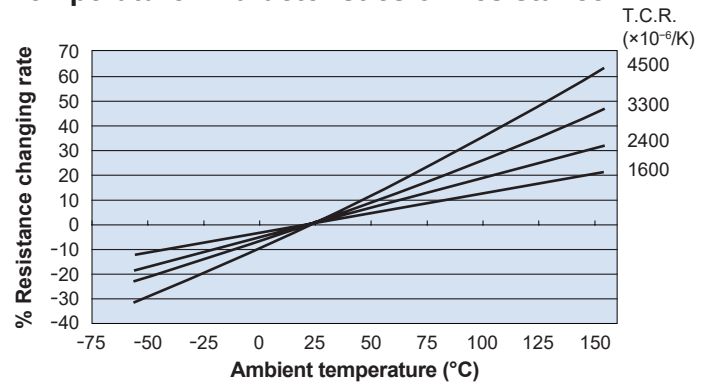

### Approximate Expression for Resistance-Temperature Characteristics

Values are not guaranteed but typical.

$$R_T = R_{25} (C_0 + C_1 T + C_2 T^2)$$

$R_T$ : Resistance value at T°C  
 $R_{25}$ : Resistance value at 25°C  
 $T$ : Ambient temperature (°C)  
 $C_0, C_1, C_2$ : Constants

T.C.R. ( $\times 10^{-6}/K$ )	$C_0$	$C_1$	$C_2$
3000	0.9288	0.0028	$1.9983 \times 10^{-6}$
3300	0.9232	0.0030	$2.9980 \times 10^{-6}$
3600	0.9175	0.0032	$4.0000 \times 10^{-6}$
3900	0.9099	0.0035	$4.0064 \times 10^{-6}$
4200	0.9026	0.0038	$3.9964 \times 10^{-6}$
4500	0.8948	0.0041	$4.0064 \times 10^{-6}$

thermal sensors


### Performance Characteristics

Parameters	Performance Requirements $\Delta R \pm (\% + 0.05\Omega)$		Test Methods
	Limit	Typical	
Resistance	Within specified tolerance	-	25°C
T.C.R.	Within specified T.C.R.	-	+25°C/+75°C
Overload (Short Time)	1%	0.02%	Rated voltage $\times 2.5$ or Max. overload Vol., whichever is lower, for 5 seconds
Resistance to Soldering Heat	1%	0.10%	260°C $\pm 5^\circ\text{C}$ , 10 seconds $\pm 1$ second
Rapid Change of Temperature	2% : $\text{TCR} \leq +3300$ 5% : $\text{TCR} \geq +3600$	0.53% 2.59%	-55°C (30min.)/+155°C (30min.), 1000 cycles
Moisture Resistance	3%	0.15%	85°C $\pm 2^\circ\text{C}$ , 85% $\pm 5\%$ RH, 1/10 rated power, 1.5h ON/0.5h OFF cycle. 1000 hours
Endurance at 85°C	2% : $\text{TCR} \leq +3300$ 5% : $\text{TCR} \geq +3600$	0.30% 0.76%	85°C $\pm 2^\circ\text{C}$ , 1000 hours 1.5h ON/0.5h OFF cycle.
High Temperature Load Life	2% : $\text{TCR} \leq +3300$ 5% : $\text{TCR} \geq +3600$	0.40% 2.17%	125°C, Rated voltage, 1000 hours
High temperature Exposure	2% : $\text{TCR} \leq +3300$ 5% : $\text{TCR} \geq +3600$	0.81% 3.20%	155°C, 1000h
Low Temperature Exposure	2%	-0.10%	-55°C, 1000h

Please pay attention not to be applied ESD, it may cause of resistance change.

### Actual Value (Out of guarantee)


Test Items	Reference	Test Methods
ESD	500V	Human Body Model, 100pF, 1.5kΩ

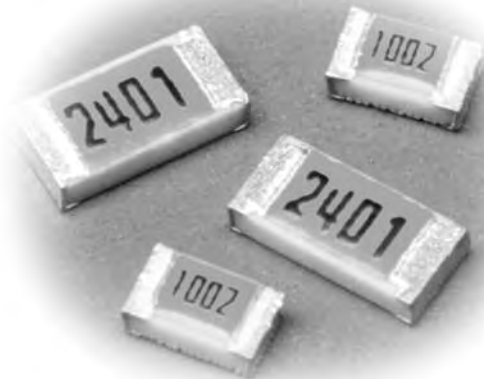

### features

- Anti-leaching nickel barrier terminations
- Twenty-five specifiable temperature characteristics
- SMD thin film resistor with thermo-perceptivity
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

### dimensions and construction

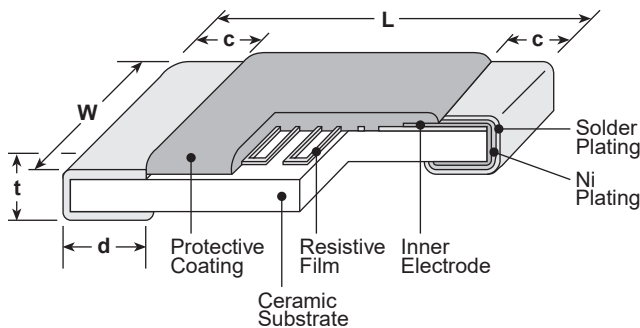

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>2A (0805)</b>	.079±.008 (2.0±0.2)	.049±.008 (1.25±0.2)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-.004</sub> (0.3 <sup>+0.2</sup> <sub>-.01</sub> )	.02±.004 (0.5±0.1)
<b>2B (1206)</b>	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.008 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-.004</sub> (0.4 <sup>+0.2</sup> <sub>-.01</sub> )	.024±.004 (0.6±0.1)

thermal sensors

### ordering information

<b>LT73</b>	<b>2B</b>	<b>T</b>	<b>TD</b>	<b>101</b>	<b>J</b>	<b>1000</b>
Type	Size Code 2A: 0805 2B: 1206	Termination Material T: Sn (Other termination styles available, contact factory for options)	Packaging TD: 7" paper taping (5,000 pieces/reel) TE: 7" embossed plastic (4,000 pieces/reel)	Resistance Value 2 significant figures + 1 multiplier	Tolerance G: ±2% J: ±5%	T.C.R.

### applications and ratings

Part Designation	Power Rating	Maximum Working Voltage	Maximum Overload Voltage	Thermal Time Constant	Thermal Dissipation Constant	Rated Ambient Temperature	Operating Temperature Range
LT732A	0.1W	50V	100V	1.0s	1.37mW/°C	+70°C	-40°C to +125°C
LT322B	0.125W	75V	150V	1.5s	1.47mW/°C		

Thermal time constant and dissipation constant are reference values, which are values of elements and vary with connecting or fixing methods.

For further information on packaging, please refer to Appendix A.

## applications and ratings


T.C.R. ( $\times 10^{-6}/K$ )	T.C.R. Tolerance	Resistance Range E-24		Resistance Tolerance
		LT732A	LT732B	
150, 250, 350, 450, 500	$\pm 100 \times 10^{-6}/K$	2k $\Omega$ - 24k $\Omega$	2k $\Omega$ - 51k $\Omega$	G: $\pm 2\%$
600, 700, 800, 900	$\pm 150 \times 10^{-6}/K$	1k $\Omega$ - 20k $\Omega$	1k $\Omega$ - 43k $\Omega$	J: $\pm 5\%$
1000, 1200, 1400	$\pm 15\%$	1k $\Omega$ - 13k $\Omega$	1k $\Omega$ - 27k $\Omega$	
1600, 1800		510 $\Omega$ - 4.7k $\Omega$	1k $\Omega$ - 20k $\Omega$	
2000, 2200, 2400	$\pm 10\%$	510 $\Omega$ - 4.7k $\Omega$	510 $\Omega$ - 9.1k $\Omega$	
2600, 2800, 3000		510 $\Omega$ - 3.0k $\Omega$	510 $\Omega$ - 6.2k $\Omega$	
3300, 3600, 3900		510 $\Omega$ - 3.0k $\Omega$	510 $\Omega$ - 6.2k $\Omega$	
4200		100 $\Omega$ - 1k $\Omega$	100 $\Omega$ - 2k $\Omega$	
4500		51 $\Omega$ - 510 $\Omega$	51 $\Omega$ - 510 $\Omega$	

T.C.R. Measuring Temperature:  $+25^{\circ}C \sim +75^{\circ}C$


Rated voltage =  $\sqrt{\text{Power Rating} \times \text{Resistance value}}$  or Max. working voltage, whichever is lower.

## environmental applications

### Derating Curve

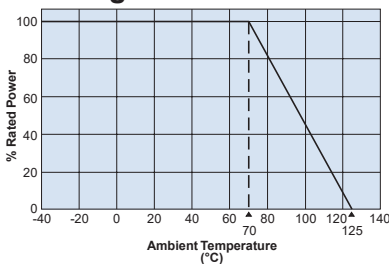

### Examples of Temperature Characteristics of Resistance

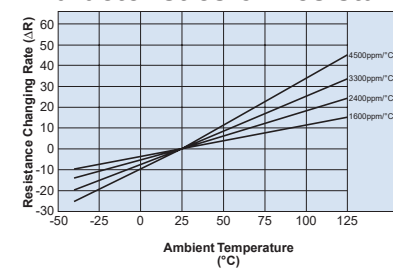

### Approximate Expression for Resistance-Temperature Characteristics

Values are not guaranteed but typical.

$R_T = R_{25} (C_0 + C_1 T + C_2 T^2)$   $R_T$ :  $T^{\circ}C$   $R_T$ : Resistance value at  $T^{\circ}C$   
 $R_{25}$ :  $25^{\circ}C$   $R_{25}$ : Resistance value at  $25^{\circ}C$   
 $T$ : ( $^{\circ}C$ )  $T$ : Ambient temperature ( $^{\circ}C$ )  
 $C_0, C_1, C_2$ :  $C_0, C_1, C_2$ : Constants

T.C.R. ( $\times 10^{-6}/K$ )	$C_0$	$C_1$	$C_2$
3000	0.9288	0.0028	$1.9983 \times 10^{-6}$
3300	0.9232	0.0030	$2.9980 \times 10^{-6}$
3600	0.9175	0.0032	$4.0000 \times 10^{-6}$
3900	0.9099	0.0035	$4.0064 \times 10^{-6}$
4200	0.9026	0.0038	$3.9964 \times 10^{-6}$
4500	0.8948	0.0041	$4.0064 \times 10^{-6}$

### Performance Characteristics

Parameter	Requirement $\Delta R \pm (\% + 0.05\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	$25^{\circ}C$
T.C.R.	Within specified T.C.R.	—	$+25^{\circ}C/+75^{\circ}C$
Overload (Short time)	$\pm 1.0\%$	$\pm 0.23\%$	Rated voltage x 2.5 or maximum overload volume for 5 seconds, whichever is lower
Resistance to Solder Heat	$\pm 1.0\%$	$\pm 0.1\%$	$260^{\circ}C \pm 5^{\circ}C$ , 10 seconds $\pm 1$ second
Rapid Change of Temperature	$\pm 1.0\%$	$\pm 0.1\%$	$-40^{\circ}C$ (30 minutes) / $+125^{\circ}C$ (30 minutes), 5 cycles
Moisture Resistance	$\pm 3.0\%$	$\pm 0.54\%$	$40^{\circ}C \pm 2^{\circ}C$ , 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at $70^{\circ}C$	$\pm 3.0\%$	$\pm 0.62\%$	$70^{\circ}C \pm 2^{\circ}C$ , 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle

Confirming resistance drift is recommended since this product has a tendency to have bigger resistance change than general flat chip over  $70^{\circ}C$ . Please pay attention not to be applied ESD, it may cause of resistance change.

### Actual Value (Out of Guarantee)

Test Items	Reference	Test Method
Low Temperature Exposure	$\pm 0.05\%$	$-40^{\circ}C$ , 45 minutes
High Temperature Exposure	$\pm 0.6\%$	$125^{\circ}C$ , 1000 hours
ESD	500V	Human Body Model, 100 pF 1.5 k $\Omega$

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

3/16/17




### features

- Twenty-five specifiable temperature characteristics
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.



### dimensions and construction

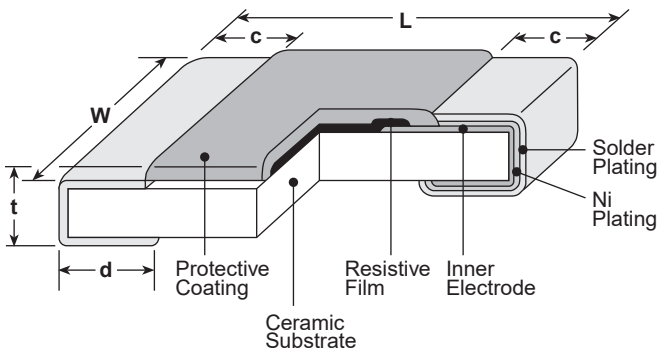

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-0.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.008 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-0.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)

### ordering information

<b>LA73</b>	<b>1J</b>	<b>T</b>	<b>TD</b>	<b>101</b>	<b>J</b>	<b>3300</b>
Type	Size Code	Termination Material	Packaging	Resistance Value	Tolerance	T.C.R.
	1J: 0603 2A: 0805 2B: 1206	T: Sn (Other termination styles available, contact factory for options)	TD: 7" paper (5,000 pieces/reel)	2 significant figures + 1 multiplier	J: ±5%	

For further information on packaging, please refer to Appendix A.

### applications and ratings


Part Designation	Thermal Dissipation Constant (mW/°C)	Rated Ambient Temp.	Max. Working Voltage (V)
LA731J	7.6	+70°C	25
LA732A	8.2		50
LA732B	9.0		50

Operating Temp. Range: -55°C - +125°C


Resistance Range E-12			T.C.R. Tolerance	T.C.R. (ppm/°C) Max.	Resistance Tolerance
LA731J	LA732A	LA732B			
1KΩ - 10KΩ	1KΩ - 10KΩ	1KΩ - 10KΩ	±200ppm/°C	1000	J: ±5%
680Ω - 6.8KΩ	680Ω - 6.8KΩ	680Ω - 6.8KΩ		1200	
470Ω - 4.7KΩ	470Ω - 4.7KΩ	470Ω - 4.7KΩ		1400	
470Ω - 3.9KΩ	470Ω - 3.9KΩ	470Ω - 3.9KΩ		1600	
330Ω - 2.7KΩ	330Ω - 2.7KΩ	330Ω - 2.7KΩ		1800	
330Ω - 2.7KΩ	330Ω - 2.7KΩ	330Ω - 2.7KΩ		2000	
220Ω - 1.8KΩ	220Ω - 1.8KΩ	220Ω - 1.8KΩ	±10%	2200	
220Ω - 1.2KΩ	220Ω - 1.2KΩ	220Ω - 1.2KΩ		2400	
100Ω - 1.2KΩ	100Ω - 1.2KΩ	100Ω - 1.2KΩ		2600	
100Ω - 390Ω	100Ω - 390Ω	100Ω - 390Ω		2800	
68Ω - 220Ω	68Ω - 220Ω	68Ω - 220Ω		3000	
33Ω - 120Ω	33Ω - 120Ω	33Ω - 120Ω		3300	
22Ω - 82Ω	22Ω - 82Ω	22Ω - 82Ω		3600	

### environmental applications

#### Derating Curve

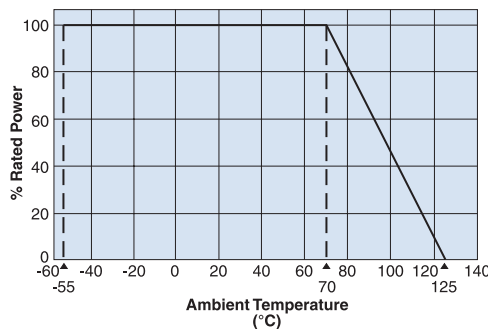

#### Temperature Characteristics

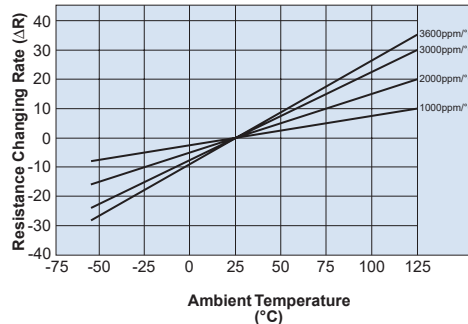

### Approximate Expression for Resistance-Temperature Characteristics

T.C.R. (x10 <sup>-6</sup> /K)	C <sub>0</sub>	C <sub>1</sub>	C <sub>2</sub>
3000	0.926	0.00294	1.1 x 10 <sup>-7</sup>
3300	0.918	0.00325	4.1 x 10 <sup>-7</sup>
3600	0.910	0.00359	1.7 x 10 <sup>-7</sup>

(Values are not guaranteed but typical)

$$R_T = R_{25} (C_0 + C_1 T + C_2 T^2)$$

R<sub>T</sub>: Resistance value at T°C

R<sub>25</sub>: Resistance value at 25°C

T: Ambient temperature (°C)

C<sub>0</sub>, C<sub>1</sub>, C<sub>2</sub>: Constants

### Performance Characteristics

Parameter	Requirement ΔR ±(% + 0.1%)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+75°C
Overload (Short time)	±1.0%	±0.5%	Rated voltage x 2.5 or maximum working volume x 2 for 5 seconds, whichever is lower
Resistance to Solder Heat	±1.0%	±0.5%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1.0%	±0.5%	-55°C (30 minutes)/ +125°C (30 minutes), 100 cycles
Moisture Resistance	±3.0%	±1.5%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±3.0%	±1.5%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle

Confirming resistance drift is recommended since this product has a tendency to have bigger resistance change than general flat chip over 70°C.

Please pay attention not to be applied ESD, it may cause of resistance change.

### Actual Value (Out of Guarantee)

Test Items	Reference	Test Method
High Temperature Exposure	±3.0%	125°C, 1000 hours
ESD	300V	Human model, 100 pF 1.5 kΩ


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/16/11

**features**

- LP series is thin-film thermal sensors and accomodates resistance tolerance  $\pm 1\%$  and high T.C.R.  $+5000 \times 10^{-6}/K$  with the standard products
- Suitable for control of temperatures for various industrial equipment
- Products meet EU RoHS requirements

**dimensions and construction**

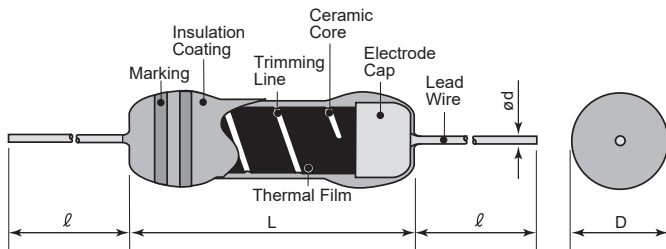

Type	Dimensions inches (mm)			
	L	D	d (Nom.)	I
LP 1/16	.138 <sup>+0.008</sup> <sub>-0.016</sub> (3.5 <sup>+0.2</sup> <sub>-0.4</sub> )	.067 $\pm$ .008 (1.7 $\pm$ 0.2)	.020 $\pm$ .002 (0.5 $\pm$ 0.05)	1.18 $\pm$ .118 (30 $\pm$ 3)
LP 1/8	.25 $\pm$ .031 (6.35 $\pm$ 0.8)	.090 $\pm$ .008 (2.3 $\pm$ 0.2)	.026 $\pm$ .002 (0.65 $\pm$ 0.05)	1.50 $\pm$ .118 (38 $\pm$ 3)

thermal sensors

**ordering information**

LP	1/8	C	T26	A	103	J	362
Product Code	Power Rating	Termination Surface Material	Taping	Packaging	Nominal Resistance	Resistance Tolerance	Symbol of T.C.R.
	1/16: 0.063W 1/8: 0.125W	C: SnCu	Nil: Bulk T26: 26mm Taping T52: 52mm Taping	Nil: Bulk A: AMMO	3 digits	F: $\pm 1\%$ G: $\pm 2\%$ J: $\pm 5\%$	3 digits 151: 150 362: 3600

**applications and ratings**

Type	Power Rating	Thermal Time Constant	Thermal Dissipation Constant*	Rated Ambient Temperature	Operating Temperature Range
LP1/16C	0.063W	8s	2.5mW/ $^{\circ}$ C	+70 $^{\circ}$ C	-55 $^{\circ}$ C-150 $^{\circ}$ C
LP1/8C	0.125W	14s	4.5mW/ $^{\circ}$ C		

\* Thermal time constant and dissipation constant are reference values, which are values of elements and vary with connecting or fixing methods.


T.C.R. ( $\times 10^{-6}/K$ )	T.C.R. Tolerance	$(\Omega)$ Resistance Range (E24 & 2.5, 5.0 $\times 10^n$ )					
		LP1/16			LP1/8		
		F: $\pm 1\%$	G: $\pm 2\%$	J: $\pm 5\%$	F: $\pm 1\%$	G: $\pm 2\%$	J: $\pm 5\%$
150, 250, 350 450	$\pm 50 \times 10^{-6}/K$	-	150-10k	150-10k	-	150-51k0	150-51k0
550, 650, 750, 850 950, 1000, 1200 1400, 1600, 1800 2000, 2200, 2400	$\pm 10\%$		150-30k	150-30k		150-100k	150-100k
2500 3000 3300 3600 4000, 4500, 5000	$\pm 5\%$	100-30k	10-30k	1-30k	100-100k	10-100k	1-100k
		100-10k	10-10k	1-10k	100-51k	10-51k	1-51k
					100-20k	10-20k	1-20k

T.C.R. Measuring Temperature: +25 $^{\circ}$ C/+65 $^{\circ}$ C. T.C.R. is guaranteed by random inspections.


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. 11/30/17

## environmental applications

### Derating Curve

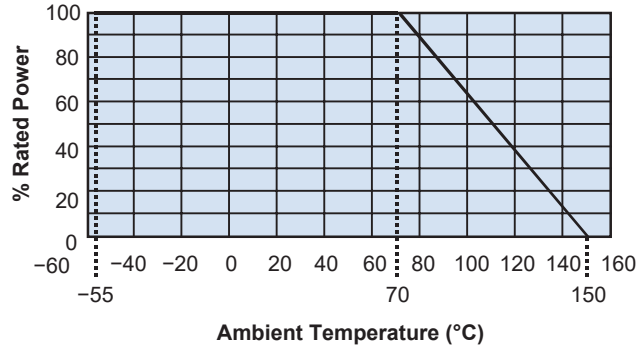

### Examples of Temp. Characteristics of Resistance

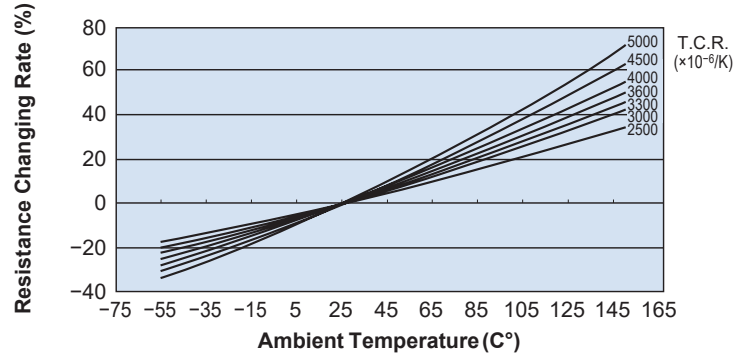

### Approximate Expression for Resistance-Temperature Characteristics

Values are not guaranteed but typical.

$$R_T = R_{25} (C_0 + C_1 T + C_2 T^2)$$

$R_T$ : T°C

$R_{25}$ : 25°C

T: (°C)

$C_0, C_1, C_2$ :

$R_T$ : Resistance value at T°C

$R_{25}$ : Resistance value at 25°C

T: Ambient temperature (°C)

$C_0, C_1, C_2$ : Constants

T.C.R. ( $\times 10^{-6}/K$ )	$C_0$	$C_1$	$C_2$
3000	0.931258	0.00265213	$3.90112 \times 10^{-6}$
3300	0.924355	0.00292569	$4.00516 \times 10^{-6}$
3600	0.916356	0.00323714	$4.34428 \times 10^{-6}$
4000	0.907039	0.00361006	$4.33457 \times 10^{-6}$
4500	0.897412	0.00395222	$6.05201 \times 10^{-6}$
5000	0.886014	0.00437224	$7.48809 \times 10^{-6}$

### Performance Characteristics


Test Items	Performance Requirements $\Delta R \pm$ (%+0.05 $\Omega$ )		Test Methods
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+65°C
Overload (Short time)	0.5%	0.2%	Rated voltage $\times$ 2.5 for 5 seconds
Resistance to Soldering Heat	0.5%	0.2%	350°C $\pm$ 10°C, 1 second
Rapid Change of Temperature	0.5%	0.2%	-55°C (30min.) /+25°C (10min.) /+150°C (30min.) /+25°C (10min.) 5 cycles
Moisture Resistance	2%	0.3%	40°C $\pm$ 2°C, 90%–95%RH, 1000h 1.5h ON/0.5h OFF cycle
Endurance at 70°C	2%	0.5%	70°C $\pm$ 3°C, 1000h 1.5h ON/0.5h OFF cycle



### features

- Twelve standard resistance values
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

### dimensions and construction

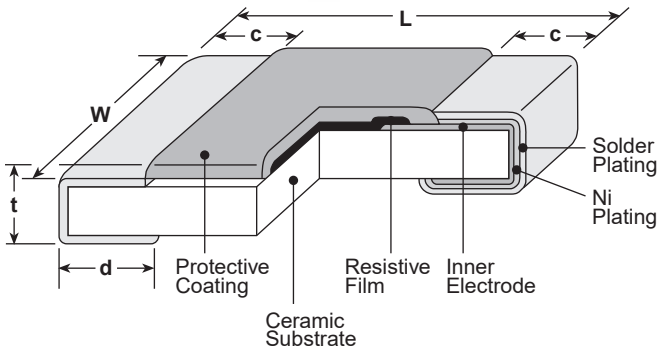

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.02±.004 (0.5±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-0.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02 <sup>+0.008</sup> <sub>-0.004</sub> (0.5 <sup>+0.2</sup> <sub>-0.1</sub> )
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.008 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-0.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)

### ordering information

<b>NT73</b>	<b>2A</b>	<b>T</b>	<b>TD</b>	<b>103</b>	<b>K</b>	<b>3800</b>	<b>J</b>
Type	Size Code	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance	B Constant Nominal	B Constant Tolerance
	1J: 0603 2A: 0805 2B: 1206	T: Sn (Other termination styles may be available, please contact factory for options)	TD: 7" paper tape (5,000 pieces/reel)	2 significant figures + 1 multiplier	J: ±5% K: ±10% L: ±15%	3200 3500 3700 3800 3950 4100	H: ±3% J: ±5% K: ±10%

### applications and ratings

Part Designation	Resistance @ 25°C	Resistance Tolerance	B Constant @ 25°C/75°C	B Constant Tolerance	Power Rating (mW)	Operating Temperature Range
NT731J	6.8kΩ	J: ±5% K: ±10%	3500K	±10%	5	-55°C to +125°C
	10kΩ			±5%		
	15kΩ					
	10kΩ		3700K	±3%		
	20kΩ			±5%		
	22kΩ					
	30kΩ		3800K	±5%		
	33kΩ					
	47kΩ					
	68kΩ		4100K	±3%		
	100kΩ					
	47kΩ					
NT732A	1kΩ	K: ±10% L: ±15%	3200K	±10%	5	
	2kΩ					
	2.2kΩ					
	2.4kΩ					
	3.3kΩ	J: ±5%; K: ±10% L: ±15%	3500K	±5%		
	4.7kΩ					
	5kΩ					
	5kΩ					

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/28/17


**applications and ratings (continued)**

Part Designation	Resistance @ 25°C	Resistance Tolerance	B Constant @ 25°C/75°C	B Constant Tolerance	Power Rating (mW)	Operating Temperature Range			
NT732A	6.8kΩ	K: ±10%; L: ±15%	3800K	±10%	5	-55°C to +125°C			
	10kΩ		3500K						
	15kΩ		J: ±5% K: ±10% L: ±15%	3800K			±5%		
	10kΩ								
	20kΩ								
	22kΩ								
	30kΩ								
	33kΩ								
	47kΩ								
	68kΩ								
	100kΩ								
	150kΩ								
	50kΩ							4100K	±3%
	10kΩ								
	15kΩ								
	20kΩ								
	22kΩ								
30kΩ									
33kΩ									
47kΩ	3200K	±10%							
68kΩ									
100kΩ									
150kΩ									
1kΩ			3500K	±10%					
2.2kΩ									
3.3kΩ									
4.7kΩ									
6.8kΩ	J: ±5% K: ±10% L: ±15%	3800K			±5%				
10kΩ									
22kΩ									
33kΩ									
47kΩ									
68kΩ									
100kΩ									

Thermal dissipation constant - in the atmosphere - (reference) 1J: 2.0mW/°C, 2A: 2.8mW/°C, 2B: 3.0mW/°C

**environmental applications**

**Temperature Characteristics**

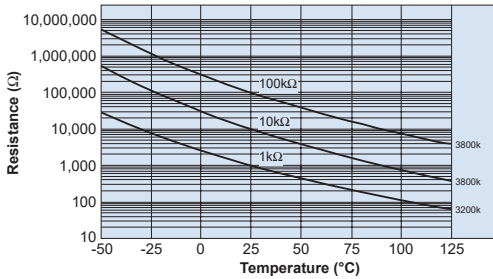

**RT/R25 Ratio vs. B Constant**

Resistance	1k	5k	10k	100k	10k	Resistance	1k	5k	10k	100k	10k
B Constant	3200K	3500K	3700K	3800K	4100K	B Constant	3200K	3500K	3700K	3800K	4100K
Temp. (°C)	k	k	k	k	k	Temp. (°C)	k	k	k	k	k
-55	38770	273.24	638.23	7692.5	1203.1	40	604.07	2.8809	5.5500	54.959	5.1999
-50	28840	197.67	465.81	5414.6	820.76	45	515.10	2.4202	4.6100	45.484	4.2349
-45	21706	144.85	343.25	3864.5	568.09	50	441.00	2.0421	3.8500	37.823	3.4692
-40	16517	107.43	255.22	2794.3	398.57	55	379.00	1.7302	3.2300	31.594	2.8585
-35	12696	80.577	191.37	2045.2	283.20	60	326.90	1.4718	2.7200	26.506	2.3692
-30	9857.0	61.077	144.64	1514.1	203.64	65	282.95	1.2568	2.3100	22.330	1.9721
-25	7721.2	46.759	110.13	1133.0	148.07	70	245.72	1.0771	1.9700	18.886	1.6504
-20	6100.5	36.137	83.710	856.49	108.37	75	214.08	0.92637	1.6800	16.035	1.3877
-15	4858.7	28.173	64.190	653.63	80.182	80	187.08	0.79937	1.4500	13.663	1.1724
-10	3899.0	22.147	49.640	503.31	59.943	85	163.96	0.69199	1.2500	11.682	0.99491
-5	3151.3	17.546	38.680	390.86	45.252	90	144.11	0.60087	1.0800	10.022	0.84926
0	2564.2	14.004	30.370	305.97	34.478	95	127.00	0.52329	0.94000	8.6257	0.72802
5	2099.9	11.256	23.970	241.34	26.473	100	112.21	0.45701	0.82000	7.4466	0.62662
10	1730.0	9.1063	19.070	191.73	20.506	105	99.377	0.40016	0.72000	6.4466	0.54156
15	1433.5	7.4135	15.270	153.36	16.016	110	88.224	0.35129	0.63000	5.5968	0.46982
20	1194.2	6.0712	12.320	123.46	12.608	115	78.501	0.30915	0.56000	4.8721	0.40906
25	1000.0	5.0000	10.000	100.00	10.000	120	70.004	0.27272	0.49000	4.2523	0.35741
30	841.48	4.1398	8.1700	81.470	7.9880	125	62.558	0.24114	0.44000	3.7207	0.31332
35	711.39	3.4451	6.7100	66.739	6.4242						

**Performance Characteristics**

Parameter	Requirement Δ R ±(%+0.05%)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
B Constant	Within specified tolerance	—	+25°C/+75°C
Resistance to Solder Heat	Other: ±1%, ±2%:1kΩ	Other: ±0.5%, ±1%:1kΩ	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±3.0%	±1.3%	-55°C (30 minutes), +125°C (30 minutes), 50 cycles
Moisture Resistance	±3.0%	±1.1%	40°C ± 2°C, 90 - 95% RH, 1000 hours
Load Life	±3.0%	±2.5%	80°C ± 3°C, DC5mW, 1000 hours
High Temperature Exposure	±3.0%	±1.6%	80°C, 1000 hours

Confirming resistance drift is recommended since this product has a tendency to have bigger resistance change than general flat chip over 80°C. Please pay attention not to be applied ESD, it may cause of resistance change.

**Actual Value (Out of Guarantee)**

Test Items	Reference	Test Method
High Temperature Exposure	±7.0%	125°C, 1000 hours
ESD	500V	Human model, 100 pF 1.5 kΩ




## Precautions for the Inductors


Refer to the precautions of common matters for all products in the beginning of this catalog.

### Inductors in General

- Characteristics such as the inductance, Q value etc. are frequency dependent.
- The stress from resin coating and molding can result in change of inductance.
- Since the inductors use ceramic materials, chipping and crack can occur. Please be careful when handling. Excessive vibration and impact could destroy the parts.
- Keep magnetic tweezers and other magnets away from the inductors to avoid change of inductance caused by magnetization. Do not press the wire wound part of the chip inductor with sharp objects.
- The inductance could decrease according to magnetic saturation when the inductor is used exceeding the allowable current. There is also a possibility of disconnection and short-circuit or emitting smoke and ignition caused by the heat generation of the inductor.
- There is a risk of disconnection when excessive current (inrush current) is applied. Change of the characteristics may occur by the magnetization of the core when excessive current is applied to a DC circuit.
- When the parts are used at high-frequency, the heat generation will be larger and the part temperature will be higher compared with DC or low-frequency. This is caused by increasing iron loss and copper loss. Please be careful not to exceed the operating temperature rise by high frequency. Ex. LPC4045

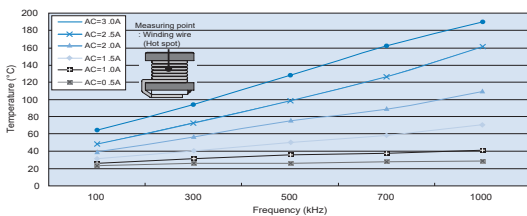

- The electrical characteristics change from the variation of frequency of the parts. When the part is used above the frequency band of the SRF (self-resonant frequency), it will function as a capacitor. Please do not use the parts above the SRF.

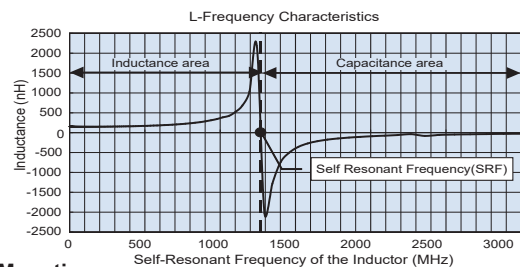

### Mounting

- Some inductors have magnetic polarities.
- The inductance and Q values of a non-magnetically-shielded inductor could change from magnetic coupling affected by other components, chassis, patterns, etc. When mounting in high density, check the characteristic in advance with the actual equipment. Additionally, take care of the positioning of the components since closely mounted inductors may cause magnetic coupling. Do not place large magnetic materials like audio speakers, etc. near the inductors.
- Do not expose the inductors to the heat radiation from other high temperature parts.

### Reference

- For basic precautions, please refer to the Technical report of JEITA RCR-2501 Safety application guide for inductors for use in electronic equipment.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/05/18

## Terms and Definitions

### Nominal Inductance

- Inductance that the inductor is designed to have and generally indicated on the body.

### Q Value (Quality factor)

- A coefficient that shows the quality of the inductors. It is calculated from the following formula shown below.

$$Q = \frac{\omega L}{R}$$

$\omega$  = Angular Frequency ( $\omega = 2\pi F$ )  
 $L$  = Inductance  
 $R$  = Resistance

### Self-Resonant Frequency


- Frequency that resonance occurs by the distribution capacity and inductance of the inductor.

### DC Resistance Value

- Resistance value at DC.

### Allowable DC Current

- Upper limit of the current which is set to assure the safe use of the inductor.
- It is defined as the smaller DC current value of either the DC superposition or the surface temperature rise characteristics.
- DC superposition characteristic is a phenomenon which occurs when the inductors, made with magnetic materials such as ferrite, have a large DC current applied. When this occurs, the inductance drops because of the magnetic saturation.
- The plot below shows the relationship between the DC superposition and the surface temperature rise..

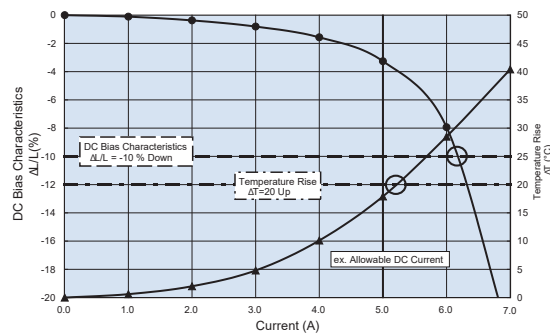

### Iron Loss

- Electrical energy that is lost when the wire wound magnetic material is magnetized by the applied AC. It is calculated by the sum of hysteretic loss and eddy-current loss.

### Copper Loss


- Energy that is transformed into Joule heat by the resistance of the wound wire. The Copper loss increases in the high frequency band from the skin effect.

### features

- Low DC resistance and high allowable DC current
- Low profile style 0.027 inches (0.7mm) typical
- Suitable for reflow soldering
- Products with lead-free terminations meet EU RoHS requirements


### dimensions and construction

0402, 0403

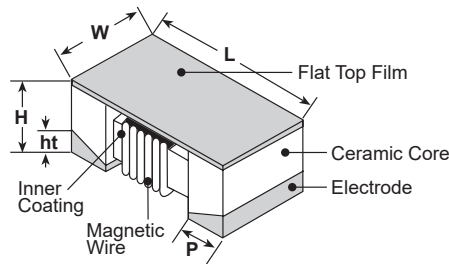


Size Code	Dimensions inches (mm)				
	L	W	H	Ht	P
0402	.039±.004 (1.0±0.1)	.020±.004 (0.5±0.1)	.022±.004 (0.55±0.1)	.006±.004 (0.15±0.1)	.008±.004 (0.2±0.1)
0603	.063±.004 (1.6±0.1)	.041±.008 (1.05±0.2)	.028±.004 (0.7±0.1)	.008±.006 (0.2±0.15)	.015±.004 (0.37±0.1)


0603

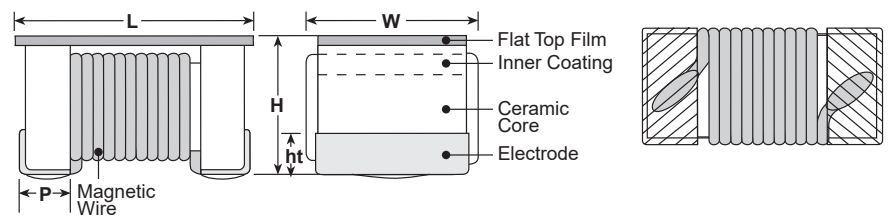

#### L-Frequency Characteristics - 0402

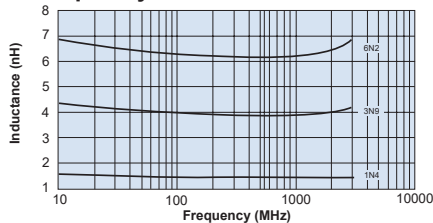


#### L-Frequency Characteristics - 0603

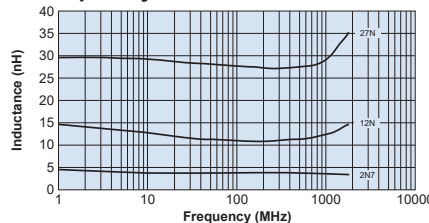


Test equipment:  
Agilent 4991 A Impedance analyzer (KQC0402)  
Agilent 4291 A Impedance analyzer (KQC0603)

#### Q-Frequency Characteristics - 0402

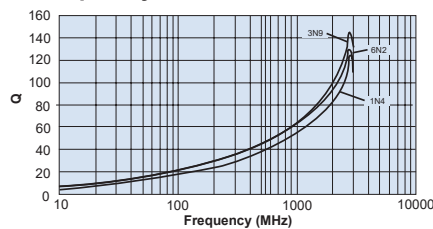

#### Q-Frequency Characteristics - 0603

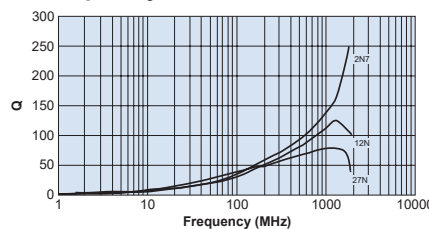

### ordering information

<b>KQC</b>	<b>0603</b>	<b>T</b>	<b>TE</b>	<b>12N</b>	<b>J</b>
Type	Size Code	Termination Material	Packaging	Nominal Inductance	Tolerance
	0402 0603	T: Sn	TP: 2mm pitch paper (0402: 10,000 pieces/reel) TE: 4mm pitch embossed plastic (0603: 2,000 pieces/reel) TD: 4mm pitch paper (0402: 2,000 pieces/reel)	3 digits 10N: 10nH 1N2: 1.2nH	B: ±0.1nH C: ±0.2nH G: ±2% J: ±5%

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/30/17

## applications and ratings

Part Designation	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (GHz)	DC Resistance Maximum ( $\Omega$ )	Allowable DC Current Maximum (A)		
KQC0402T**1N4*	1.4	250	B: $\pm 0.1$ nH	25	250	11.0	0.019	1.40		
KQC0402T**1N5*	1.5					10.0				
KQC0402T**1N6*	1.6					9.6				
KQC0402T**1N7*	1.7					8.5				
KQC0402T**2N5*	2.5		C: $\pm 0.2$ nH	27		8.0	0.028	1.20		
KQC0402T**2N7*	2.7					7.2				
KQC0402T**3N0*	3.0					6.6				
KQC0402T**3N3*	3.3					7.3				
KQC0402T**3N9*	3.9					7.0				
KQC0402T**4N3*	4.3					30			6.6	0.036
KQC0402T**4N7*	4.7		5.6							
KQC0402T**6N2*	6.2		0.045	0.90						
KQC0603TTE1N2*	1.2		250	J: $\pm 5\%$			35	250	18	
KQC0603TTE2N7*	2.7					6.0			0.025	2.00
KQC0603TTE4N7*	4.7	5.5			0.035	1.80				
KQC0603TTE5N6*	5.6									
KQC0603TTE7N5*	7.5									
KQC0603TTE8N2*	8.2				4.0	0.045			1.50	
KQC0603TTE10N*	10	3.0			0.065	1.25				
KQC0603TTE12N*	12				0.055	1.40				
KQC0603TTE15N*	15				0.065	1.25				
KQC0603TTE18N*	18				2.5	0.090			1.20	
KQC0603TTE22N*	22	0.100				1.10				
KQC0603TTE27N*	27	0.120				1.00				

\* Add tolerance character (B, C, J, G)      \*\* Add packaging character (TD, TP)

Operating Temperature Range:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

The operating temperature range of the coil (ambient temperature + self heating) must remain at  $+125^{\circ}\text{C}$  or less

## environmental applications

### Performance Characteristics

Parameter	Requirements Maximum Limit	$\Delta L/L$ $\Delta Q/Q$ Typical	Test Method
Resistance to Soldering Heat	No significant abnormality in appearance $\Delta L/L: \pm 5\%$ , $\Delta Q/Q: \pm 10\%$	$\Delta L/L: \pm 1.2\%$ $\Delta Q/Q: \pm 2.7\%$	$260^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , 10s $\pm$ 1s
Rapid Change of Temperature	No significant abnormality in appearance $\Delta L/L: \pm 5\%$ , $\Delta Q/Q: \pm 10\%$	$\Delta L/L: \pm 1.9\%$ $\Delta Q/Q: \pm 3.9\%$	$-40^{\circ}\text{C}$ (30min.) / $+125^{\circ}\text{C}$ (30min.) 100 cycles
Low Temperature Exposure	No significant abnormality in appearance $\Delta L/L: \pm 5\%$ , $\Delta Q/Q: \pm 10\%$	$\Delta L/L: \pm 2.0\%$ $\Delta Q/Q: \pm 4.1\%$	$-40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , 1000h
High Temperature Exposure	No significant abnormality in appearance $\Delta L/L: \pm 5\%$ , $\Delta Q/Q: \pm 10\%$	$\Delta L/L: \pm 1.8\%$ $\Delta Q/Q: \pm 3.3\%$	$125^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , 1000h
Moisture Exposure	No significant abnormality in appearance $\Delta L/L: \pm 5\%$ , $\Delta Q/Q: \pm 10\%$	$\Delta L/L: \pm 1.7\%$ $\Delta Q/Q: \pm 3.3\%$	$40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , 90%~95%RH, 1000h
Resistance to Solvent	No damage and marking shall remain legible	—	Accordance with MIL-STD 202F Method 215

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


11/30/17

### features


- Surface mount
- Operating temperature: -40°C ~ +125°C
- Flat top suitable for high speed pick-and-place components
- Excellent high frequency applications
- High Q factors and self-resonant frequency values
- Products with lead-free terminations meet EU RoHS requirements
- AEC-Q200 Qualified

### dimensions and construction

0402

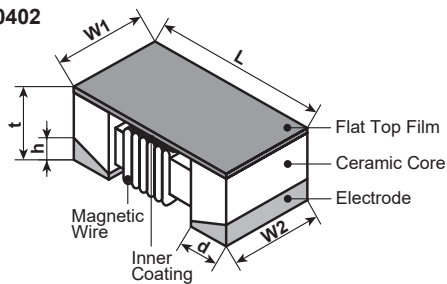

0603, 0805, 1008

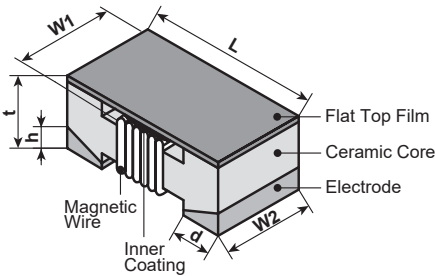

Size Code	Dimensions inches (mm)					
	L	W1	W2	t	h	d
KQT0402	.039±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.02±.004 (0.5±0.1)	.022±.004 (0.55±0.1)	.006±.004 (0.15±0.1)	.01±.004 (0.25±0.1)
KQ0603	.063±.004 (1.6±0.1)	.039±.004 (1.0±0.1)	.033±.004 (0.85±0.1)	.035±.004 (0.9±0.1)	.01±.006 (0.25±0.15)	.014±.004 (0.35±0.1)
KQ0805	.079±.008 (2.0±0.2)	.059±.008 (1.5±0.2) (3.3nH-390nH)	.053±.004 (1.35±0.1)	.051±.008 (1.3±0.2)	.016±.006 (0.40±0.15)	.018±.004 (0.45±0.1)
		.063±.008 (1.6±0.2) (470nH-820nH)				
KQ1008	.098±.008 (2.5±0.2)	.087±.008 (2.2±0.2)	.079±.004 (2.0±0.1)	.071 <sup>+0.008</sup> <sub>-0</sub> (1.8 <sup>+0.2</sup> <sub>-0</sub> )	.018±.006 (0.45±0.15)	.018±.004 (0.45±0.1)

### ordering information

<b>KQ</b>	<b>1008</b>	<b>T</b>	<b>TE</b>	<b>10N</b>	<b>J</b>
<b>Type</b>	<b>Size Code</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Inductance</b>	<b>Tolerance</b>
KQ KQT	0402 0603 0805 1008	T: Sn	TP: 2mm pitch paper (0402: 10,000 pieces/reel) TD: 7" paper tape (0402: 2,000 pieces/reel) TE: 7" embossed plastic (0603, 0805, 1008: 2,000 pieces/reel)	3 digits: 10N: 10nH R10: 0.1µH 1R0: 1.0µH	B: ±0.1nH C: ±0.2nH G: ±2% H: ±3% J: ±5% K: ±10% M: ±20%

For further information on packaging, please refer to Appendix A.

applications and ratings

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency (MHz)	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum ( $\Omega$ )	Allowable DC Current Maximum (mA)
KQT0402T**1N0*	—	1.0	250	B: $\pm 0.1$ nH C: $\pm 0.2$ nH	16	250	11000	0.045	1360
KQT0402T**1N9*		1.9					9600	0.070	1040
KQT0402T**2N0*		2.0			8000				
KQT0402T**2N2*		2.2					7200	0.120	700
KQT0402T**2N4*		2.4			6000				
KQT0402T**2N7*		2.7					5800	0.083	760
KQT0402T**3N3*		3.3			4800				
KQT0402T**3N6*		3.6					5800	0.104	680
KQT0402T**3N9*		3.9			4400				
KQT0402T**4N3*		4.3					4200	0.104	680
KQT0402T**4N7*		4.7		4000	0.150	650			
KQT0402T**5N1*		5.1					3900	0.195	480
KQT0402T**5N6*		5.6		3680	0.120	640			
KQT0402T**6N2*		6.2					3600	0.180	560
KQT0402T**6N8*		6.8		3280	0.172	500			
KQT0402T**7N5*		7.5					3100	0.200	480
KQT0402T**8N2*		8.2		2800	0.230	450			
KQT0402T**8N7*		8.7					2800	0.323	400
KQT0402T**9N0*		9.0		2720	0.214	400			
KQT0402T**9N5*		9.5					2700	0.322	400
KQT0402T**10N*		10		2480	0.298	400			
KQT0402T**11N*		11					2400	0.354	400
KQT0402T**12N*		12		2400	0.393	340			
KQT0402T**13N*		13					2320	0.560	320
KQT0402T**14N*		15		2300	0.550	300			
KQT0402T**16N*		16					2240	0.620	320
KQT0402T**18N*		18		2200	0.810	300			
KQT0402T**19N*		19					2100	0.830	150
KQT0402T**20N*		20		2100	0.835	240			
KQT0402T**22N*		22					2800	1.170	200
KQT0402T**23N*		23		2000	1.120	140			
KQT0402T**24N*		24					1800	1.810	140
KQT0402T**27N*		27		1600	2.090	130			
KQT0402T**30N*		30					1500	2.320	120
KQT0402T**33N*		33							
KQT0402T**34N*		34							
KQT0402T**36N*		36							
KQT0402T**39N*		39							
KQT0402T**40N*		40							
KQT0402T**43N*		43							
KQT0402T**47N*	47								
KQT0402T**51N*	51								
KQT0402T**56N*	56								
KQT0402T**68N*	68								
KQT0402T**82N*	82								
KQT0402T**R10*	100								
KQT0402T**R12*	120								

\* Add tolerance character (B, C, G, H, J, K, M)

\*\* Add packaging code

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency (MHz)	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQ0603TTE1N6*	C	1.6	250	J: ±5% K: ±10%	24	250	12500	0.03	700
KQ0603TTE1N8*	0	1.8			16			0.045	
KQ0603TTE3N3*	X	3.3			22			0.055	
KQ0603TTE3N6*	E	3.6						6900	
KQ0603TTE3N9*	1	3.9					5900	0.08	
KQ0603TTE4N3*	F	4.3					20	0.063	
KQ0603TTE4N7*	G	4.7						5800	
KQ0603TTE5N1*	Y	5.1					27	0.115	
KQ0603TTE6N8*	2	6.8			4800			0.11	
KQ0603TTE7N5*	H	7.5			28		0.106		
KQ0603TTE8N2*	A	8.2		4600			0.12		
KQ0603TTE8N7*	J	8.7		31	0.109				
KQ0603TTE9N5*	B	9.5			4800		0.125		
KQ0603TTE10N*	3	10		33	0.13				
KQ0603TTE11N*	K	11			4000		0.086		
KQ0603TTE12N*	4	12		4000			0.13		
KQ0603TTE15N*	5	15		35	0.17				
KQ0603TTE16N*	L	16			3300		0.104		
KQ0603TTE18N*	6	18		35	3100		0.17		
KQ0603TTE22N*	7	22		38	3000		0.19		
KQ0603TTE23N*	S	23	37	2700	0.15				
KQ0603TTE24N*	M	24		2650	0.135				
KQ0603TTE27N*	8	27	40	2800	0.22	600			
KQ0603TTE30N*	N	30	37	2250	0.144				
KQ0603TTE33N*	9	33		40	2300		0.22		
KQ0603TTE36N*	P	36	38	2080	0.25				
KQ0603TTE39N*	0	39		40					
KQ0603TTE43N*	Q	43	39	2200					
KQ0603TTE47N*	1	47	38	2000	0.28				
KQ0603TTE51N*	T	51		200	1900		0.30		
KQ0603TTE56N*	2	56			37		0.31		
KQ0603TTE68N*	3	68	34	1700	0.34		400		
KQ0603TTE72N*	4	72			0.49				
KQ0603TTE82N*	5	82		150	1400	0.54			
KQ0603TTER10*	6	100			1350	0.58			
KQ0603TTER11*	7	110	32	1300	0.61	300			
KQ0603TTER12*	8	120		1400	0.65				
KQ0603TTER15*	9	150	1300	1400	1.4	160			
KQ0603TTER18*	0	180		25	1300	2.2	140		
KQ0603TTER20*	U	200	1200		100	2.3	130		
KQ0603TTER21*	V	210		2.5		120			
KQ0603TTER22*	1	220	1000	24	2.4				
KQ0603TTER25*	W	250			900	2.3	170		
KQ0603TTER27*	2	270	840	100	2.3	110			
KQ0603TTER30*	X	300			800	3.17	100		
KQ0603TTER33*	3	330	700	50	3.0	80			
KQ0603TTER39*	4	390			640	1.21	190		
KQ0603TTER47*	5	470	30	50	610	1.26	170		
KQ0603TTER51*	V	510			560	2.09	130		
KQ0603TTER56*	6	560	50	50	590	1.89	150		
KQ0603TTER62*	W	620			590	1.89	150		

\* Add tolerance character (B, C, G, H, J, K, M)



applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency (MHz)	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)		
KQ0603TTER68*	7	680	50	J: ±5% K: ±10%	30	50	540	1.97	140		
KQ0603TTER72*	C	720					530	2.04	130		
KQ0603TTER75*	X	750					490	3.09	110		
KQ0603TTER82*	8	820					480	2.95	120		
KQ0603TTER91*	Y	910					440	5.13	90		
KQ0603TTE1R0*	9	1000					400	5.45	80		
KQ0603TTE1R2*	0	1200									
KQ0805TTE3N3*	0	3.3	250	J: ±5% K: ±10%	50	1500	6000	0.08	600		
KQ0805TTE6N8*	1	6.8				1000	5500	0.11			
KQ0805TTE8N2*	2	8.2				4700	0.12				
KQ0805TTE12N*	3	12				4000	0.15				
KQ0805TTE15N*	4	15				3400	0.17				
KQ0805TTE18N*	5	18				3300	0.20				
KQ0805TTE20N*	Y	20				55	500	2600	0.22	500	
KQ0805TTE22N*	6	22						2500	0.25		
KQ0805TTE27N*	7	27						2050	0.27		
KQ0805TTE33N*	8	33						2000	0.29		
KQ0805TTE39N*	9	39	60	500	2000	0.29					
KQ0805TTE43N*	4	43			1650	0.34					
KQ0805TTE47N*	0	47			1550	0.34					
KQ0805TTE56N*	1	56			1450	0.38					
KQ0805TTE68N*	2	68	150	G: ±2% J: ±5% K: ±10%	65	1300	0.42	400			
KQ0805TTE82N*	3	82				1200	0.46				
KQ0805TTER10*	4	100				1100	0.51				
KQ0805TTER12*	5	120				920	0.56				
KQ0805TTER15*	6	150				50	250		870	0.64	
KQ0805TTER16*	H	160							850	0.70	
KQ0805TTER17*	J	170									
KQ0805TTER18*	7	180									
KQ0805TTER19*	D	190				100	48				650
KQ0805TTER20*	E	200							600	1.4	310
KQ0805TTER21*	F	210	560	1.5	290						
KQ0805TTER22*	8	220	375	1.76	250						
KQ0805TTER23*	K	230	340	1.9	230						
KQ0805TTER24*	L	240	188	2.2	190						
KQ0805TTER25*	G	250	200	2.3	180						
KQ0805TTER27*	9	270	215	2.35	180						
KQ0805TTER33*	0	330									
KQ0805TTER39*	1	390	50	J: ±5% K: ±10%	33	100	4100	0.08	1000		
KQ0805TTER47*	2	470					3300	0.09			
KQ0805TTER56*	3	560					3000	0.10			
KQ0805TTER68*	4	680					2500	0.11			
KQ0805TTER72*	A	720					2400	0.12			
KQ0805TTER82*	5	820	55	350	1600	0.13					
KQ1008TTE10N*	10N	10			60	350	1600	0.14			
KQ1008TTE12N*	12N	12									
KQ1008TTE15N*	15N	15									
KQ1008TTE18N*	18N	18	50	J: ±5% K: ±10% M: ±20%	50	500	4100	0.08		1000	
KQ1008TTE22N*	22N	22					3300	0.09			
KQ1008TTE27N*	27N	27					3000	0.10			
KQ1008TTE33N*	33N	33					2500	0.11			
			50	J: ±5% K: ±10%	23	50	2400	0.12			
							1600	0.13			
							1600	0.14			

Inductors

\* Add tolerance character (C, G, H, J, K, M)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/30/17

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency (MHz)	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQ1008TTE39N*	39N	39	50	J: ±5%, K: ±10% M: ±20%	60	350	1500	0.15	1000
KQ1008TTE47N*	47N	47			65		1300	0.16	
KQ1008TTE56N*	56N	56			60		1000	0.18	
KQ1008TTE68N*	68N	68			60		950	0.20	
KQ1008TTE82N*	82N	82			60		1000	0.22	
KQ1008TTER10*	R10	100	25	G: ±2% J: ±5% K: ±10%	45	100	850	0.56	650
KQ1008TTER12*	R12	120					950	0.63	
KQ1008TTER15*	R15	150					850	0.70	
KQ1008TTER18*	R18	180					750	0.77	580
KQ1008TTER22*	R22	220					700	0.84	
KQ1008TTER27*	R27	270					600	0.91	500
KQ1008TTER33*	R33	330					570	1.05	
KQ1008TTER39*	R39	390					500	1.12	470
KQ1008TTER47*	R47	470					450	1.19	
KQ1008TTER56*	R56	560					415	1.33	400
KQ1008TTER62*	R62	620					375	1.40	
KQ1008TTER68*	R68	680					360	1.47	400
KQ1008TTER75*	R75	750					350	1.54	
KQ1008TTER82*	R82	820					350	1.61	400
KQ1008TTER91*	R91	910					320	1.68	
KQ1008TTE1R0*	1R0	1000	7.9		35	50	320	1.68	380
KQ1008TTE1R2*	1R2	1200					290	1.75	
KQ1008TTE1R5*	1R5	1500					250	1.6	
KQ1008TTE1R8*	1R8	1800					200	1.7	300
KQ1008TTE2R2*	2R2	2200					160	1.9	
KQ1008TTE2R7*	2R7	2700	25		22	7.9	140	2.2	250
KQ1008TTE3R3*	3R3	3300					110	2.3	
KQ1008TTE3R9*	3R9	3900					100	2.7	230
KQ1008TTE4R7*	4R7	4700					90	2.8	
KQ1008TTE5R6*	5R6	5600					80	3.1	210
KQ1008TTE6R8*	6R8	6800	70	2.5					
KQ1008TTE8R2*	8R2	8200	15		15	7.9	80	2.8	200
KQ1008TTE100*	100	10000					65	3.0	
							60	3.4	150



\* Add tolerance character (C, G, H, J, K, M)

Operating Temperature Range: -40°C ~ +125°C

The operating temperature range of the coil (ambient temperature + self heating) must remain at +125°C or less

environmental applications

L-Frequency Characteristics

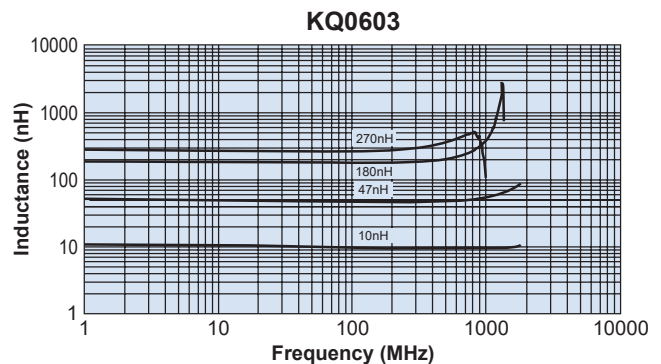
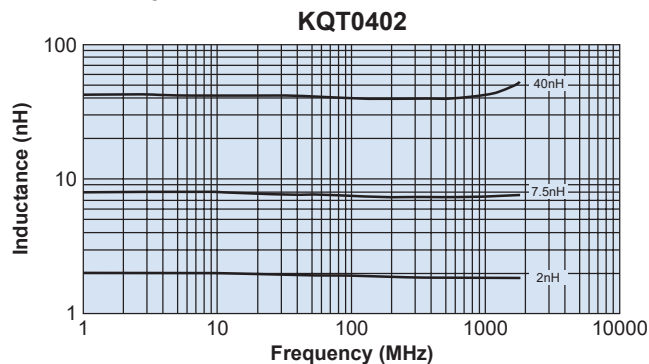


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.





12/19/17

**environmental applications** (continued)

**L-Frequency Characteristics**

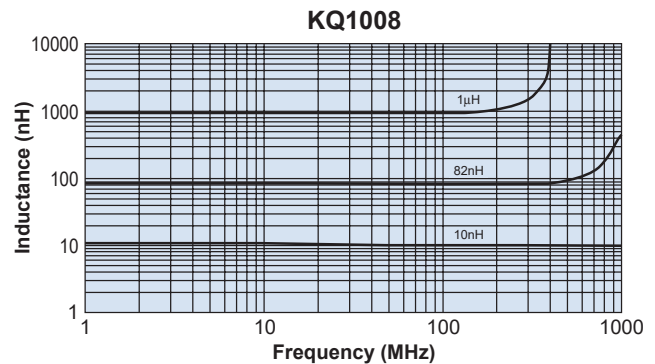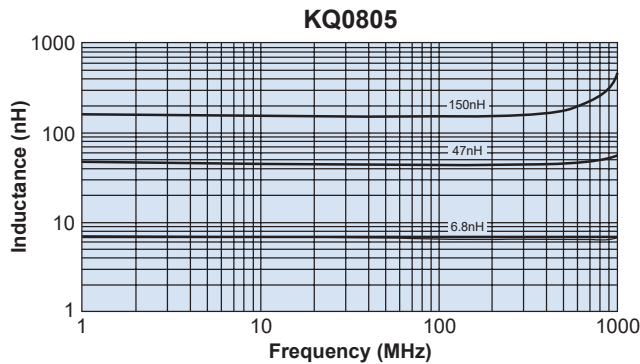

**Q-Frequency Characteristics**

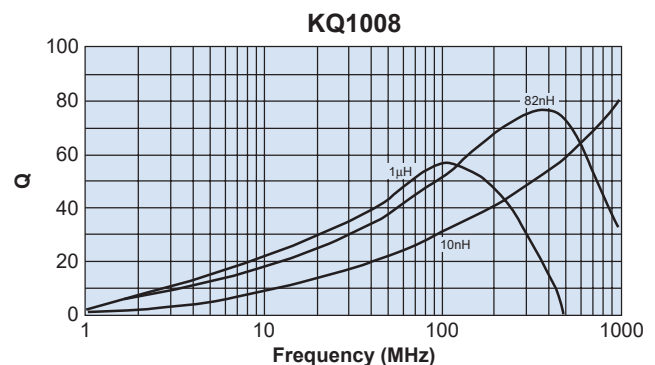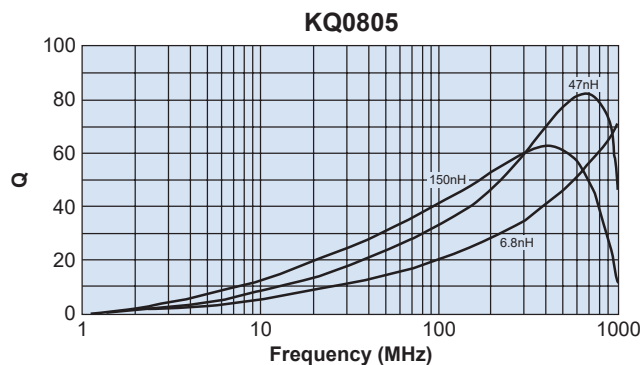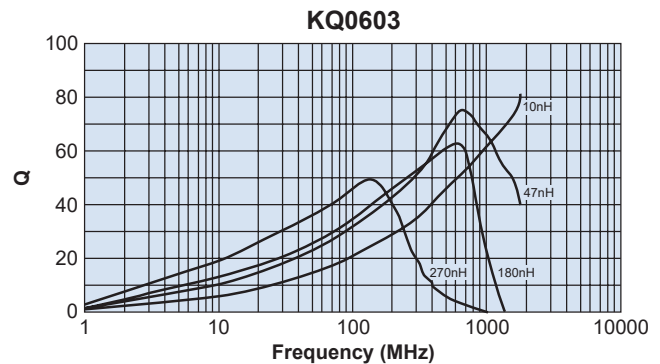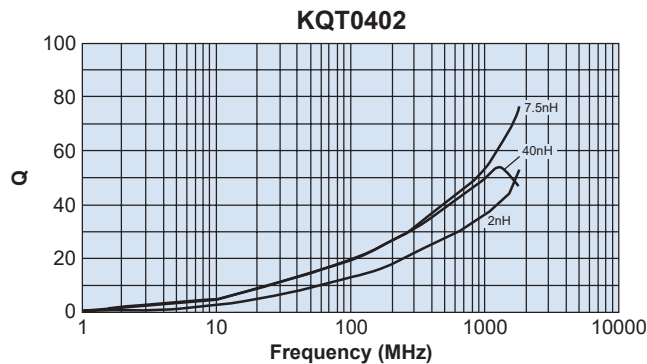

Test equipment: HP4291A impedance analyzer

**Performance Characteristics**

Parameter	Requirements Maximum Limit	Δ L/L	Δ Q/Q	Test Method
		Typical	Typical	
Resistance to Soldering Heat	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±2.7%	Δ Q/Q: ±6.6%	260°C ± 5°C, 10s ± 1s
Rapid Change of Temperature	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±2.1%	Δ Q/Q: ±5.3%	-40°C (30min.)/ +125°C (30min.) 100 cycles
Low Temperature Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±1.8%	Δ Q/Q: ±2.8%	-40°C ± 2°C, 1000h
High Temperature Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±1.8%	Δ Q/Q: ±5.3%	125°C ± 2°C, 1000h
Moisture Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±0.9%	Δ Q/Q: ±6.9%	40°C ± 2°C, 90%~95%RH, 1000h
Resistance to Solvent	No damage and marking shall remain legible	—	—	Accordance with MIL-STD 202F Method 215

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/30/17


## features

- Low DC resistance and high allowable current are realized by the original construction and wiring technology
- Automatic surface mounting is applicable
- Excellent solderability and endurance environment
- Suitable for reflow soldering
- Products meet EU RoHS requirements
- AEC-Q200 Qualified




## dimensions and construction

LPC4045

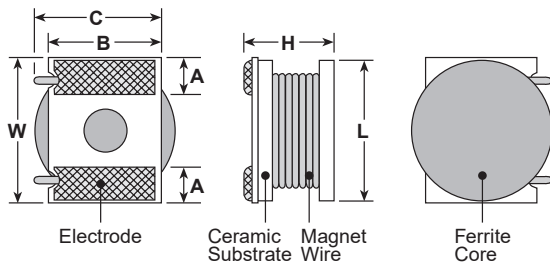


Size	Dimensions inches (mm)					
	L	W	H Max.	A	B	C
4045	$\phi .157 \pm .008$ ( $\phi 4.0 \pm 0.2$ )	$.177 \pm .008$ ( $4.5 \pm 0.2$ )	$.169 \pm .009$ ( $4.3 \pm 0.2$ )	$.039 \pm .112$ ( $1.0 \pm 0.3$ )	$.118 \pm .008$ ( $3.0 \pm 0.2$ )	$.138$ ( $3.5$ )
4235	$.177 \pm .008$ ( $4.5 \pm 0.2$ )	$.165 \pm .008$ ( $4.2 \pm 0.2$ )	$.138$ Max. ( $3.5$ Max.)	$.039 \pm .008$ ( $1.0 \pm 0.2$ )	$.079 \pm .008$ ( $2.0 \pm 0.2$ )	—
4545	$.161 \pm .012$ ( $4.1 \pm 0.3$ )	$.181 \pm .016$ ( $4.6 \pm 0.4$ )	$.181$ Max. ( $4.6$ Max.)	$.126 \pm .012$ ( $3.2 \pm 0.3$ )	—	—

LPC4235

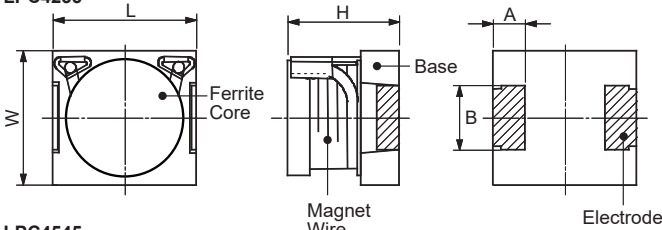

LPC4545

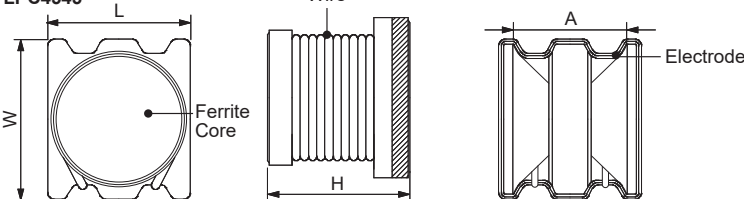

## ordering information

LPC	4235	T	TM	221	K
Type	Size	Termination Material	Packaging	Nominal Inductance	Tolerance
	4045 4235 4545	A: SnAg (4045 only) T: Sn (4235 only) C: Sn/Cu (4545 only)	TM: taping (4235) TE: taping (4545) TED: taping (4045)	3 digits 221: 220 $\mu$ H	K: $\pm 10\%$ M: $\pm 20\%$

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/20/18




## applications and ratings

Part Designation	Nominal Inductance (μH)	Inductance Tolerance	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (Amps)	
LPC4045ATED1R0M	1.0	M: ±20%	90.0	0.015	3.10	
LPC4045ATED1R5M	1.5		70.0	0.020	2.80	
LPC4045ATED2R2M	2.2		55.0	0.023	2.50	
LPC4045ATED3R3M	3.3		45.0	0.044	1.80	
LPC4045ATED4R7M	4.7		35.0	0.062	1.45	
LPC4045ATED6R8M	6.8		25.0	0.075	1.30	
LPC4045ATED100K	10	K: ±10%	23.5	0.10	1.02	
LPC4045ATED150K	15		18.5	0.15	0.84	
LPC4045ATED220K	22		14.0	0.21	0.70	
LPC4045ATED330K	33		12.0	0.41	0.52	
LPC4045ATED470K	47		10.5	0.52	0.46	
LPC4045ATED680K	68		8.0	0.67	0.40	
LPC4045ATED101K	100		6.3	0.92	0.28	
LPC4045ATED151K	150		5.2	1.80	0.25	
LPC4045ATED221K	220		3.9	2.25	0.18	
LPC4045ATED331K	330		3.0	4.27	0.15	
LPC4045ATED471K	470		2.7	5.23	0.14	
LPC4045ATED681K	680		2.2	6.67	0.12	
LPC4235TTM R82M	0.82		M: ±20%	146.6	0.017	3.34
LPC4235TTM 1R0M	1.0			125.1	0.020	3.27
LPC4235TTM 1R2M	1.2	114.7		0.023	3.10	
LPC4235TTM 1R5M	1.5	101.4		0.031	2.53	
LPC4235TTM 2R2M	2.2	78.8		0.039	2.28	
LPC4235TTM 3R3M	3.3	66.7		0.070	1.63	
LPC4235TTM 4R7M	4.7	52.0		0.090	1.44	
LPC4235TTM 6R8M	6.8	43.5	0.109	1.29		
LPC4235TTM 100K	10	K: ±10%	33.5	0.190	0.91	
LPC4235TTM 150K	15		29.1	0.230	0.87	
LPC4235TTM 220K	22		21.7	0.366	0.69	
LPC4235TTM 330K	33		13.9	0.542	0.52	
LPC4235TTM 470K	47		12.0	0.688	0.47	
LPC4235TTM 680K	68		12.7	1.30	0.34	
LPC4235TTM 101K	100		10.4	1.66	0.31	
LPC4235TTM 151K	150		7.5	2.96	0.22	
LPC4235TTM 221K	220		6.7	3.77	0.20	
LPC4545CTE 1R0M	1.0		M: ±20%	90.0	0.015	3.66
LPC4545CTE 1R5M	1.5	65.0		0.02	3.21	
LPC4545CTE 2R2M	2.2	50.0		0.023	2.96	
LPC4545CTE 3R3M	3.3	40.0		0.044	2.19	
LPC4545CTE 4R7M	4.7	35.0		0.062	1.81	
LPC4545CTE 6R8M	6.8	25.0		0.075	1.60	
LPC4545CTE 100K	10	K: ±10%	23.0	0.1	1.43	
LPC4545CTE 150K	15		15.0	0.15	1.04	
LPC4545CTE 220K	22		13.0	0.21	0.88	
LPC4545CTE 330K	33		10.0	0.41	0.60	
LPC4545CTE 470K	47		9.0	0.52	0.53	
LPC4545CTE 680K	68		7.5	0.67	0.49	
LPC4545CTE 101K	100		5.5	0.92	0.41	
LPC4545CTE 151K	150		5.0	1.8	0.29	
LPC4545CTE 221K	220		4.0	2.25	0.26	
LPC4545CTE 331K	330		2.5	4.27	0.19	
LPC4545CTE 471K	470		2.0	5.23	0.17	
LPC4545CTE 681K	680		1.8	6.67	0.15	
LPC4545CTE 152K	1500		1.3	17.04	0.10	
LPC4545CTE 222K	2200		0.9	35.0	0.07	




Allowable current is a DC Current which causes initial inductance to decrease by 10%. Or coil temperature to rise by 40°C, whichever is smaller  
 Operating Temperature Range: -40°C ~ +125°C      LPC4235: Test Report +155°C is available  
 The operating temperature range of the coil (ambient temperature + self heating) must remain at +125°C or less

### environmental applications

#### DC Bias Characteristics

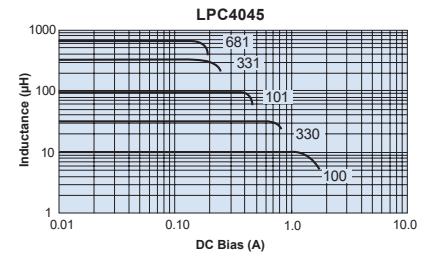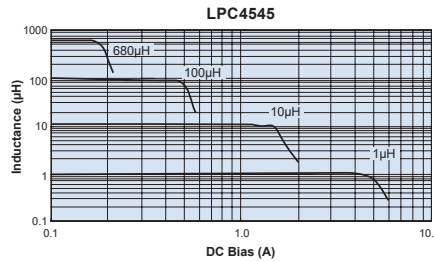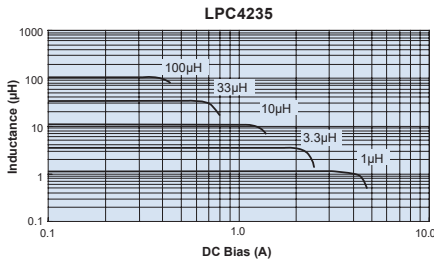

#### Surface Temperature Rise

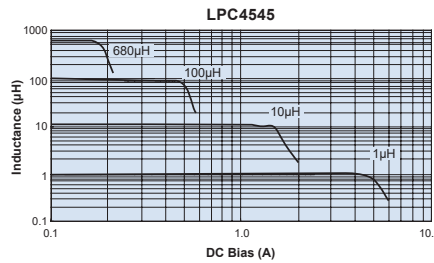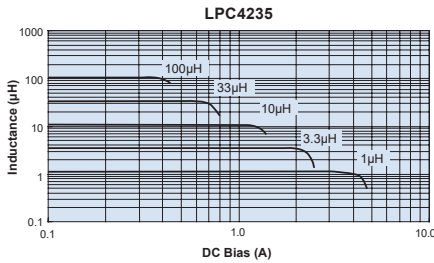

#### Performance Characteristics

Parameter	Performance Requirements $\Delta L/L$		Test Method
	Limit	Typical	
High Temperature Exposure	$\pm 5\%$	$\pm 1.3\%$	LPC4045: $+85^\circ\text{C} \pm 2^\circ\text{C}$ , 500 hours LPC4235, LPC4545: $+125^\circ\text{C} \pm 2^\circ\text{C}$ , 1000 hours
Low Temperature Exposure	$\pm 5\%$	$\pm 1.3\%$	LPC4045: $-40^\circ\text{C} \pm 2^\circ\text{C}$ , 500 hours LPC4235, LPC4545: $-40^\circ\text{C}$ , 1000 hours
Moisture Exposure	$\pm 5\%$	$\pm 1.6\%$	LPC4045: $+40^\circ\text{C}$ , 90 - 95% RH, 500 hours LPC4235, LPC4545: $+40^\circ\text{C} \pm 2^\circ\text{C}$ , 90 - 95% RH, 1000 hours
Rapid Change of Temperature	$\pm 5\%$	$\pm 1.3\%$	LPC4045: $-40^\circ\text{C}$ (30 minutes)/ $+85^\circ\text{C}$ (30 minutes), 100 cycles LPC4235, LPC4545: $-40^\circ\text{C}$ (30 minutes)/ $+125^\circ\text{C}$ (30 minutes), 100 cycles

Surface Temperature Rise graphs and additional environmental applications can be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/06/18






### features

- Monolithic structure provides high reliability in a wide temperature and humidity range
- High quality ceramic material and unique manufacturing process provides high Q at high frequency
- Nickel barrier with solder overcoat for excellent solderability
- Products with lead-free terminations meet EU RoHS requirements

### dimensions and construction

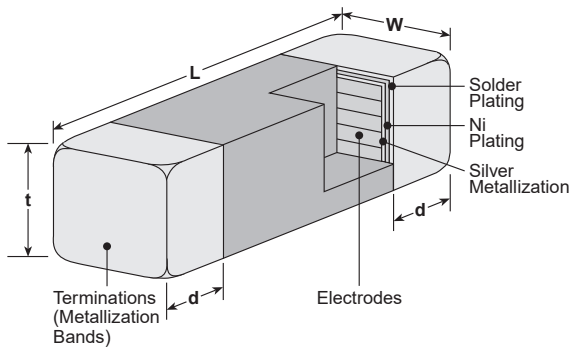

Size Code	Dimensions inches (mm)			
	L	W	t	d
<b>1E</b> <b>(0402)</b>	.039±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.02±.004 (0.5±0.1)	.01±.004 (0.25±0.1)
<b>1J</b> <b>(0603)</b>	.063±.006 (1.6±0.15)	.031±.006 (0.8±0.15)	.031±.006 (0.8±0.15)	.012±.008 (0.3±0.20)

Inductors

### ordering information

<b>MHL</b>	<b>1E</b>	<b>C</b>	<b>T</b>	<b>TP</b>	<b>3N9</b>	<b>S</b>
Type	Size Code	Material	Termination Material	Packaging	Nominal Inductance	Tolerance
	1E 1J	Permeability Code: C	T: Sn	TP: 7" paper tape 2 mm pitch (1E only - 10,000 pieces/reel) TD: 7" paper tape (1J - 4,000 pieces/reel)	3N9 = 3.9nH R10 = 100nH	S: ±0.3nH J: ±5%

For further information on packaging, please refer to Appendix A.

### applications and ratings

Part Designation	Inductance L (nH)	Inductance Tolerance	Q Minimum (100MHz)	Self Resonant Frequency Typical (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	Operating Temperature Range**	
MHL1ECTTP1N0*	1.0	S: ±0.3nH	8	10000	0.12	300	-55°C to +125°C	
MHL1ECTTP1N2*	1.2							
MHL1ECTTP2N2*	2.2							
MHL1ECTTP3N3*	3.3			4000	6000			0.16
MHL1ECTTP3N9*	3.9							
MHL1ECTTP4N7*	4.7							
MHL1ECTTP5N6*	5.6							


applications and ratings (continued)

Part Designation	Inductance L (nH)	Inductance Tolerance	Q Minimum (100MHz)	Self Resonant Frequency Typical (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	Operating Temperature Range**						
MHL1ECTTP6N8*	6.8	J: ±5%	8	3900	0.32	300	-55°C to +125°C						
MHL1ECTTP8N2*	8.2			3500	0.37								
MHL1ECTTP10N*	10			3200	0.42								
MHL1ECTTP12N*	12			2600	0.50								
MHL1ECTTP15N*	15			2300	0.55								
MHL1ECTTP18N*	18			2000	0.65								
MHL1ECTTP22N*	22			1600	0.8	200							
MHL1ECTTP27N*	27			1400	0.9								
MHL1ECTTP39N*	39			1100	1.2								
MHL1ECTTP47N*	47			900	1.3	100							
MHL1ECTTP56N*	56			750	1.4								
MHL1ECTTP82N*	82			600	1.6	100							
MHL1ECTTPR10*	100			600	2.0								
MHL1JCTTD1N5*	1.5			S: ±0.3nH	8	6000		0.10	600	-55°C to +125°C			
MHL1JCTTD1N8*	1.8												
MHL1JCTTD2N2*	2.2												
MHL1JCTTD2N7*	2.7												
MHL1JCTTD3N3*	3.3	10	5200				0.13						
MHL1JCTTD3N9*	3.9		5000				0.15						
MHL1JCTTD4N7*	4.7		4000				0.20						
MHL1JCTTD5N6*	5.6		4000				0.23						
MHL1JCTTD6N8*	6.8	J: ±5%	12				3500				0.28	600	-55°C to +125°C
MHL1JCTTD8N2*	8.2						3200				0.30		
MHL1JCTTD10N*	10			2600	0.35								
MHL1JCTTD12N*	12			2300	0.40								
MHL1JCTTD15N*	15			2000	0.45								
MHL1JCTTD18N*	18			2000	0.45								
MHL1JCTTD22N*	22			1600	0.50	500							
MHL1JCTTD27N*	27			1400	0.55								
MHL1JCTTD33N*	33			1200	0.60								
MHL1JCTTD39N*	39			1100	0.65								
MHL1JCTTD47N*	47	900	0.70	400									
MHL1JCTTD68N*	68	700	0.80										
MHL1JCTTD82N*	82	600	1.0	300									
MHL1JCTTDR12*	120	500	1.3										
MHL1JCTTDR15*	150	500	1.7	250									
MHL1JCTTDR22*	220	400	2.0										

\*Add tolerance character (S, J)

\*\* The operating temperature range of the coil (ambient temperature + self heating) must remain at +125°C or less


\*\*\* 50MHz

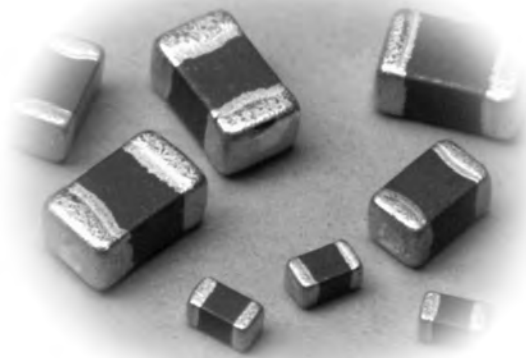

### features

- Designed to reduce noise at high frequencies
- Standard EIA packages: 1E, 1J, 2A, 2B
- Nickel barrier with solder overcoat for excellent solderability
- Magnetically shielded
- Marking: Black body color with no marking
- Products with lead-free terminations meet EU RoHS requirements

### dimensions and construction

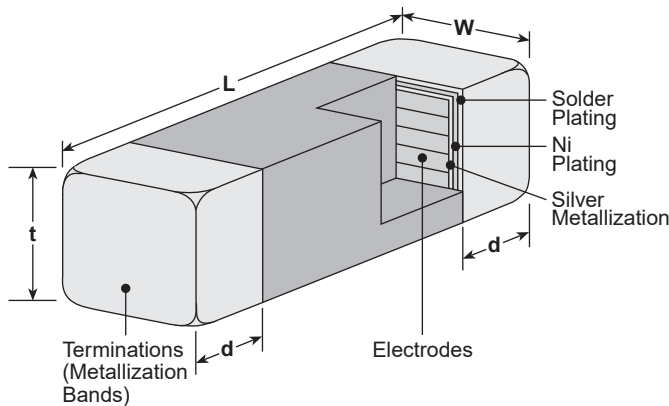

Type (Inch Size Code)	Dimensions inches (mm)			
	L	W	t	d
<b>1E</b> (0402)	.039±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.02±.004 (0.5±0.1)	.01±.004 (0.25±0.1)
<b>1J</b> (0603)	.063±.006 (1.6±0.15)	.031±.006 (0.8±0.15)	.031±.006 (0.8±0.15)	.014±.006 (0.36±0.15)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.008 (1.25±0.2)	.035±.008 (0.9±0.2)	.020±.012 (0.51±0.30)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.043±.008 (1.1±0.2)	.020±.012 (0.51±0.30)

Inductors

### ordering information

<b>CZB</b>	<b>1E</b>	<b>G</b>	<b>T</b>	<b>TP</b>	<b>100</b>	<b>P</b>
Type	Size	Permeability Code	Termination Material	Packaging	Impedance	Tolerance
	1E 1J 2A 2B	F G S	T: Sn	TP: 7" paper tape (1E only - 10,000 pieces/reel) TD: 7" paper tape (1J, 2A - 4,000 pieces/reel) TE: 7" embossed plastic (2B - 3,000 pieces/reel)	2 significant figures + 1 multiplier	P: ±25%

For further information on packaging, please refer to Appendix A.

## applications and ratings

Part Designation	Impedance @ 100MHz <sup>†</sup> (Ω)	DC Resistance Maximum <sup>††</sup> (Ω)	Allowable DC Current Maximum (mA)	Operating Temperature Range
CZB1EGTTP100P	10	0.05	600	-55°C to +125°C
CZB1EGTTP700P	70	0.40	350	
CZB1EGTTP121P	120	0.50	300	
CZB1EGTTP221P	220	0.70	200	
CZB1EGTTP301P	300	0.80		
CZB1EGTTP601P	600	1.00	150	
CZB1EGTTP102P	1000	1.50	100	
CZB1JGTTD300P	30	0.10	600	
CZB1JGTTD600P	60	0.20		
CZB1JGTTD800P	80			
CZB1JGTTD101P	100	0.25	400	
CZB1JGTTD121P	120			
CZB1JGTTD141P	140			
CZB1JGTTD221P	220	0.30	300	
CZB1JGTTD301P	300			
CZB1JGTTD451P	450	0.40	250	
CZB1JGTTD601P	600	0.45		
CZB1JGTTD102P	1000	0.60	150	
CZB1JGTTD152P	1500	0.70		
CZB1JGTTD202P	2000	1.20		
CZB2AFTTD500P	50	0.10	800	-55°C to +125°C
CZB2AGTTD101P	100	0.15	600	
CZB2AGTTD121P	120	0.25	600	
CZB2AGTTD301P	300	0.30	400	
CZB2AGTTD601P	600			
CZB2AGTTD601PV	600	0.25	500	
CZB2AGTTD102P	1000	0.40	300	
CZB2BFTTE190P	19	0.10	800	-55°C to +125°C
CZB2BFTTE300P	30			
CZB2BFTTE600P	60			
CZB2BFTTE800P	80	0.20	600	
CZB2BFTTE101P	100	0.20		
CZB2BFTTE121P	120	0.15		
CZB2BFTTE201P	200	0.20	500	
CZB2BFTTE301P	300	0.30		
CZB2BFTTE601P	600	0.40		

<sup>†</sup> Impedance test method: HP4291A

<sup>††</sup> DCR test method: Keithley 580


For complete environmental specifications, please refer to [www.koaspeer.com](http://www.koaspeer.com)



### features

- Designed to reduce noise at high frequencies
- Standard EIA packages: 1J, 2A, 2B
- Nickel barrier with solder overcoat for excellent solderability
- Magnetically shielded
- Marking: Black body color with no marking
- Products with lead-free terminations meet EU RoHS requirements

### dimensions and construction

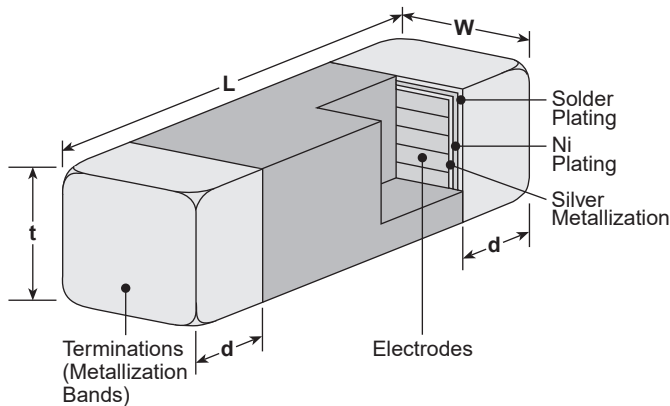

Type (Inch Size Code)	Dimensions inches (mm)			
	L	W	t	d
<b>1J</b> (0603)	.063±.006 (1.6±0.15)	.031±.006 (0.8±0.15)	.031±.006 (0.8±0.15)	.014±.006 (0.36±0.15)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.047±.008 (1.20±0.2)	.035±.008 (0.9±0.2)	.02±.012 (0.51±0.30)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.043±.008 (1.1±0.2)	.02±.012 (0.51±0.30)

### ordering information

<b>CZP</b>	<b>2A</b>	<b>F</b>	<b>T</b>	<b>TD</b>	<b>300</b>	<b>P</b>
Type	Size	Permeability Code	Termination Material	Packaging	Impedance	Tolerance
	1J 2A 2B	F P	T: Sn	TD: 7" paper tape (1J, 2A - 4,000 pieces/reel) TE: 7" embossed plastic (2B - 3,000 pieces/reel)	2 significant figures + 1 multiplier	P: ±25%

For further information on packaging, please refer to Appendix A.

## applications and ratings

Part Designation	Impedance @ 100MHz (Ω)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	Operating Temperature Range	
CZP1JFTTD300P	30	0.03	3000	-55°C to +125°C	
CZP1JFTTD600P	60	0.04			
CZP1JFTTD121P	120	0.10	2000		
CZP1JFTTD181P	180				
CZP1JFTTD221P	220				
CZP1JFTTD301P	300				
CZP1JFTTD601P	600	0.20	1000		
CZP2AFTTD300P	30	0.015	4000		-55°C to +125°C
CZP2AFTTD600P	60	0.04	3000		
CZP2AFTTD800P	80				
CZP2AFTTD221P	220				
CZP2AFTTD301P	300	0.15	2000		
CZP2AFTTD601P	600	0.20			
CZP2AFTTD102P	1000			1000	
CZP2BFTTE190P	19	0.02	4000	-55°C to +125°C	
CZP2BFTTE300P	30				
CZP2BFTTE500P	50	0.025	3000		
CZP2BFTTE800P	80	0.03			
CZP2BFTTE101P	100	0.08			2500
CZP2BFTTE121P	120				
CZP2BFTTE601P	600		0.20		
CZP2BPTTE600P	60	0.02	6000		
CZP2BPTTE101P	100	0.03	3000		
CZP2BPTTE121P	120	0.04			
CZP2BPTTE601P	600	0.10			1500

For complete environmental specifications, please refer to [www.koaspeer.com](http://www.koaspeer.com)



### Precautions for the Fusing Components

Refer to the precautions of common matters for all products in the beginning of this catalog.

#### Safety Standards

- KOA's fuse components comply with the following safety standards:
  - U.S.A. UL (Underwriters Laboratories Inc.) UL248
  - CANADA CSA (Canadian Standards Association) C22.2 No.248 c-UL (Underwriters Laboratories Inc.) UL248
  - INTERNATIONAL IEC (International Electrotechnical Commission) 60127-1, -4


#### Rated Current

- Specified amperage that conforms to safety standards, such as fusing time. This is not to be confused with the steady-state (stationary) current, which is calculated using the following equation:
 
$$\text{Stationary Current} \leq \text{Rated Current} \times \text{Stationary Derating Coefficient} \times \text{Ambient Temperature Derating}$$
 The table below indicates deratings for each type of products.

Type	Stationary Derating Coefficient
CCF1N, CCF1F	0.7
TF16AT	0.75
TF10BN, TF16SN, TF16VN	1.0
CCP2B, CCP2E	1.0

#### Deratings for Ambient Temperatures

The following Deratings for Ambient Temperatures are required:

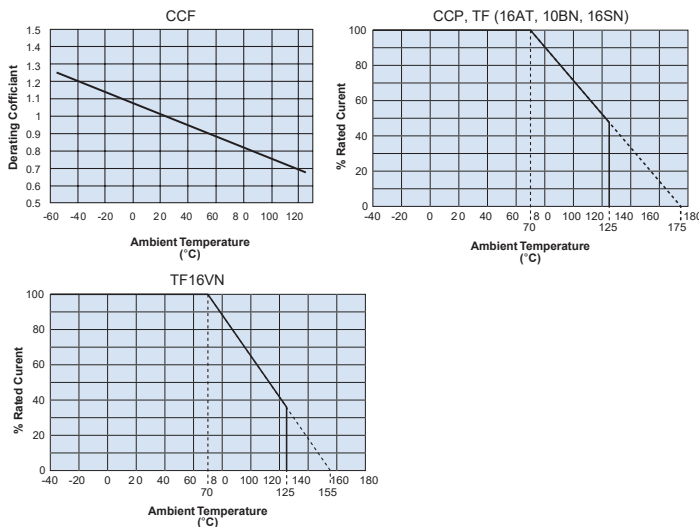

- Ambient Temperature Derating values are found on product datasheets.
- If the current waveform is a repeated pulse or AC waveform, the peak current shall be both the rated current and stationary current. Do not use the effective value of the current waveform.

#### Rated Voltage

- A rated voltage indicates the voltage that does not run through electrodes after the fuse blows. In case of exceeding the rated voltage, the circuit voltage should be applied at voltage not higher than the rated voltage because the current may run again or may break the elements.

#### Interrupting Capacity

- Maximum current and voltage that can be interrupted when an abnormal situation arises. Make sure beforehand that voltage and current at the time of abnormality occurring in the circuit are within the interrupting capacity.

Type	Fusing Current	Fusing Time
CCF1N (0.4~10)	Rated Current x 2 or Over	1 second
CCP2B	Rated Current x 2 or Over	1 second
CCP2E	Rated Current x 2.5 or Over	1 second
CCP2E H	Rated Current x 2 or Over	1 second
TF16SN	Rated Current x 2 or Over	1 second
TF10BN	Rated Current x 2 or Over	5 seconds
TF16AT	Rated Current x 2 or Over	5 seconds
TF16VN	Rated Current x 2.5 or Over	5 seconds
CCF1N (12, 15)	Rated Current x 2 or Over	60s second
CCF1F	Rated Current x 2 or Over	120 seconds

#### Fusing Current

- Minimum current needed to break fusing element. Refer to the following list to quickly interrupt if an abnormal current occurred in the circuit:
  - If fusing time is within 1 second or greater, the variance in the fusing time is largely affected by the surroundings (temperature, mounting pad dimensions, substrate material, etc.). Verification should be made with an actual circuit.

#### Anti-Surge Characteristics

There are limits to applications of transient overcurrents (inrush current, reversible current at motor-lock, etc.) that occur in circuits. It is necessary to select proper products that withstand such overcurrents without fusing. Select proper fusing components considering the following conditions:

- The transient phenomenon varies with the ambient temperature, charging/discharging conditions of capacitors, etc. Check the current waveform under such conditions that the stationary current also becomes the peak current. If the circuit has components highly dependent on temperature, such as thermistors, etc., please do a check under these conditions.
- For a peak current observation, shorten the sampling time of an oscilloscope to verify the maximum value of the wave-form of the surge current.
- We recommend the current measurement using current probe. If current measuring is performed by measuring voltages of shunt resistors, etc., use the lowest possible resistances.

#### Operation Check

- Before you decide which fuse product you use, please mount the selected fuse on actual device and confirm that rush current and surge current have enough margin and that the product has performance that enables it to interrupt the abnormal current quickly.

#### Soldering

- This product is suitable both for reflow-soldering and for flowsoldering, but excessive heat may cause an open-circuit and change its characteristics.
- The part shall be soldered at the maximum temperature of 260°C or less.
- If a soldering iron is used, it shall be at 350°C or less and should be soldered in a short time. Further, pay attention that the products are not touched directly by the top of the iron. It may cause disconnection or characteristic change.

#### Placement

- If resin coating, potting or encapsulation molding is used, please confirm reliability. Small contractile stress at resin stiffening time can cause cracks, fuse shear line, or resistance change. Also, the generated heat may not be able to dissipate properly, causing a change in fusing characteristics.
- The fusing characteristics may change when there are components that generate heat around the fuses. Keep fuses away from those parts.

#### Storage

- Avoid storing components under the condition of high temperature/high humidity (40°C/70%RH or more) which may deteriorate solderability.
- Also avoid direct sun light which may deteriorate solderability and induce changes in taping strength.se parts.

#### Parts Selection

- If you have any questions about fuse selection, please do not hesitate contacting us.

#### Reference

- For basic precautions, refer to JEITA technical report "JEITA RCR-4800 Safety application guide on fuse for use in electronic and electrical equipment".


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/15/16

**features**

- Small, lightweight design
- Special manufacturing method stabilizing fusing characteristics and occupying less area
- Low power consumption and less voltage drop due to low internal resistance
- Suitable for overcurrent protection of circuit block in electronic devices
- Suitable for flow and reflow soldering
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

**dimensions and construction**

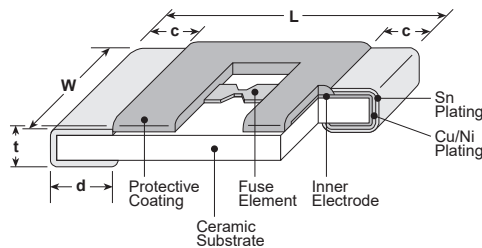

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>TF10BN (0402)</b>	.04±.004 (1.0±0.1)	.02±.002 (0.5±0.05)	.008±.004 (0.2±0.1)	.01±.004 (0.25±0.1)	.015±.002 (0.4±0.05)
<b>TF16AT (0603)</b>	.063±.004 (1.6±0.1)	.031±.003 (0.8±0.08)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.002 (0.45±0.05)
<b>TF16SN (0603)</b>	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.015+ <sup>+0.04</sup> -.002 (0.4+ <sup>+0.1</sup> -.05)

**ordering information**

<b>TF</b>	<b>16S</b>	<b>N</b>	<b>1.25</b>	<b>T</b>	<b>TE</b>
Type	Size 10B: 1.0x0.5mm 16A: 1.6x0.8mm 16S: 1.6x0.8mm	Fusing Characteristic N: Normal blow T: Anti pulse (16A only)	Rated Current Reference rating chart	Termination Material T: Sn	Packaging TB: 2mm pitch punched paper (TF10BN only, 10,000 pieces/reel) TD: 4mm pitch punched paper (TF16 only, 5,000 pieces/reel)

**applications and ratings**

Part Designation	Marking	Rated Current	Fusing Time	Internal R. Maximum (mΩ)	Rated Voltage	Rated Ambient Temperature	Operating Temperature Range
TF10BN0.20	A	0.20A	Open within 5 sec. at 200% rated current (Refer to Fusing Characteristics graph)	1990	32V	+70°C	-55°C to +125°C
TF10BN0.25	C	0.25A		1270			
TF10BN0.315	D	0.315A		850			
TF10BN0.50	F	0.50A		320			
TF10BN0.63	I	0.63A		200			
TF10BN0.80	K	0.80A		135			
TF10BN1.00	L	1.00A		115			
TF10BN1.25	M	1.25A		90			
TF10BN1.60	N	1.60A		58			
TF10BN2.00	S	2.00A		42			
TF10BN2.50	T	2.50A		35			
TF10BN3.00	V	3.00A		30			
TF16AT0.25	C	0.25A	Open within 5 sec. at 200% rated current (Refer to Fusing Characteristics graph)	498	32V	+70°C	-55°C to +125°C
TF16AT0.315	D	0.315A		384			
TF16AT0.50	F	0.50A		198			
TF16AT0.63	I	0.63A		143			
TF16AT0.80	K	0.80A		120			
TF16AT1.00	L	1.00A		94			
TF16AT1.25	M	1.25A		73			
TF16AT1.60	N	1.60A		59			
TF16AT2.00	S	2.00A		42			
TF16AT2.50	T	2.50A		32			

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


12/01/17

**applications and ratings (continued)**

Part Designation	Marking	Rated Current	Fusing Time	Internal R. Maximum (mΩ)	Rated Voltage	Rated Ambient Temperature	Operating Temperature Range
TF16AT3.15	U	3.15A	Open within 5 sec. at 200% rated current (Refer to Fusing Characteristics graph)	24	32V	+70°C	-55°C to +125°C
TF16AT4.00	X	4.00A		17			
TF16AT5.00	Y	5.00A		14			
TF16SN0.20	A	0.20A	Open within 1 sec. at 200% rated current (Refer to Fusing Characteristics graph)	1500	32V	+70°C	-40°C to +125°C
TF16SN0.25	C	0.25A		960			
TF16SN0.315	D	0.315A		600			
TF16SN0.40	H	0.40A		440			
TF16SN0.50	F	0.50A		300			
TF16SN0.63	I	0.63A		190			
TF16SN0.70	J	0.70A		170			
TF16SN0.80	K	0.80A		135			
TF16SN1.00	L	1.00A		103			
TF16SN1.25	M	1.25A		78			
TF16SN1.60	N	1.60A		58			
TF16SN2.00	S	2.00A		47			
TF16SN2.50	T	2.50A		38			
TF16SN3.15	U	3.15A		28			

**environmental applications**




**Derating Curve**

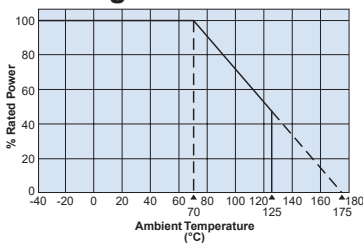

Stationary Current: Regard the peak of stationary current waveform as stationary current value when the stationary current is repeated pulse.

Temperature Derating: Rated current needs to be derated if used at an ambient temperature 70°C or above. Refer to the derating coefficient on the left figure.

**Fusing Characteristics**

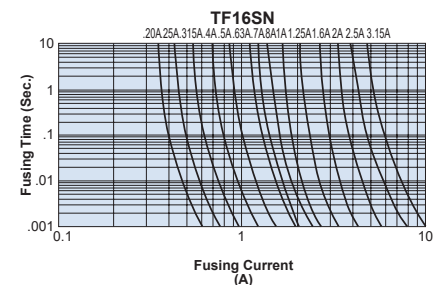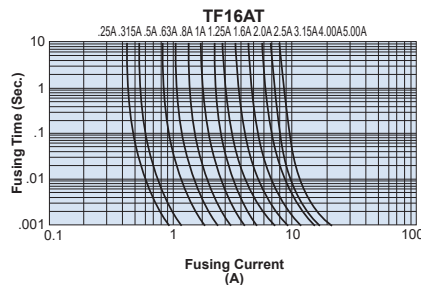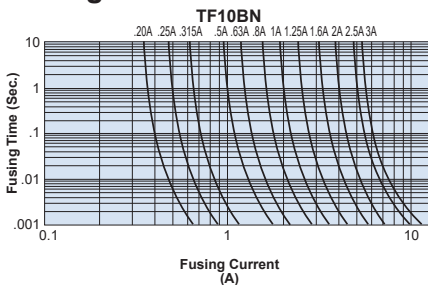

**Performance Characteristics**

Parameter	Requirement		Test Method
	Limit	Typical	
Fusing Characteristics	Within 1 second (16SN) Within 5 seconds (10BN, 16AT)	—	200% of rated voltage shall be carried (@25°C)
Bending Test	No mechanical damages	—	Distance between holding points: 90mm, Bending: 3mm, 1 time (BN, AT), 2mm, 1 time (SN)
Resistance to Solder Heat	±10%	±4.5% (16SN) ±5% (10BN, 16AT)	260°C ± 5°C, 10 seconds ± 0.5 <sup>nd</sup> second
Solderability	95% coverage minimum	—	245°C ± 3°C, 3 seconds ± 0.5 second
Load Life	±10%	±4.5% (16SN) ±5% (10BN, 16AT)	70°C ± 2°C, 1000 hours, rated current x 100%, 1.5 hr ON, 0.5 hr OFF cycle
Load Life Moisture	±10%	±3% (10BN) ±4.5% (16SN), 5% (16AT)	40°C ± 2°C, 90 - 95% RH, 1000 hours, rated current x 100% (10BN, 16SN), x 75% (16AT), 1.5 hr ON, 0.5 hr OFF cycle
Rapid Change of Temperature	±10%	±4% (16SN) ±5% (10BN, 16AT)	16SN: -40°C ± 2°C (30 minutes), 10BN, 16AT: -55°C ± 2°C, +125°C (30 minutes), 10 cycles
Resistance to Solvent	No evidence of damages to protective coating and marking	—	Conforming to MIL-STD-202F
Residual Resistance	10kΩ and more	—	Measure DC resistance after fusing


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/19/17

## features

- Small and light chip current fuses for the secondary circuit
- Temperature cycle (-55°C ~ 125°C), 1000 cycle
- Original construction and manufacturing method stabilize fusing characteristics
- Suitable for overcurrent protection of circuit block in small electronic devices
- Suitable for reflow solderings
- Products meet EU RoHS requirements
- AEC-Q200 Qualified

## dimensions and construction

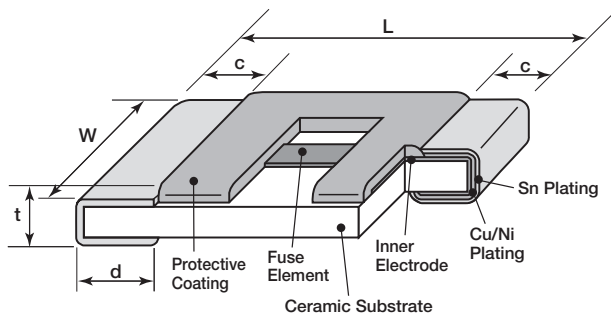

Type	Dimensions inches (mm)				
	L	W	c	d	t
<b>TF16VN (0603)</b>	.063±.004 (1.6±0.1)	.031±.004 (0.8±0.1)	.014±.004 (0.35±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)

## ordering information

TF	16V	N	2.50	T	TD
Product Code	Size	Fusing Characteristics	Rated Current	Terminal Surface Material	Taping
	16V: 1.6 x 0.8mm	N: Normal blow		T: Sn	TD: 4mm pitch punch paper BK: Bulk

For further information on packaging, please refer to Appendix A.


## ratings

Type	Marking	Rated Current	Fusing Time	Internal R. (mΩ)Max.	Rated Voltage	Rated Ambient Temp.	Operating Temperature Range	Taping & Q'ty/Reel (pcs)
								TD
TF16VN0.40	H	0.40A	Open within 5 sec. at 250% rated current. Refer to the graph of fusing characteristics.	760	32V	+70°C	-55°C ~ 125°C	5,000
TF16VN0.50	F	0.50A		520				
TF16VN0.63	I	0.63A		370				
TF16VN0.80	K	0.80A		200				
TF16VN1.00	L	1.00A		160				
TF16VN1.25	M	1.25A		130				
TF16VN1.60	N	1.60A		100				
TF16VN2.00	S	2.00A		80				
TF16VN2.50	T	2.50A		60				
TF16VN3.15	U	3.15A		40				

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. 10/26/18

## environmental applications


### Derating Curve

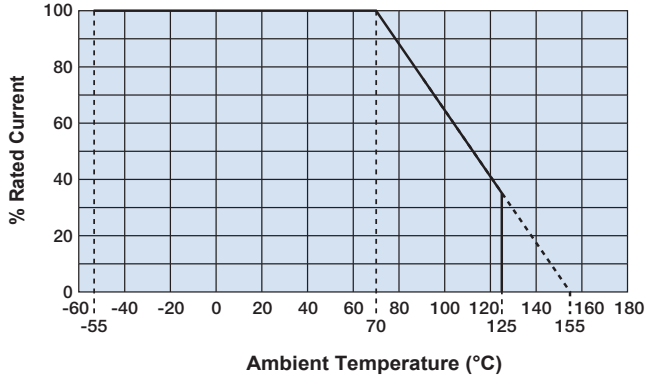

Stationary current: Regard the peak of stationary current waveform as stationary current value when the stationary current is repeated pulse.

Temperature Derating: Rated Current needs to be derated if used at an ambient temperature of 70°C or more. Refer to the derating coefficient on the left figure.

### Fusing Characteristics (Average Fusing Time)

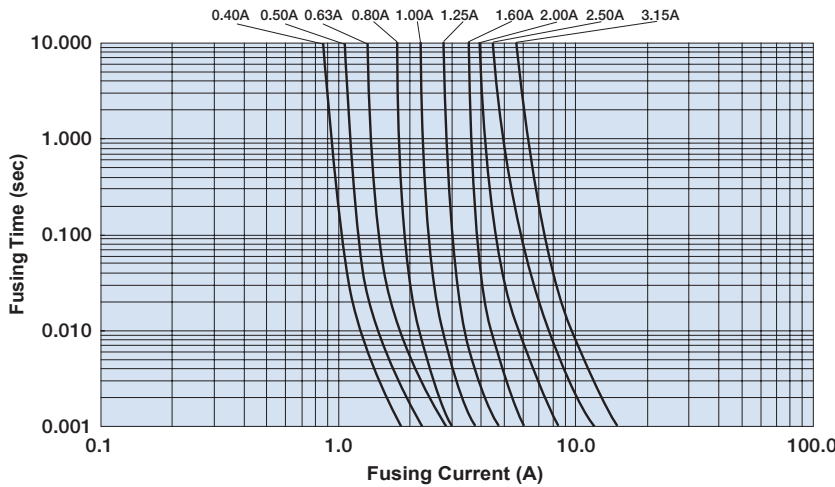

## Performance Characteristics

Test Items	Performance Requirements $\Delta R \pm \%$		Test Methods
	Limit	Typical	
Fusing Characteristics	Within 5 seconds	—	250% of rated current shall be carried (@25°C)
Bending Test	No mechanical damages	—	Distance between holding points 90mm, bending width 2mm, 1 time.
Resistance to Soldering Heat (Reflow Soldering)	10	5	Preheating: 150+30°C, 90 ± 30 seconds Heating: 230°C or more, 30 ± 10 seconds, max. 260°C
Solderability	95% coverage min.	—	245°C±3°C, 3 seconds ± 0.5 seconds
Load Life	10	5	70°C±2°C, 1000h, Rated current × 100%, 1.5h ON/0.5h OFF cycle
Load Life Moisture	10	5	85°C±2°C, 85%±5%RH, 1000h, Rated current × 10%, 1.5h ON/0.5h OFF cycle
Rapid Change of Temperature	10	5	-55°C (30min.)/+125°C (30min.) 1000 cycles
Resistance to Solvent	No evidence of damages to protective coating and marking.	—	Conforming to MIL-STD-202F
Residual Resistance	10kΩ or more	—	Measure DC resistance after fusing

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/17/18






## features

- Immediate cut-off of excessive heat
- No generation of heat
- UL94V0 epoxy case
- Suitable for flow and reflow soldering
- UL248.14, file #131375
- One-time fuse device
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

## dimensions and construction

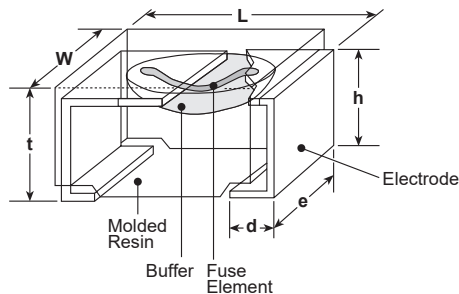

Size Code	Dimensions inches (mm)					
	L	W	t	h	e	d
2B	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.047±.008 (1.2±0.2)	.031±.004 (0.8±0.1)	.047±.004 (1.2±0.1)	.024±.004 (0.6±0.1)
2E		.098±.008 (2.5±0.2)	.087±.008 (2.2±0.2)	.075±.004 (1.9±0.1)	.067±.004 (1.7±0.1)	.02±.004 (0.5±0.1)

## ordering information

CCP	2B	20		T	TE
Type	Size Code	Rating	Fusing Magnification	Termination Material	Packaging
	2B: 1206 2E: 1210	Reference rating chart	Blank: 200% (2B) 250% (2E) H: 200% (2H)	T: Sn	TE: 7" embossed plastic (2B - 3,000 pieces/reel) (2E - 2,000 pieces/reel)

## applications and ratings

Part Designation	Current Rating	Fusing Current	Fusing Time	Internal R. Maximum (mΩ)	Maximum Open Circuit Voltage*	Rated Ambient Temperature	Operating Temperature Range
CCP2B15	0.75A	1.5A	1 second max. @ fusing current	150	24V (40V/76V)*	+70°C	-40°C to +125°C
CCP2B20	1.00A	2.0A		100			
CCP2B25	1.25A	2.5A		75			
CCP2B30	1.50A	3.0A		60			
CCP2B35	1.75A	3.5A		50			
CCP2B40	2.00A	4.0A		45			
CCP2B50	2.50A	5.0A		35			
CCP2B63	3.15A	6.3A		23			
CCP2B80	4.00A	8.0A		19			
CCP2B100	5.00A	10.0A		15			
CCP2E10H	0.50A	1.0A		200			
CCP2E13H	0.65A	1.3A		170			
CCP2E15H	0.75A	1.5A		150			
CCP2E20H	1.00A	2.0A		100			
CCP2E25H	1.25A	2.5A		75			
CCP2E30H	1.50A	3.0A		60			
CCP2E35H	1.75A	3.5A		50			
CCP2E38H	1.90A	3.8A		48			

\* Note: High rated voltage (76V: 0.75A ~ 3.15A; 40V: 4A ~ 5A) also available, please contact KOA.

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/12/17




## applications and ratings (continued)



Part Designation	Current Rating	Fusing Current	Fusing Time	Internal R. Maximum (mΩ)	Maximum Open Circuit Voltage	Rated Ambient Temperature	Operating Temperature Range
CCP2E40H	2.00A	4.0A	1 second max. @ fusing current	45	72V	+70°C	-40°C to +125°C
CCP2E45H	2.25A	4.5A		40			
CCP2E50H	2.50A	5.0A		35			
CCP2E63H	3.15A	6.3A		23			
CCP2E100	4.00A	10.0A		15			
CCP2E10	0.4A	1.0A		200			
CCP2E13	0.52A	1.3A		170			
CCP2E15	0.6A	1.5A		150			
CCP2E20	0.8A	2.0A		100			
CCP2E25	1.0A	2.5A		75			
CCP2E30	1.2A	3.0A		60			
CCP2E35	1.4A	3.5A		50			
CCP2E38	1.5A	3.8A		48			
CCP2E40	1.6A	4.0A		45			
CCP2E45	1.8A	4.5A		40			
CCP2E50	2.0A	5.0A		35			
CCP2E63	2.5A	6.3A		23			

## environmental applications

### Derating Curve

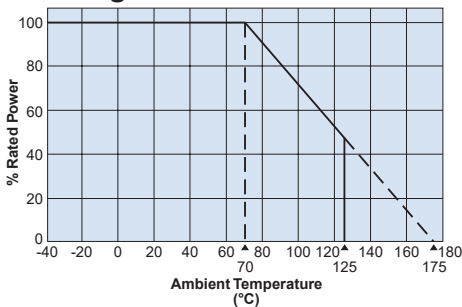

### Fusing Characteristics

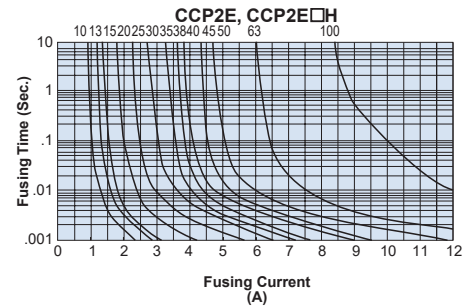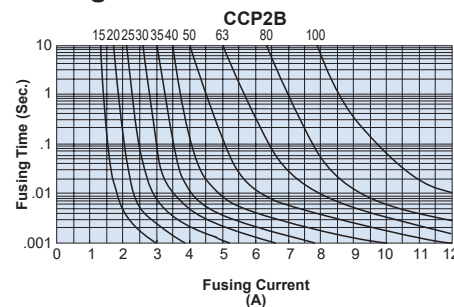

## Performance Characteristics


Parameter	Requirement Δ R±%		Test Method
	Limit	Typical	
Fusing Characteristics	Within 1 second	—	CCP2B: 200% of rated current shall be carried CCP2E: 250% of rated current shall be carried CCP2E□H: 200% of rated current shall be carried
Open Circuit Voltage	No fusing, flaming, explosion	—	Apply DC voltage between the termination after fusing. CCP2B: 24V; CCP2E, CCP2E□H: 72V
Residual Resistance	10kΩ or more	—	Measure DC resistance after fusing
Bending Test	No mechanical damages	—	Distance between holding points 90mm, bending width 10mm, 1 time
Resistance to Soldering Heat	±10%	±2.5%	260°C ±5°C, 10 seconds ± 0.5 seconds, 2 cycles
Solderability	±95% coverage min.	—	230°C ±5°C, 3 seconds ± 0.5 seconds
Load Life	±10%	±3%	70°C ± 3°C, 1000 hours, rated current, 1.5 hr ON, 0.5 hr OFF cycle
Load Life Moisture	±10%	±1.5%	40°C ± 2°C, 90 - 95% RH, 1000 hours, rated current, 1.5 hr ON, 0.5 hr OFF cycle
Rapid Change of Temperature	±10%	±4.0%	-40°C (30 minutes), +125°C (30 minutes), 10 cycles
Resistance to Solvent	No evidence of damages to protective coating and marking	—	Conforming to MIL-STD-202F



**features**

- Surface mount fuse suitable for primary and secondary circuits
- Ceramic case provides excellent mechanical strength
- Suitable for flow and reflow soldering
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

**dimensions and construction**

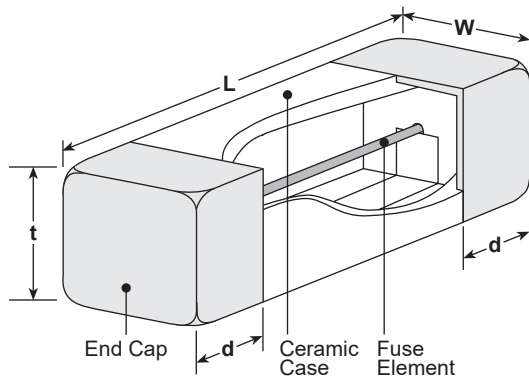

Type	Dimensions inches (mm)			
	L	W	t	d
CCF	.236±.008 (6.0±0.2)	.098±.008 (2.5±0.2)	.098±.008 (2.5±0.2)	.055±.008 (1.4±0.2)

**ordering information**

CCF	1	N	1		T	TE
Type	Style	Characteristic	Rated Current	Rated Voltage (UL)	Termination Material	Packaging
		N: Normal blow	Reference rating chart	Nil: 125Va.c./60Vd.c. or 65Va.c./65Vd.c. D: 125Va.c./160Vd.c.	T: Sn	TE: 4mm pitch embossed plastic (1,000 pieces/reel)

For further information on packaging, please refer to Appendix A.


## applications and ratings

Part Designation	Current Rating	Voltage Rating	Operating Temperature Range	Interrupting Capacity	Fusing Characteristics		Internal R. (mΩ) Max.	Normal Melting It (A², seconds)
					Rated Current	Fusing Time		
CCF1N0.4	400mA	UL (c-UL) AC 125V DC 60V (DC 160V)	-55°C to +125°C	UL (c-UL) AC 125V 50A DC 60V 50A (DC 160V)	UL (c-UL) 100% 200%	4 hour min. 1 second max.	650	0.024
CCF1N0.5	500mA						510	0.030
CCF1N0.63	630mA						390	0.052
CCF1N0.8	800mA						250	0.125
CCF1N1	1A	PSE AC 100V		PSE AC 100V 100A	PSE 130% 160% 200%	4 hour min. 1 hour max. 1 second max.	90.4	0.156
CCF1N1.25	1.25A						75.9	0.220
CCF1N1.6	1.6A						59.3	0.513
CCF1N2	2A						42.9	0.814
CCF1N2.5	2.5A						36.6	1.31
CCF1N3.15	3.15A						26	2.37
CCF1N4	4A	UL (c-UL) AC 125V 50A DC 60V		UL (c-UL) AC 125V 50A DC 60V 50A	UL (c-UL) 100% 200%	4 hour min. 1 second max.	20.1	3.85
CCF1N5	5A						15.3	6.5
CCF1N6.3	6.3A						11.4	10.6
CCF1N7	7A						10.6	12.8
CCF1N8	8A	(DC 160V)		(DC 160V)			9.5	17.0
CCF1N10	10A		7.5				27.7	
CCF1N12	12A		4.5				73.5	
CCF1N15	15A	UL (c-UL) AC 65V DC 65V	UL (c-UL) AC 65V 50A DC 65V 50A	UL (c-UL) 100% 200%	4 hour min. 60 seconds max.	3.5	125.5	


High rated voltage products (DC 160V: 400mA to 10A) are available. Please contact KOA Speer.

## environmental applications

### Derating Curve

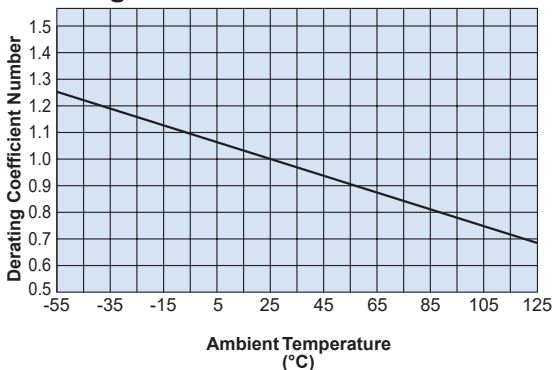

### Fusing Characteristics

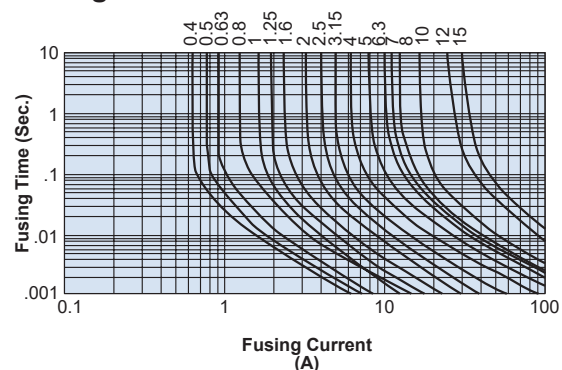

### Performance Characteristics

Parameter	Requirement $\Delta R \pm \%$		Test Method
	Limit	Typical	
Fusing Characteristics	Within specified time. No restrike	—	Fusing time measured under rated current x 160% and 200%
Surface Temperature Rise	Max. Temp. Rise 140°C	—	Surface temperature should be measured by rated current x 115%
	Max. Temp. Rise 75°C	—	Surface temperature should be measured by rated current x 100%
Bending Test	No mechanical damages	—	Distance between holding points 90mm, bent by 3mm at rate of 1mm/s
Resistance to Soldering Heat	$\pm 10\%$	$\pm 3\%$	260°C $\pm 5^\circ\text{C}$ , 10 seconds $\pm 0.5$ seconds
Solderability	$\pm 95\%$ coverage min.	—	235°C $\pm 5^\circ\text{C}$ , 3 seconds $\pm 0.5$ seconds
Load Life	$\pm 10\%$	$\pm 5\%$	70°C $\pm 2^\circ\text{C}$ , 1000 hours, rated current x 70%, 1.5 hr ON, 0.5 hr OFF cycle
Load Life Moisture	$\pm 10\%$	$\pm 5\%$	40°C $\pm 2^\circ\text{C}$ , 90 - 95% RH, 1000 hours, rated current x 70%, 1.5 hr ON, 0.5 hr OFF cycle
Rapid Change of Temperature	$\pm 10\%$	$\pm 5\%$	-55°C (30 minutes), +125°C (30 minutes), 100 cycles

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


11/06/18



### features

- Meets IEC60127-4 specifications (7A or less)
- Stable fusing characteristics due to original technology
- Suitable for reflow and flow soldering
- Products meet EU RoHS requirements
- Excellent anti-sulfuration characteristics due to using high sulfuration-proof material

### dimensions and construction

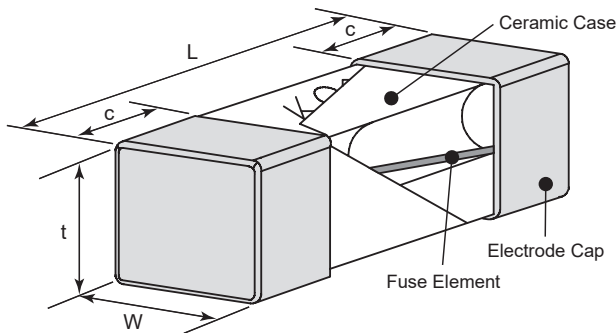

Type	Dimensions inches (mm)			
	L	W	t	c
<b>CCF1F (2410)</b>	.236±.008 (6.0±0.2)	.098±.008 (2.5±0.2)	.098±.008 (2.5±0.2)	.055±.008 (1.4±0.2)

### ordering information

<b>CCF</b>	<b>1</b>	<b>F</b>	<b>1</b>	<b>T</b>	<b>TE</b>
Type	Style	Fusing Characteristic F: Fast-acting	Rated Current	Termination Surface Material T: Sn	Packaging TE: 4mm pitch plastic embossed BK: Bulk

### applications and ratings

Part Designation	Current Rating	Voltage Rating	Interrupting Capacity	Fusing Characteristics		Internal R. (mΩ) Max.	Normal Melting Pt (A, sec.)	Operating Temperature Range
				Rated Current	Fusing Time			
CCF1F0.4	0.4A	UL(c-UL) AC 125V DC 125V	UL(c-UL) AC125V 50A DC125V 50A	UL(c-UL) 100% 200%	4 hour min. 60 sec. max.	650	0.024	-55°C to +125°C
CCF1F0.5	0.5A					510	0.030	
CCF1F0.63	0.63A					390	0.052	
CCF1F0.8	0.8A					250	0.125	
CCF1F1	1A					90.4	0.156	
CCF1F1.25	1.25A					75.9	0.220	
CCF1F1.6	1.6A					59.3	0.513	
CCF1F2	2A					42.9	0.814	
CCF1F2.5	2.5A					36.6	1.31	

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


12/12/17

applications and ratings (continued)

Part Designation	Current Rating	Voltage Rating	Interrupting Capacity	Fusing Characteristics		Internal R. (mΩ) Max.	Normal Melting Pt (A <sup>2</sup> , sec.)	Operating Temperature Range
				Rated Current	Fusing Time			
CCF1F3.15	3.15A	UL(c-UL) AC 125V DC 125V	UL(c-UL) AC125V 50A DC125V 50A	UL(c-UL) 100% 200%	4 hour min. 60 sec. max.	26.0	2.37	-55°C to +125°C
CCF1F4	4A					20.1	3.85	
CCF1F5	5A					15.3	6.5	
CCF1F6.3	6.3A					11.4	10.6	
CCF1F7	7A					10.6	12.8	
CCF1F8	8A					9.5	17.0	
CCF1F10	10A	7.5	27.7					
CCF1F12	12A	UL(c-UL) AC 65V DC 65V	UL(c-UL) AC65V 50A DC65V 50A	4.5	73.5			
CCF1F15	15A			3.5	125.5			

environmental applications


Derating Curve

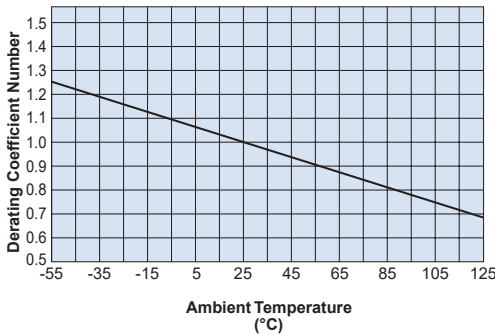

Stationary Current: Regard the peak of stationary current waveform as stationary current value when the stationary current is repeated pulse. Normal derating of this product should be 0.7max. as standards.

Deratings by ambient temperatures. When using the products at the temperatures other than normal temperature (25°C ± 5°), temperature adjustment will be required. Please refer the derating coefficient as shown in the figure.

Fusing Characteristics

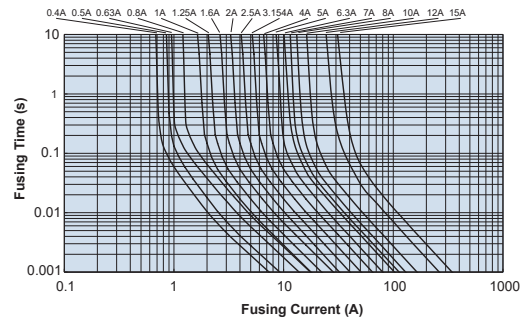

Performance Characteristics

Parameter	Requirements		Test Method
	Limit	Typical	
Fusing Characteristics	Within specified time. Insulation resistance shall not be less than 0.1MΩ	—	Fusing time measured under rated current x 200% (at 25°C)
Surface Temperature Rise	Maximum temperature rise 75°C and not fusing (all the rating)	—	Surface temperature should be measured by 1.00/n
Bending Test	No mechanical damage	—	Distance between holding points 90mm, bent by 3mm at rate of 1mm/second
Resistance to Soldering Heat	ΔR±10%	±3%	260°C ± 5°C, 10 seconds ± 0.5 seconds
Solderability	95% coverage minimum	—	235°C ± 5°C, 3 seconds ± 0.5 seconds
Load Life	ΔR±10%	±5%	70°C ± 2°C, 1000 hours, rated current x 70%, 1.5 hr ON, 0.5 hr OFF cycle
Load Life Moisture	ΔR±10%	±5%	40°C ± 2°C, 90 - 95% RH, 1000 hours, rated current x 70%, 1.5 hr ON, 0.5 hr OFF cycle
Rapid Change of Temperature	ΔR±10%	±5%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Sulfuration Test	ΔR±5%	—	Soaked in industrial oil with 3.5% sulfur concentration, 105°C±3°C, 500 hours

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/12/17

## Precautions for the Varistors

The reliability of the metal oxide varistors are dependant on the ways of their use and could lead to accidents so please be aware.

### Selection and Protection

- It is recommended that the steady-state circuit voltage which remains at 80% or less of the max. allowable circuit voltage. Exceeding the specification will cause deterioration, short-circuits, etc.
- Select proper parts according to the surge energy and the number of the impressions if the varistors are used to absorb the surge for an inductive loading.
- The rated surge endurance is defined in terms of shock wave current waveform (starting up 8 $\mu$ s/wave-tail length 20 $\mu$ s). The waveform in a practical use may be different from the test conditions, in which case, select the proper parts from the Voltage-Current Curves in the varistor catalog.
- Insert fuses or thermal fuses in series with varistors if the size of the surge power cannot be estimated, in order to prevent varistors from bursting due to an excessive surge over the rating.
- Give consideration on the layout to combustible materials and to take measurements on the circuits (fuses or thermal fuses) since there may be smoking or flaming if the varistor short-circuits due to an excessive surge over the rating.
- Upon mold sealing, fully confirm the reliability and use the resin which has small contractile stress at stiffening since the protection coat may peel off, cracks may occur at the solder connection, and the characteristics of the varistor may change.
- Perform the withstand voltage test and the insulation resistance test with the varistors removed from the circuit since the test voltage may exceed the varistor voltage.

### Failure Mode

- The varistors will deteriorate and have a possibility of short-circuiting if they are exposed to an excessive surge over the specification. A short-circuit occurs when the load factor rises against the circuit voltage due to the deterioration of a varistor voltage. Then the Joule heat is generated by the leakage current and a thermal runaway occurs. The varistors may burst and become open if a commercial power supply of 200V r.m.s. is connected to a varistor for 100V r.m.s. (270V/1mA).

### Chip Varistors for Surface Mount

- Please perform damp-proofing on the surface of the varistors prior to the use when installing in a high-humidity and high-temperature environment.

### Reference

- For basic precautions, please refer to the technical report of JEITA EMAJ-R039 Safety

## Terms and Definitions

### Maximum Allowable Circuit Voltage

- The maximum commercial frequency sinusoidal voltage effective value or maximum DC voltage which can be applied continuously.

### Maximum Energy (E)

- The maximum energy within the varistor voltage change rate of  $\pm 10\%$  when a single impulse of 2ms is applied. (NV73 2E, 2J, 2L are applied 100 times.)

### Maximum Peak Current (Ip)

- The maximum peak current within the varistor voltage change rate of  $\pm 10\%$ , when a single standard impulse of 8/20 $\mu$ s is applied in two times with an interval of 5 min. (NV73 2E, 2J, 2L are 100 times.)

### Operating Temperature (T<sub>opt</sub>)

- The allowable ambient temperature range while the device is operating.

### Storage Temperature (T<sub>stg</sub>)

- The temperature range in which the elements do not deteriorate.

### Varistor Voltage (V<sub>c</sub>)

- The terminal voltages on both ends of the varistor when the specified current is applied.


### Clamping Voltage (V<sub>P</sub>)

- The peak value of the voltage between two terminals of the varistor when the specified standard waveform impulse current (8/20 $\mu$ s) is applied.

### Recommended value of varistor voltage for the power supply voltage

Voltage of Power Line	Varistor Voltage
3.3V d.c.	8.2V
5V d.c.	8.2V, 12V
12V d.c.	24V, 27V
24V d.c.	47V, 56V
48V d.c.	82V, 100V, 120V




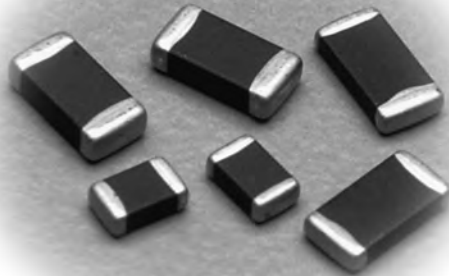

### features

- Multilayer structure
- High surge current
- Protector against static electricity, switching and incoming surges
- Suitable for both flow and reflow soldering
- Products with lead-free terminations meet EU RoHS requirements. Pb located in glass material, electrode and varistor element is exempt per Annex 1, exemption 5 of EU directive 2005/95/EC

### dimensions and construction

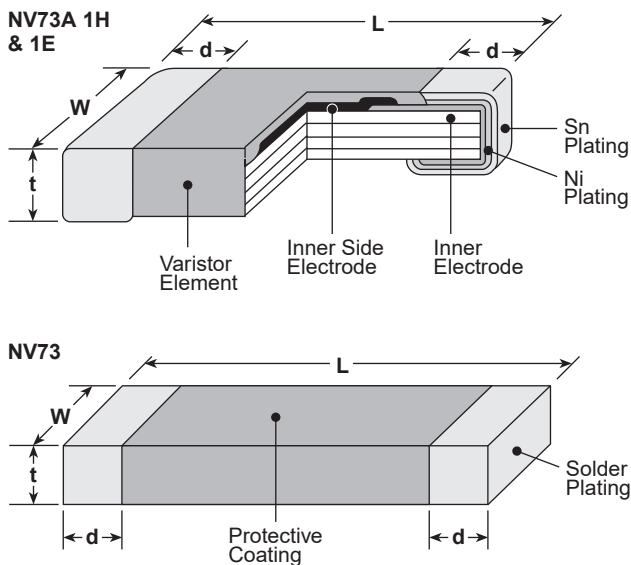

Type (Inch Size Code)	Dimensions inches (mm)			
	L	W	t	d
<b>1H</b> (0201)	.024±.001 (0.6±0.03)	.012±.001 (0.3±0.03)	.012±.001 (0.3±0.03)	.004 min. (0.1 min.)
<b>1E</b> (0402)	.023±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.023 max. (0.6 max.)	.01±.006 (0.25±0.15)
<b>1J</b> (0603)	.063±.006 (1.6±0.15)	.031±.006 (0.8±0.15)	.031±.006 (0.8±0.15)	.016 <sup>+0.006</sup> <sub>-0.008</sub> (0.4 <sup>+0.15</sup> <sub>-0.2</sub> )
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.008 (1.25±0.2)	.051 max. (1.3 max.)	.02±.010 (0.5±0.25)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.065 max. (1.65 max.)	.02 <sup>+0.014</sup> <sub>-0.010</sub> (0.5 <sup>+0.35</sup> <sub>-0.25</sub> )
<b>2E</b> (1210)	.126±.008 (3.2±0.2)	.098±.008 (2.5±0.2)	.059 max. (1.5 max.)	.020±.008 (0.5±0.2)
<b>2J</b> (1812)	.177±.008 (4.5±0.2)	.126±.008 (3.2±0.2)	.079 max. (2.0 max.)	.020 <sup>+0.012</sup> <sub>-0.004</sub> (0.5 <sup>+0.3</sup> <sub>-0.1</sub> )
<b>2L</b> (2220)	.224±.008 (5.7±0.2)	.197±.008 (5.0±0.2)	.098 max. (2.5 max.)	.020 <sup>+0.001</sup> <sub>-0.004</sub> (0.5 <sup>+0.3</sup> <sub>-0.1</sub> )
<b>C2L</b> (2220)	.232±.008 (5.9±0.2)	.201±.008 (5.1±0.2)	.106 max. (2.7 max.)	.028 <sup>+0.016</sup> <sub>-0.012</sub> (0.7 <sup>+0.4</sup> <sub>-0.3</sub> )

### ordering information

<b>NV73</b>	<b>A</b>	<b>L</b>	<b>1J</b>	<b>T</b>	<b>TE</b>	<b>8.2</b>
Type	Energy Code	Capacitance Type	Size	Termination Material	Packaging	Varistor Voltage
	A B C	Blank: Standard L: Low Capacitance (1E only)	1H: 0201 1E: 0402 1J: 0603 2A: 0805 2B: 1206 2E: 1210 2J: 1812 2L: 2220	T: Sn	TBM: 2mm press paper (1H: 15,000 pieces/reel) TP: 2mm pitch paper (1E: 10,000 pieces/reel) TE: 7" embossed plastic (1J, 2A, 2B: 2,500 pieces/reel; 2J, 2L: 1,000 pieces/reel; 2E: 2,000 pieces/reel)	8.2V 8.2 18V 18

For further information on packaging, please refer to Appendix A.

### applications and ratings

Part Designation	Varistor Voltage V <sub>1mA</sub> (V)	Varistor Voltage Tolerance (V)	Maximum Allowable Voltage d.c. (V)	Clamping Voltage I <sub>c</sub> =1A (V) 8/20μs	Maximum Energy (J) 10/1000μs	Maximum Peak Current (A) 2 times 8/20μs	Capacitance (Typ) 1kHz (pF)	Operating Temp. (°C)	Storage Temp. (°C)
NV73A1HTTBM12	12	10 - 15.6	6.5	35	0.01	1	33	-40°C to +85°C	-40°C to +125°C
NV73A1ETTP8	8	6.4 - 9.6	5.5	20	0.05	20	480		
NV73A1ETTP18	18	16.2 - 19.8	14.0	35			160		
NV73AL1ETTP12	12	10 - 14	5.5	30	0.03	5	50		
NV73AL1ETTP21	21	18 - 24	14.0	50			50		
NV73AL1ETTP28	28	24 - 32	18.0	65	0.005	2	15		
NV73AL1ETTP120	120	90 - 150		350 (1C=0.5A)			0.5		

Part Designation	Varistor Voltage V <sub>c</sub>	Maximum Allowable Voltage		Clamping Voltage		Maximum Energy E (J)	Maximum Peak Current I <sub>p</sub> (A) (2 times)	Operating Temp. T <sub>opt</sub> (°C)	Storage Temp. T <sub>stg</sub> (°C)
	I <sub>c</sub> = 1mA (V)	a.c rms (V)	d.c (V)	V <sub>1A</sub>	V <sub>2A</sub>				
NV73A1JTTE8.2	6.8 - 9.8	4.2	6.0	—	21	0.1	30	-40°C to +85°C	-40°C to +125°C
NV73A1JTTE12	10 - 14.4	6.1	8.6	—	29				
NV73A1JTTE15	12.5 - 18	7.6	10.8	—	35				
NV73A1JTTE18	16 - 20	9.1	12.8	—	37				
NV73A1JTTE20	18 - 22	10.6	15.0	—	40				
NV73A1JTTE22	19 - 24	12.0	16.5	—	42				
NV73A1JTTE24	21.8 - 26.5	14.0	18.0	—	46				
NV73A1JTTE27	25 - 32	17.0	22.0	—	49				
NV73A2ATTE8.2	6.8 - 9.8	4.2	6.0	18	—	0.01	10		
NV73A2ATTE12	10 - 14.4	6.1	8.6	24	—	0.03	20		
NV73A2ATTE15	12.5 - 18	7.6	10.8	29	—	0.04			
NV73A2ATTE18	16 - 20	9.1	12.8	29	—				
NV73A2ATTE20	18 - 22	10.6	15.0	33	—	0.05			
NV73A2ATTE22	19 - 24	12.0	16.5	39	—				
NV73A2ATTE24	21.8 - 26.5	14.0	18.0	42	—	0.06			
NV73A2ATTE27	25 - 32	17.0	22.0	50	—	0.07			
NV73A2ATTE33	30 - 39	20.0	26.0	60	—	0.12			
NV73A2ATTE39	37 - 47	25.0	31.0	72	—	0.14	25		
NV73A2ATTE47	45 - 54	30.0	38.0	86	—	0.16			
NV73B2ATTE8.2	6.8 - 9.8	4.2	6.0	—	18	0.03	35		
NV73B2ATTE12	10 - 14.4	6.1	8.6	—	24	0.05			
NV73B2ATTE15	12.5 - 18	7.6	10.8	—	30	0.07			
NV73B2ATTE18	16 - 20	9.1	12.8	—	32	0.08			
NV73B2ATTE20	18 - 22	10.6	15.0	—	36	0.09			
NV73B2ATTE22	19 - 24	12.0	16.5	—	40	0.11			
NV73B2ATTE24	21.8 - 26.5	14.0	18.0	—	42	0.12			
NV73B2ATTE27	25 - 32	17.0	22.0	—	58	0.24			
NV73B2ATTE33	30 - 39	20.0	26.0	—	66	0.25	50		
NV73C2ATTE8.2	6.8 - 9.8	4.2	6.0	—	18	0.04	50		
NV73C2ATTE12	10 - 14.4	6.1	8.6	—	24	0.09			
NV73C2ATTE15	12.5 - 18	7.6	10.8	—	29	0.11			
NV73C2ATTE18	16 - 20	9.1	12.8	—	32	0.13			
NV73C2ATTE20	18 - 22	10.6	15.0	—	35	0.14			
NV73C2ATTE22	19 - 24	12.0	16.5	—	40	0.17			
NV73C2ATTE24	21.8 - 26.5	14.0	18.0	—	42	0.18			
NV73A2BTTE27	25 - 32	17.0	22.0	—	55	0.13		40	
NV73A2BTTE33	30 - 39	20.0	26.0	—	60	0.15			
NV73A2BTTE39	37 - 47	25.0	31.0	—	72	0.18			
NV73A2BTTE47	45 - 54	30.0	38.0	—	85	0.22			
NV73A2BTTE56	52 - 62	35.0	45.0	—	100	0.26			

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/24/14



KOA SPEER ELECTRONICS, INC.

NV73

metal oxide varistor

applications and ratings (continued)

Part Designation	Varistor Voltage Vc	Maximum Allowable Voltage		Clamping Voltage		Maximum Energy E (J)	Maximum Peak Current Ip (A) (2 times)	Operating Temp. T <sub>opt</sub> (°C)	Storage Temp. T <sub>stg</sub> (°C)		
	Ic = 1mA (V)	a.c rms (V)	d.c (V)	V1A	V2A						
NV73B2BTTE8.2	6.8 - 9.8	4.2	6.0	—	18	0.03	50	-40°C to +85°C	-40°C to +125°C		
NV73B2BTTE12	10 - 14.4	6.1	8.6	—	24	0.07					
NV73B2BTTE15	12.5 - 18	7.6	10.8	—	29	0.09					
NV73B2BTTE18	16 - 20	9.1	12.8	—	32	0.1					
NV73B2BTTE20	18 - 22	10.6	15.0	—	35	0.11					
NV73B2BTTE22	19 - 24	12.0	16.5	—	40	0.12					
NV73B2BTTE24	21.8 - 26.5	14.0	18.0	—	42	0.14					
NV73B2BTTE27	25 - 32	17.0	22.0	—	52	0.16					
NV73C2BTTE8.2	6.8 - 9.8	4.2	6.0	—	18	0.06	40			-40°C to +85°C	-40°C to +125°C
NV73C2BTTE12	10 - 14.4	6.1	8.6	—	24	0.1					
NV73C2BTTE15	12.5 - 18	7.6	10.8	—	29	0.13					
NV73C2BTTE18	16 - 20	9.1	12.8	—	29	0.15					
NV73C2BTTE20	18 - 22	10.6	15.0	—	31	0.17					
NV73C2BTTE22	19 - 24	12.0	16.5	—	35	0.19					
NV73C2BTTE24	21.8 - 26.5	14.0	18.0	—	38	0.2					
NV73C2BTTE27	25 - 32	17.0	22.0	—	48	0.24					

Part Designation	Varistor Voltage Vc	Maximum Allowable Voltage		Clamping Voltage			Maximum Energy E (J)	Maximum Peak Current Ip (A) (2 times)	Operating Temp. T <sub>opt</sub> (°C)	Storage Temp. T <sub>stg</sub> (°C)
	Ic = 1mA (V)	a.c rms (V)	d.c (V)	V2.5A	V5A	V10A				
NV73A2ETTE15	12.8 - 17.3	8.0	11.0	30	—	—	1.0	400	-50°C to +125°C	-50°C to +150°C
NV73A2ETTE18	15.3 - 20.7	11.0	14.0	34	—	—	1.2			
NV73A2ETTE22	19.8 - 24.2	12.0	16.5	39	—	—	1.4			
NV73A2ETTE24	21.6 - 26.4	14.0	18.0	39	—	—	1.4			
NV73A2ETTE27	24.3 - 29.7	17.0	22.0	44	—	—	1.7			
NV73A2ETTE33	29.7 - 36.3	20.0	26.0	54	—	—	1.9			
NV73A2ETTE39	35.1 - 42.9	25.0	30.0	65	—	—	1.7			
NV73A2ETTE47	42.3 - 51.7	30.0	38.0	77	—	—	2.0			
NV73A2ETTE56	50.4 - 61.6	35.0	45.0	90	—	—	2.0			
NV73A2ETTE82	73.8 - 90.2	50.0	65.0	135	—	—	1.2	250		
NV73A2ETTE100	90.0 - 110.0	60.0	85.0	165	—	—	1.4	200		
NV73A2ETTE110	99.0 - 121.0	70.0	90.0	180	—	—	1.4			
NV73A2JTTE12	10.2 - 13.8	6.0	9.0	—	27	—	0.9	500		
NV73A2JTTE15	12.8 - 17.3	8.0	11.0	—	32	—	1.2			
NV73A2JTTE18	16.2 - 19.8	11.0	14.0	—	35	—	1.4			
NV73A2JTTE22	19.8 - 24.2	12.0	16.5	—	41	—	1.6			
NV73A2JTTE24	21.6 - 26.4	14.0	18.0	—	44	—	1.7			
NV73A2JTTE27	24.3 - 29.7	17.0	22.0	—	49	—	2.0			
NV73A2JTTE33	29.7 - 36.3	20.0	26.0	—	54	—	2.5			
NV73A2JTTE39	35.1 - 42.9	25.0	30.0	—	65	—	2.9			
NV73A2JTTE47	42.3 - 51.7	30.0	38.0	—	77	—	3.5			
NV73A2JTTE56	50.4 - 61.6	35.0	45.0	—	90	—	4.2			
NV73A2JTTE68	61.2 - 74.8	40.0	56.0	—	110	—	4.8			
NV73A2JTTE82	73.8 - 90.2	50.0	65.0	—	135	—	4.5			
NV73A2JTTE100	90 - 110	60.0	85.0	—	165	—	5.8		400	
NV73A2JTTE110	99 - 121	70.0	90.0	—	180	—	5.8			
NV73A2JTTE150	135 - 165	95.0	127.0	—	248	—	5.8		300	
NV73B2JTTE15	12.8 - 17.3	8.0	11.0	—	32	—	1.8	800		
NV73B2JTTE18	15.3 - 20.7	11.0	14.0	—	35	—	1.9			
NV73B2JTTE22	19.8 - 24.2	12.0	16.5	—	41	—	2.3			
NV73B2JTTE24	21.6 - 26.4	14.0	18.0	—	44	—	2.3			
NV73B2JTTE27	24.3 - 29.7	17.0	22.0	—	49	—	2.7			
NV73B2JTTE33	29.7 - 36.3	20.0	26.0	—	54	—	3.0			

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/24/14

circuit protection

**applications and ratings (continued)**

Part Designation	Varistor Voltage Vc	Maximum Allowable Voltage		Clamping Voltage			Maximum Energy E (J)	Maximum Peak Current Ip (A) (2 times)	Operating Temp. T <sub>opt</sub> (°C)	Storage Temp. T <sub>stg</sub> (°C)	
		Ic = 1mA (V)	a.c rms (V)	d.c (V)	V <sub>2.5A</sub>	V <sub>5A</sub>					V <sub>10A</sub>
NV73B2JTTE39	35.1 - 42.9	25.0	30.0	—	65	—	3.7	800	-50°C to +125°C	-50°C to +150°C	
NV73B2JTTE47	42.3 - 51.7	30.0	38.0	—	77	—	4.2				
NV73B2JTTE56	50.4 - 61.6	35.0	45.0	—	90	—	4.2				
NV73A2LTTE12	10.2 - 13.8	6.0	9.0	—	—	28	1.9	1000			
NV73A2LTTE15	12.8 - 17.3	8.0	11.0	—	—	33	2.3				
NV73A2LTTE18	16.2 - 19.8	11.0	14.0	—	—	36	2.7				
NV73A2LTTE22	19.8 - 24.2	12.0	16.5	—	—	41	2.9				
NV73A2LTTE24	21.6 - 26.4	14.0	18.0	—	—	45	3.1				
NV73A2LTTE27	24.3 - 29.7	17.0	22.0	—	—	48	3.8				
NV73A2LTTE33	29.7 - 36.3	20.0	26.0	—	—	57	4.3				
NV73A2LTTE39	35.1 - 42.9	25.0	30.0	—	—	65	5.5				
NV73A2LTTE47	42.3 - 51.7	30.0	38.0	—	—	77	6.3				
NV73A2LTTE56	50.4 - 61.6	35.0	45.0	—	—	90	7.7				
NV73A2LTTE68	61.2 - 74.8	40.0	56.0	—	—	110	8.8				
NV73A2LTTE100	90 - 110	60.0	85.0	—	—	165	6.8				
NV73A2LTTE110	99 - 121	70.0	90.0	—	—	180	6.8				
NV73B2LTTE15	12.8 - 17.3	8.0	11.0	—	—	33	4.2				1200
NV73B2LTTE18	15.3 - 20.7	11.0	14.0	—	—	36	5.4				
NV73B2LTTE22	19.8 - 24.2	12.0	16.5	—	—	41	5.8				
NV73B2LTTE24	21.6 - 26.4	14.0	18.0	—	—	45	5.8				
NV73B2LTTE27	24.3 - 29.7	17.0	22.0	—	—	48	7.2				
NV73B2LTTE33	29.7 - 36.3	20.0	26.0	—	—	57	7.8				
NV73B2LTTE39	35.1 - 42.9	25.0	30.0	—	—	65	9.6				
NV73B2LTTE47	42.3 - 51.7	30.0	38.0	—	—	77	12.0				
NV73B2LTTE56	50.4 - 61.6	35.0	45.0	—	—	90	7.7				
NV73B2LTTE82	73.8 - 90.2	50.0	65.0	—	—	135	5.6	1000			
NV73C2LTTE39	35.1 - 42.9	25.0	30.0	—	—	65	5.6 (1 time)	2500 (1 time)			
NV73C2LTTE82	73.8 - 90.2	50.0	65.0	—	—	135	14 (1 time)	4500 (1 time)			

Maximum allowable voltage - the maximum sinusoidal RMS voltage or maximum DC voltage which can be applied continuously  
 E: Maximum energy - the maximum energy within the varistor voltage change of ±10% when a single impulse of 2m sec. is applied  
 Ip: Maximum peak current - the maximum peak current within the varistor voltage change of ±10% when a single standard impulse of 8/20µ sec. is applied two times with an interval of 5 min.  
 T<sub>opt</sub>: Operating temperature - Ambient temperature range when the device is operating  
 T<sub>stg</sub>: Storage temperature - Temperature range without causing the device any failure

**environmental applications**  
**Performance Characteristics**

Parameter	Requirement Δ V±%	Test Method
Varistor Voltage	Within specified tolerance	Voltage between terminals when 1mA is flowed
Solderability	95% coverage minimum	230°C ± 5°C, 4 seconds ± 1 second; 235°C ± 5°C, 4 seconds ± 1 second***
Resistance to Solder Heat	±10%	260°C ± 5°C, 10 seconds ± 0.5 second*; 270°C ± 5°C, 3 seconds ± 0.5 second**;
Rapid Change of Temperature	±10%	260°C ± 5°C, 4 seconds ± 1 second***
Maximum Peak Current	±10%	-40°C (30 minutes), +125°C (30 minutes), 30 cycles; 5 cycles***
Maximum Energy	±10%	A single standard impulse of 8/20µ seconds, positive/negative applied once each; A single standard impulse of 8/20µ seconds, 100 pulse, 30 second interval***
High Temperature Life with d.c. Bias	±10%	A single standard impulse of 10/1000µs, once*; A single standard impulse of 2ms, once**;
Low Temperature Life with d.c. Bias***	±10%	A single standard impulse of 10/1000µs, 100pulse, 90 second interval***
High Temperature Life with a.c. Bias**	±10%	85°C ± 5°C, 1000h, Load: Maximum allowable circuit voltage (d.c.);
High Temperature & High Humidity Life with d.c. Bias	±10%	125°C ± 5°C, 1000h, Load: Maximum allowable circuit voltage (d.c.)***
Capacitance*	Typical	-50°C ± 5°C, 1000h, Load: Maximum allowable circuit voltage (d.c.)
High Temperature Storage Life	±10%	85°C ± 5°C, 1000h, Load: Maximum allowable circuit voltage (Va.c.r.m.s.)
Low Temperature Storage Life	±10%	40°C ± 5°C, 95% RH, 500h, Load: Maximum allowable voltage (d.c.)
		1kHz: Others, 1MHz: Varistor voltage 120V
		125°C ± 5°C, 1000h; 150°C ± 5°C, 1000h***
		-40°C ± 5°C, 1000h; -50°C ± 5°C, 1000h***


\* 1H, 1E \*\* 1J, 2A, 2B \*\*\* 2E, 2J, 2L

For Voltage Current Curves Graphs see Environmental Applications. Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)  
 Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. 11/06/18


**environmental applications** (continued)

**Voltage-Current Curves (Ta = 25°C)**


**NV73A 1E**

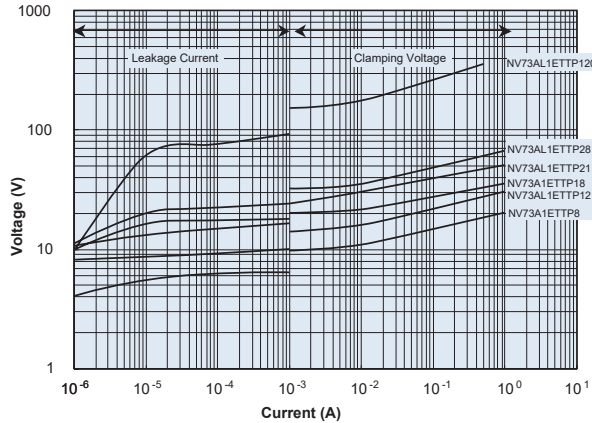


**NV73A 1J**

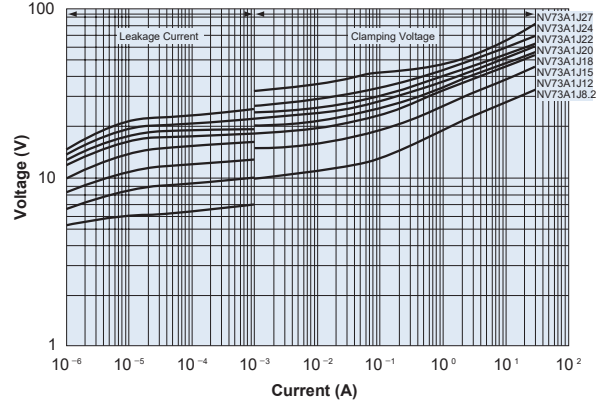


**NV73A 2A**

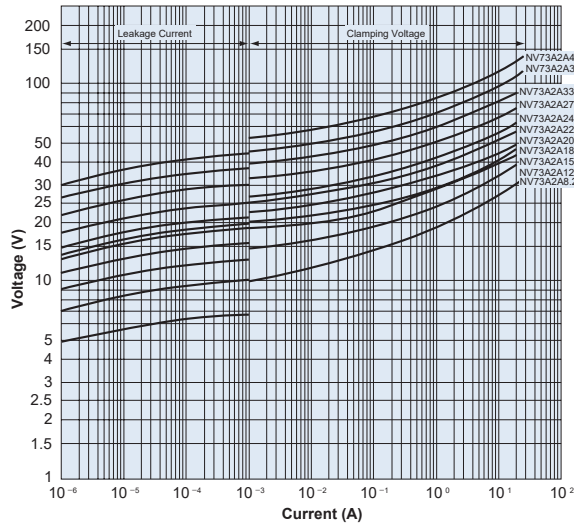


**NV73B 2A**

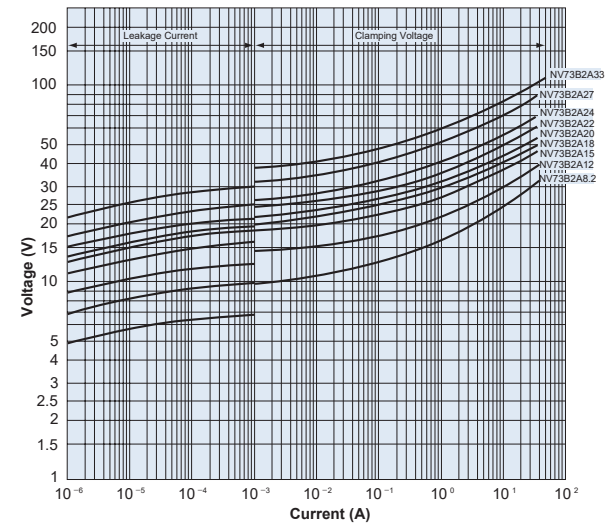

**NV73C 2A**

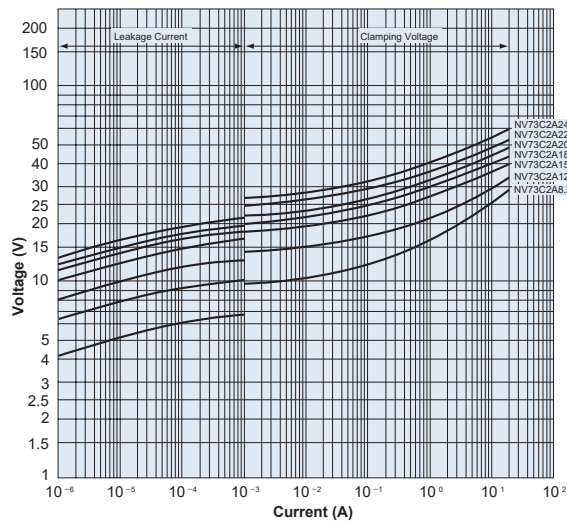

**NV73A 2B**

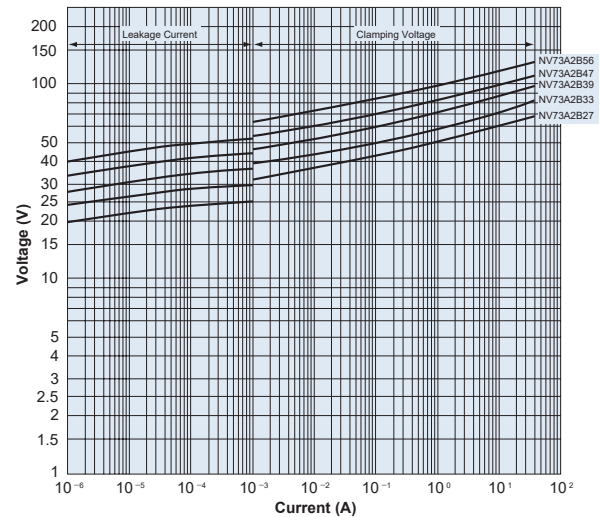

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


12/08/16




**environmental applications** (continued)

**Voltage-Current Curves (Ta = 25°C)**


**NV73B 2B**

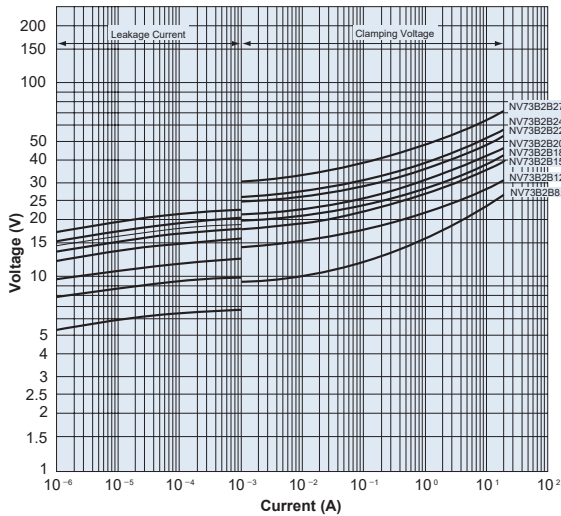


**NV73C 2B**

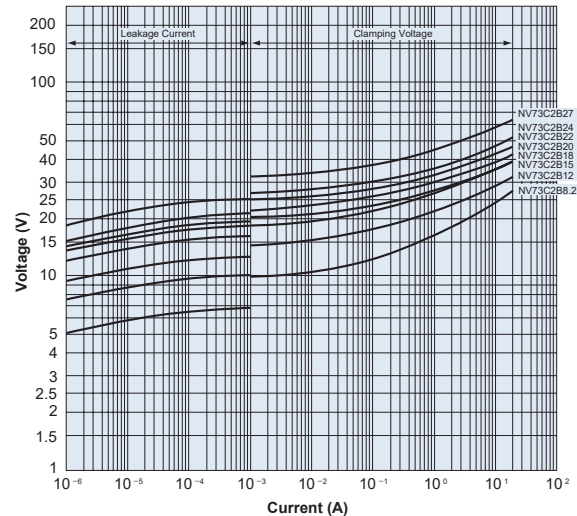


**NV73 2E**

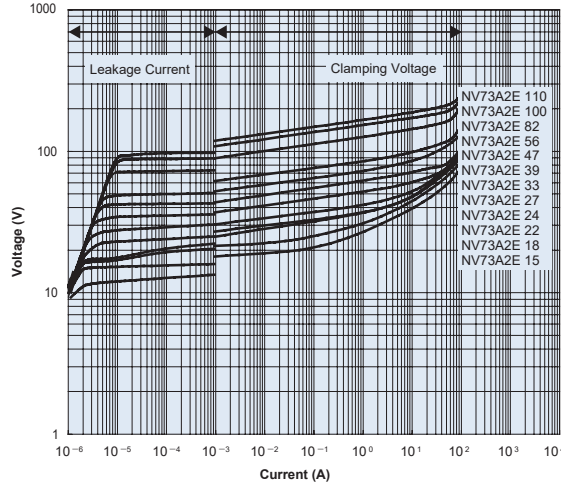

**NV73 2J**

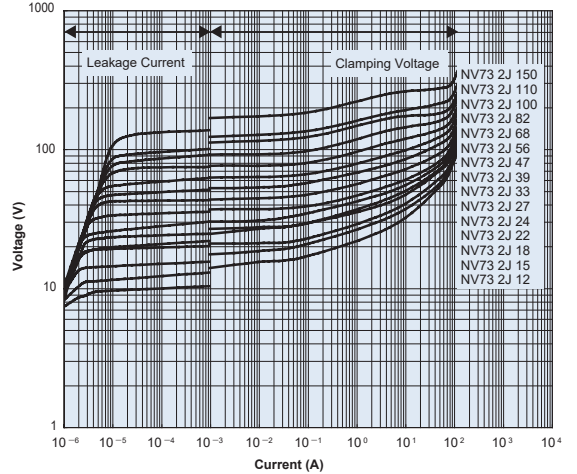


**NV73 2L**

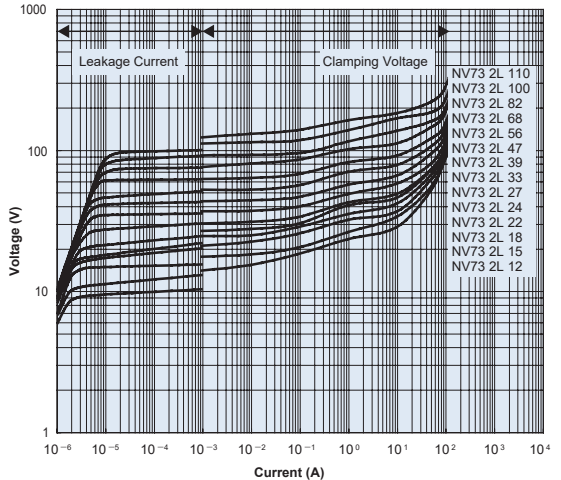

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/08/16




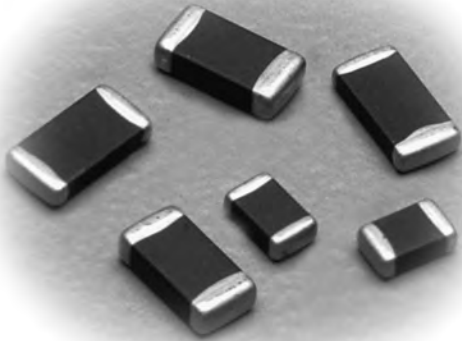

## features

- SMD type metal oxide varistors
- Ideal for countermeasures against ESD (Conforming to IEC61000-4-2)
- High maximum energy type
- Low leakage current
- High resistance to cyclic temperature stress
- Suitable for both flow and reflow soldering
- Products with lead-free terminations meet EU RoHS requirements. Pb located in glass material, electrode and varistor element is exempt per Annex 1, exemption 5 of EU directive 2005/95/EC.
- AEC-Q200 Qualified

## dimensions and construction

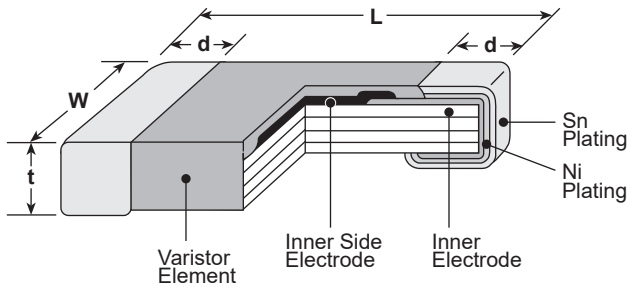

Type (Inch Size Code)	Dimensions inches (mm)			
	L	W	t	d
<b>1J (0603)</b>	.063±.006 (1.6±0.15)	.031±.006 (0.8±0.15)	.039 max. (1.0 max.)	.016±.006 (0.4±0.15)
<b>2A (0805)</b>	.079±.010 (2.0±0.25)	.049±.008 (1.25±0.2)	.051 max. (1.30 max.)	.020±.010 (0.5±0.25)
<b>2B (1206)</b>	.126±.012 (3.2±0.3)	.063±.012 (1.6±0.3)	.057 max. (1.45 max.)	.022±.012 (0.55±0.3)

## ordering information

<b>NV73</b>	<b>DL</b>	<b>2A</b>	<b>T</b>	<b>TE</b>	<b>27</b>
Type	Energy Code	Size	Termination Material	Packaging	Varistor Voltage
		1J: 1.6 x 0.08 2A: 2.0 x 1.2 2B: 3.2 x 1.6	T: Sn	TE: 7" embossed plastic	

## applications and ratings

Part Designation	Varistor Voltage (V) $V_{1mA}$	Maximum Allowable Voltage		Maximum Clamping Voltage (V)		Maximum Energy (J)	Maximum Peak Current 8/20 $\mu$ s (A) 1 time	Short-Time Applied Voltage (5 min) ( $V_{DC}$ )	Capacitance (Typ) 1kHz (pF)
		A.C. ( $V_{r.m.s.}$ )	D.C. (V)	$V_{1A}$	$V_{2A}$				
NV73DL1JTTE12	10~14.4	6.1	8.6	24	—	0.1	80	10	630
NV73DL1JTTE22	22~27	14	16	42	—	0.2	100	24.5	390
NV73DL1JTTE27	24~32	17	22	50	—	0.2	100	24.5	320
NV73DL1JTTE33	33~39	20	26	60	—	0.3	100	24.5	200
NV73DL1JTTE47	40~54	30	34	81	—	0.3	100	42	130
NV73DL2ATTE12	10~14.4	6.1	8.6	24	—	0.1	120	10	1070
NV73DL2ATTE22	22~27	14	16	42	—	0.3	160	24.5	610
NV73DL2ATTE27	24~32	17	22	50	—	0.3	160	24.5	580
NV73DL2ATTE33	33~39	20	26	60	—	0.3	160	24.5	380
NV73DL2ATTE47	40~54	30	34	81	—	0.3	160	42	260
NV73DL2ATTE68	62~72	45	56	108	—	0.3	160	64	190
NV73DL2ATTE82	74~90	50	65	135	—	0.3	160	75	105

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/19/17


### applications and ratings (continued)

Part Designation	Varistor Voltage (V) $V_{1mA}$	Maximum Allowable Voltage		Maximum Clamping Voltage (V)		Maximum Energy (J)	Maximum Peak Current 8/20 $\mu$ s (A) 1 time	Short-Time Applied Voltage (5 min) ( $V_{DC}$ )	Capacitance (Typ) 1kHz (pF)
		A.C. ( $V_{r.m.s.}$ )	D.C. (V)	$V_{1A}$	$V_{2A}$				
NV73DL2BTTE22	22~27	14	16	—	42	1	300	24.5	1600
NV73DL2BTTE27	24~32	17	22	—	50	1	300	24.5	1360
NV73DL2BTTE33	33~39	20	26	—	60	1	300	24.5	870
NV73DL2BTTE68	62~72	45	56	—	108	1.5	300	64	380
NV73DL2BTTE82	74~90	50	65	—	135	1.5	300	75	250

Operating temperature range: -40°C to +125°C  
Storage temperature range: -40°C to +150°C

### environmental applications

#### Voltage Current Curves (Ta = +25°C)

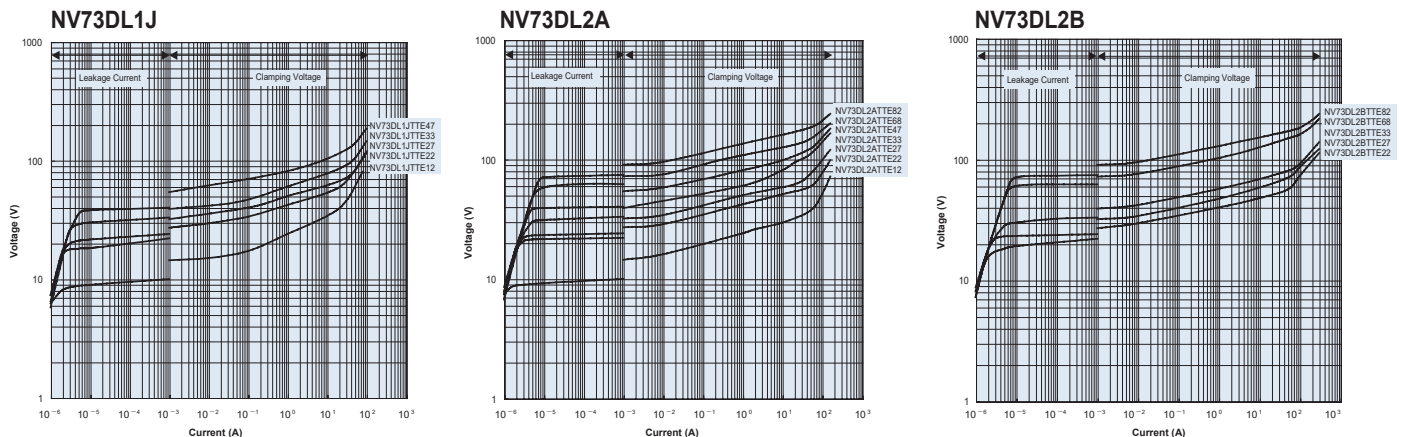


### Performance Characteristics

Parameter	Requirement $\Delta V_{1mA} \pm \%$	Test Method
Varistor Voltage	Within specified tolerance	Voltage between terminals when 1mA and 10mA are flowed
Solderability	95% coverage minimum (Ag-Pd: 75% coverage min.)	230°C $\pm$ 5°C, 5 seconds $\pm$ 0.5 second
Resistance to Solder Heat	$\pm 10\%$	260°C $\pm$ 5°C, 10 seconds $\pm$ 0.5 second
Rapid Change of Temperature	$\pm 10\%$	-40°C (30 minutes) / +125°C (30 minutes), 1000 cycles
Short-Time Applied Voltage	$\pm 10\%$	Maximum value of D.C. voltage that can be applied for a short period of time (5 min.) (NV73DL2A 12: 1 min.)
Maximum Peak Current	$\pm 10\%$	A single standard impulse current of 8/20 $\mu$ s seconds is applied
Maximum Energy	$\pm 10\%$	A single standard impulse of 2m second, once
Electrostatic Discharge	$\pm 10\%$	25kV (Non contact) (NV73DL1J12, NV73DL2A12: 15kV (Non contact))
Vibration Resistance	No visible damage. No remarkable mechanical damage	Vibration frequency: 10Hz~2000Hz; Full amplitude: 1.5mm, 10Hz~2000Hz~10Hz 20 min. XYZ direction 4 hrs for each total 12 hrs
High Temperature Life with d.c. Bias	$\pm 10\%$	125°C $\pm$ 2°C, 1000h, Applied voltage: Varistor voltage ( $V_{1mA}$ ) x 0.85
High Temperature & High Humidity Life with Bias	$\pm 10\%$	85°C $\pm$ 2°C, 85% RH, 1000h, Applied voltage: Varistor voltage ( $V_{1mA}$ ) x 0.85
Thermal Shock	$\pm 10\%$	-55°C (15 min.) / +125°C (15 min.) 300 cycles
Shock	$\pm 10\%$	Half sine wave, Applied time: 1m second, Applied cycle: 500m/s <sup>2</sup> , 5 cycles
High Temperature Storage	$\pm 10\%$	150°C, 1000h
Low Temperature Storage	$\pm 10\%$	-40°C, 1000h

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


12/12/17

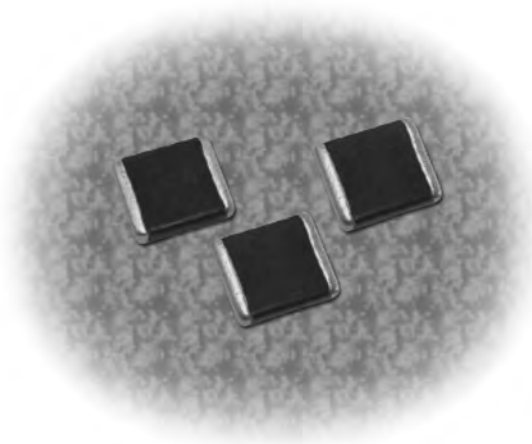

## features

- Symmetrical non-linearity V-I characteristics absorb positive and negative surge
- Suitable for protection of automotive applications from load dump surge on electronic components
- Meets JASO load dump surge test requirements
- Operating temperatures up to 125°C
- High resistance to cyclic temperature stress
- Suitable for both flow and reflow solderings
- Products meet EU RoHS requirements
- AEC-Q200 Qualified

## dimensions and construction

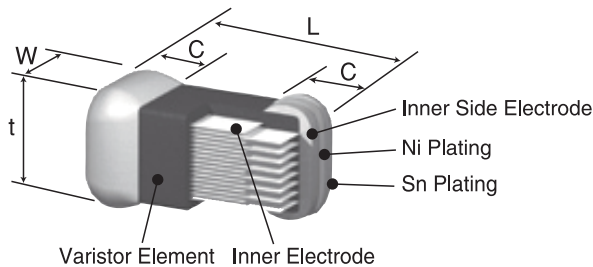

Type (Inch Size Code)	Dimensions inches (mm)			
	L	W	t	C
<b>NV73DS 2L (2420)</b>	.240±.014 (6.1±0.35)	.201±.014 (5.1±0.35)	.146 max. (3.7 max.)	.041±.008 (1.05±0.2)

## ordering information

<b>NV73</b>	<b>DS</b>	<b>2L</b>	<b>T</b>	<b>TE</b>	<b>27</b>
Type	Energy Code A B	Size 2L: 6.1 x 5.1mm	Termination Material T: Sn	Packaging TE: 7" embossed plastic	Varistor Voltage

## applications and ratings


Part Designation	Varistor Voltage (Range) (V)	Maximum Allowable Voltage		Clamping Voltage (V)	Maximum Load Dump Surge Energy	Maximum Peak Current	Short-Time Applied Voltage (5 min)
	V <sub>1mA</sub>	A.C.(V <sub>r.m.s.</sub> )	D.C.(V)	V <sub>20A</sub>	J	8/20μs (A) 1 time	(V <sub>DC</sub> )
NV73DSA2LTTE27	20~25	14	16	40	70	200	24.5
NV73DSB2LTTE27	20~25	14	16	40	63	200	24.5
NV73DSB2LTTE47	40~45	30	34	60	65	200	38

Operating temperature range: -40°C to +125°C  
Storage temperature range: -40°C to +150°C

For further information on packaging, please refer to Appendix A.

## environmental applications

### Voltage Current Curves (Ta = +25°C)

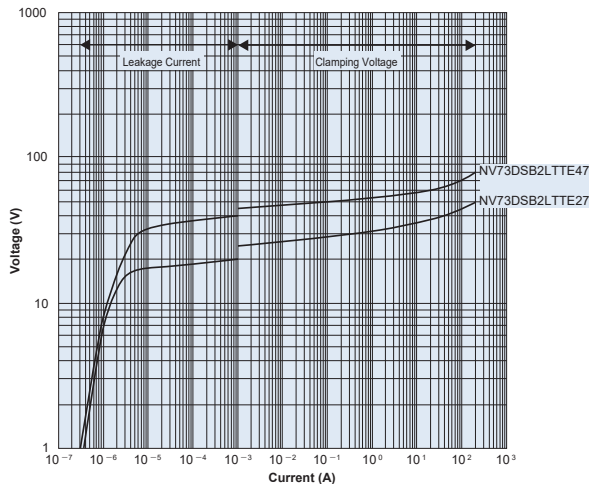


### Performance Characteristics

Parameter	Requirement $\Delta V_{1mA}$	Test Method
Varistor Voltage	Within specified tolerance	Voltage between terminals when 1mA is flowed
Resistance to Solder Heat	$\pm 10\%$	$260^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , 10 seconds $\pm 0.5$ second
Solderability	95% coverage minimum	$230^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , 5 seconds $\pm 0.5$ second
Rapid Change of Temperature	$\pm 10\%$	$-40^{\circ}\text{C}$ (30 minutes)/ $+125^{\circ}\text{C}$ (30 minutes), 1000 cycles
Short-Time Applied Voltage	$\pm 10\%$	Maximum value of D.C. voltage that can be applied for a short period of time (5 min.)
Maximum Peak Current	$\pm 10\%$	A single standard impulse current of $8/20\mu$ seconds is applied
Maximum Energy	$\pm 10\%$	A single standard impulse of 2m second, once
Electrostatic Discharge	$\pm 10\%$	25kV (Non contact)
Vibration Resistance	No visible damage. No remarkable mechanical damage	Vibration frequency: 10Hz~2000Hz; Full amplitude: 1.5mm, 10Hz~2000Hz~10Hz 20 min. XYZ direction 4 hrs for each total 12 hrs
High Temperature & High Humidity Life with Bias	$\pm 10\%$	$85^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , 85% RH, 1000h, Applied voltage: Varistor voltage ( $V_{1ma}$ ) x 0.85
High Temperature Life with d.c. Bias	$\pm 10\%$	$125^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , 1000h, Applied voltage: Varistor voltage ( $V_{1ma}$ ) x 0.85
Thermal Shock	$\pm 10\%$	$-55^{\circ}\text{C}$ (15 min.)/ $+125^{\circ}\text{C}$ (15 min.) 300 cycles
Shock	$\pm 10\%$	Half sine wave, Applied time: 1m second, Applied cycle: 500m/s <sup>2</sup> , 5 cycles
High Temperature Storage	$\pm 10\%$	$150^{\circ}\text{C}$ , 1000h
Low Temperature Storage	$\pm 10\%$	$-40^{\circ}\text{C}$ , 1000h



**construction**

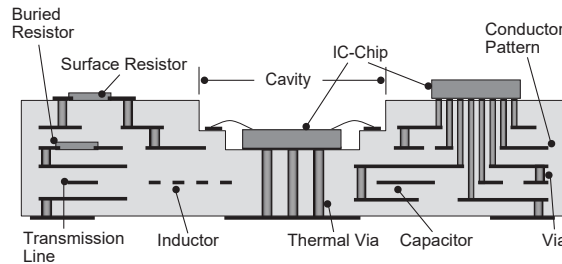

**ordering information**

New Part #	KLC	AB1
	Type	KOA Ref. Number

**features**

- KOA's substrates are suitable for bare chip mounting, as the thermal expansion coefficient is close to silicon's one and outstanding dimensional accuracy and flatness.
- Thanks to our low dielectric ceramics and low resistive conductors, the substrates excel in the high frequency characteristics
- Minutuarization and high integration are possible because of multilayer wiring, multi-cavity structure and the surface/buried printing resistors possibilities
- Special shapes of substrate and cavity such as circle shape, polygonal shape and concave or convex shape are available
- Thermal vias under bare chips can be implemented to improve the thermal conductivity of the substrate
- The substrates are outstanding in heat resistance and humidity resistance. There will be no outgas occurrence from the ceramics.
- Products meet EU RoHS requirements

**what is LTCC ?**

LTCC stands for Low Temperature Co-fired Ceramics. KOA's LTCC are multilayer ceramic substrates. This technology permits to use low resistive material as conductor patterns due to the lower temperature needed during firing process compared to general ceramic firing process. This is achieved by adding glass to alumina. KOA uses Silver based paste (Ag) to create the electrical structures in and on the ceramics layers. To be noted, that top and bottom layers patterns can be plated using various processes. Thanks to these materials, low loss electrical performance can be achieved as well as high dimensional accuracy. KOA's LTCC provides clear advantages for system downsizing by forming surface resistors, inner resistors, and transmission lines on/ in the substrate. In addition, our thermal expansion coefficient is close to silicon's one, enhancing the reliability of mounted bare chip. Furthermore, cavity structures can be formed, making possible the creation of low profile packages.

substrates & others


## environmental applications

### Characteristics of Substrate Material





Parameter	Characteristics
Bending Strength (MPa)	250
Thermal Expansion Coefficient ( $\times 10^{-6}/K$ )	5.5
Thermal Conductivity (W/m · K)	3
Insulation Resistance ( $\Omega \cdot \text{cm}$ )	$>10^{13}$
Dielectric Constant at 1GHz	6.6
Dielectric Loss at 1GHz	$<0.004$
Resistivity of Buried Conductor ( $\mu\Omega \cdot \text{cm}$ )	Ag 2.5
Density ( $\text{g}/\text{cm}^3$ )	2.8
Surface Roughness Ra ( $\mu\text{m}$ )	$<0.4$
Withstanding Voltage (kV/mm)	$>15$
Layer Thickness ( $\mu\text{m}/\text{Layer}$ )	80, 100, 125 Standard

Symbol	Parameter	Design Value
A	Line Width	0.06mm Min.
B	Line to Line Spacing	0.06mm Min.
C	Via Diameter	0.1mm, 0.15mm, 0.2mm
D	Via Pad Diameter	Via diameter +0.05mm Min.
E	Via to Via Spacing	0.2mm Min.
F	Via pad to Line Spacing	0.125mm Min.
G	Part Edge to Conductor Spacing	0.2mm Min.
H	Part Edge to Via Spacing	0.3mm Min.
J1, J2	Cavity Width	0.6mm Min.
K1, K2	Cavity Depth	0.1mm Min.
L	Wall Width of Cavity	0.5mm Min.
M	Shelf Width in the Cavity	0.5mm Min.

Surface layer - Inner layer

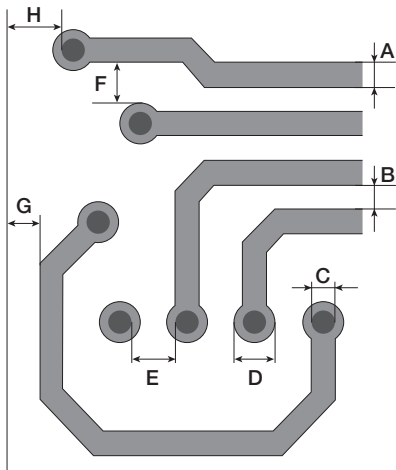

Cavity

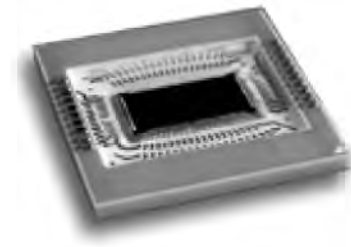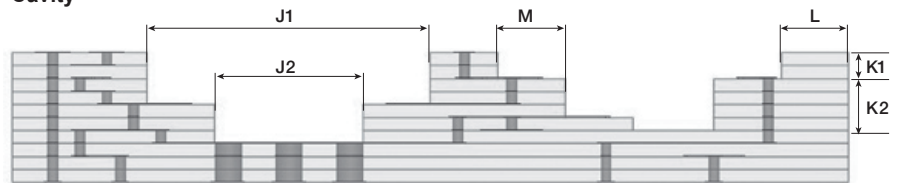





## features

- Adjustment processes are decreased by function and ratio trimmings
- High density mounting by bonding (COB)
- Various types of package are available
- High reliability achieved by KOAs original thick film technology
- Thick film printed circuit substrate applies the non-noble metal paste (conductive paste and resistive paste) and receives the many total inquires including material selecting, pattern designing and mass production


## ordering information

<b>KA</b>	<b>7777</b>	<b>D</b>
<b>Product Code</b>	<b>KOA Ref. Number</b>	<b>Terminal Surface Material</b>
KA: Hybrid IC		D: SnAgCu T: Sn

## Component - KA Series

Substrate Materials	Item	Printing	Mounting	Bonding
	Al <sub>2</sub> O <sub>3</sub> Alumina	o	o	o
	Glass epoxy	x	o	o
Conductors, Resistors	Item	Ag-Pd	Ag-Pt	
	Conductor resistance	18mΩ/□/15μm	5mΩ/□/10μm	
	Heat shock	-55°C~+125°C 300 Cycles	-55°C~+125°C 500 Cycles	
	RuO <sub>2</sub>	5Ω~10MΩ ±100x10 <sup>-6</sup> /K		
Mounting	Item	Specifications		
	COB	Au Wire, Al Wire		
	BGA	0.5mm Pitch~		
	QFP	0.4mm Pitch~		
	Chip	0.4mm x 0.2mm		
Package, Outside Terminals	Package	Lead Pitch		
	SIP	1.8mm, 2.0mm, 2.5mm, 2.54mm		
	DIP, SOP	1.27mm, 1.8mm, 2.54mm		
	ZIP	2.54mm		
	BGA, LGA	1.0mm~		
Over Coating, Plating	Over Coating	Color	UL Standard	
	Epoxy metamorphic phenol	Black	94 V0 Approved	
	Epoxy	Black	94 V1 Approved	


o= Available    x= Not available

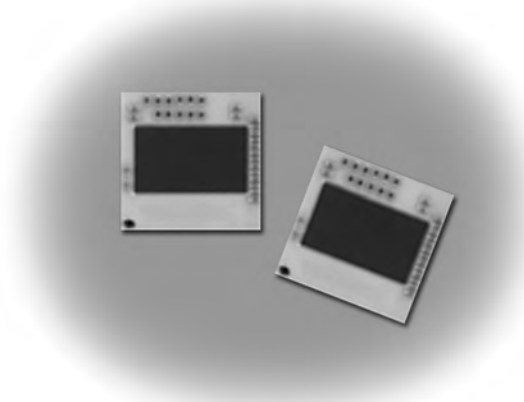

### features

- SMD (Hybrid IC)
- Plural semiconductors in one package offers downsized system with high performance and standardization
- Wiring space saving by multilayer fine patterns on build-up substrate. No signal delay by shortened wiring distance
- High precision modules by function trimming
- Less mounting problem because of the decreasing number of the terminals

### construction

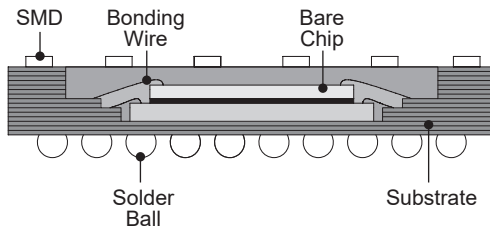

### Package Specifications

Item	Content
Terminal Pitch	0.8mm~
Mountable Device	<ul style="list-style-type: none"> <li>• SMD</li> <li>• Bare Chip</li> <li>• Printed Resistor (Trimable)</li> </ul>
Package	<ul style="list-style-type: none"> <li>• SON</li> <li>• BGA</li> <li>• LGA</li> </ul>
Substrate for Package	<ul style="list-style-type: none"> <li>• FR-4</li> <li>• FR-5</li> <li>• Alumina</li> <li>• LTCC</li> </ul>


### Mounting Specifications

Item	Unit	Min.	Std.	Max.	Note
Substrate Dimension	mm	50 x 20	120 x 100	320 x 140	
Substrate Thickness	mm	0.3	—	1.6	
Bare Chip Pad Pitch	μm	100	—	—	
Bare Chip Pad Dimension	μm	70	—	—	
Bare Chip Thickness	mm	0.1	0.2	—	
Molding Height	mm	0.3	1.0	1.2	Height from chip surface
Wire Length	mm	0.3	—	3.0	
Wire Loop Height	μm	100	200	—	
Wire Diameter	Al	200	300	500	for Power Module
	Au	20	25	40	
Plating	Electrical/nonelectrical Au Plating				
Substrate	<ul style="list-style-type: none"> <li>• FR-4</li> <li>• FR-5</li> <li>• Alumina</li> <li>• LTCC</li> <li>• FPC</li> </ul>				

## features

- Surface-mountable chip type test terminal
- Automatic machine insertable
- Suitable for reflow and wave soldering
- Available in three standard sizes: 0603, 0805 or 1206
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- AEC-Q200 Qualified (RCU only)

## dimensions and construction

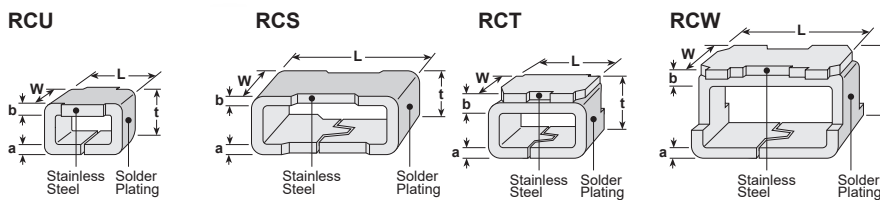

Note: Top surfaces of RCT and RCW are not solderable.

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	t	a	b
<b>RCU (0603)</b>	.063 (1.6)	.031 (0.8)	.045 (1.15)	.009 (0.23)	.009 (0.23)
<b>RCT (0805)</b>	.079 (2.0)	.049 (1.25)	.057 (1.45)	.009 (0.23)	.018 (0.45)
<b>RCS (1206)</b>	.126 (3.2)	.063 (1.6)	.049 (1.25)	.009 (0.23)	.009 (0.23)
<b>RCW (1206)</b>			.079 (2.0)	.009 (0.23)	.018 (0.45)

## ordering information

<b>RCU</b>	<b>C</b>	<b>TE</b>
<b>Type</b>	<b>Termination Material</b>	<b>Packaging</b>
RCU RCT RCS RCW	C: SnCu	TE: 7" embossed plastic (2,000 pieces/reel) TED: 10" embossed plastic (5,000 pieces/reel) RCW not available in TED

For further information on packaging, please refer to Appendix A.

## applications and ratings

Part Designation	Rated Current	Standard Resistance	Rated Ambient Temperature	Operating Temperature Range
RCU	2 Amps	50mΩ or less	+70°C	-55°C to +125°C
RCT				
RCS				
RCW				

## environmental applications

### Performance Characteristics

Parameter	Requirement Real R		Test Method
	Limit	Typical	
Resistance	50mΩ Max. after the test	10mΩ Max. after the test	25°C
Resistance to Solder Heat			260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature			-55°C (30 minutes), +125°C (30 minutes), 100 cycles
High Temperature Exposure			+125°C, 240 hours

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


1/06/14

For Product Specific packaging, please refer to the individual product data sheets.

Type		Component Size (mm)			Carrier Tape	Quantity/ Reel (Pieces)	Taping (mm)					Reel Size øa (mm)
		L	W	T			A	B	W	P1	T1	
HRK73 HV73	1F	0.4	0.2	0.12	TX	40000	0.25±0.04	0.45±0.04	4.0±0.2	1.0±0.05	0.40±0.1	180
					TBL	20000	0.25±0.04	0.45±0.04	8.0±0.2	2±0.05	0.31+0.2/-0	178
HV73-RT HV73V	1H	0.6	0.3	0.23	TC/TCM	10000/15000	0.37±0.05	0.67±0.05	8.0±0.2	2±0.05	0.42±0.1	178
					TCD	20000	0.37±0.05	0.67±0.05	8.0±0.2	2±0.05	0.42+0.2/-0	255
HV73V-RT LT73 LT73V RF73	1E	1	0.5	0.35	TPL*	20000	0.65±0.1	1.15±0.1	8.0±0.2	2±0.05	0.42+0.2/-0	178
					TPD	20000	0.65±0.1	1.15±0.1	8.0±0.2	2±0.05	0.42+0.2/-0	255
RK73-RT RK73B RK73G	1J	1.6	0.8	0.45	TP	10000	0.65±0.1	1.15±0.1	8.0±0.2	2±0.05	0.42+0.2/-0	178
					TP	10000	1.1±0.1	1.9±0.1	8.0±0.2	2±0.05	0.6+0.2/-0	178
RK73G-RT RK73F RK73H RK73Z RN73H RN73R RS73	2A	2	1.25	0.5	TD	5000	1.1±0.08	1.9±0.1	8.0±0.2	4.0±0.1	0.6+0.2/-0	178
					TDD	10000	1.1±0.1	1.9±0.1	8.0±0.2	4.0±0.1	0.6+0.2/-0	255
RS73-RT SG73 SG73-RT SG73G SG73P SG73S	2B	3.2	1.6	0.6	TP	10000	1.65±0.2	2.4±0.2	8.0±0.2	2±0.05	0.75+0.2/-0	178
					TD	5000	1.65±0.2	2.4±0.2	8.0±0.2	4.0±0.1	0.75+0.2/-0	178
SR73 SR73-RT UR73/V	2E	3.2	2.6	0.6	TE	4000	1.6±0.2	2.4±0.2	8.0±0.2	4.0±0.1	0.9±0.1	178
					TDD	10000	1.65±0.1	2.4±0.1	8.0±0.2	4.0±0.1	0.75+0.2/-0	255
SR73 SR73-RT UR73/V	2H/W2H	5	2.5	0.6	TED	10000	1.45±0.15	2.4±0.2	8.0±0.2	4.0±0.1	0.65±0.1	255
					TD	5000	2.0±0.2	3.5±0.2	8.0±0.2	4.0±0.1	0.75+0.2/-0	178
SR73 SR73-RT UR73/V	3A/W3A/ 3A2/W3A2	6.3	3.1	0.6	TE	4000	1.9±0.2	3.5±0.2	8.0±0.2	4.0±0.1	1.0±0.1	178
					TDD	10000	1.9±0.1	3.5±0.1	8.0±0.2	4.0±0.1	0.75+0.2/-0	255
XR73B XR73H XR73Z	1H	0.6	0.3	0.13	TE	10000	1.9±0.2	3.5±0.1	8.0±0.2	4.0±0.1	1.0±0.1	255
					TD	5000	2.85±0.2	3.5±0.2	8.0±0.2	4.0±0.1	0.75+0.2/-0	178
WK73 WK73-RT WU73 WG73	2A	1.25	2.0	0.5	TE	4000	2.85±0.2	3.5±0.2	8.0±0.2	4.0±0.1	1.0±0.15	178
					TDD	10000	2.8±0.1	3.5±0.1	8.0±0.2	4.0±0.1	0.75+0.2/-0	255
SL SLW	1, W1	6.3	3.1	1.9	TE	1000	2.9±0.15	3.6±0.15	8.0±0.2	4.0±0.1	1.0±0.1	255
					TD	5000	2.9±0.2	5.35±0.2	12.0+0.3/-0.1	4.0±0.1	1.0±0.15	178
TLRH	2A	2.0	1.25	0.25	TE	1000	2.9±0.2	5.35±0.2	12.0+0.3/-0.1	4.0±0.1	1.0±0.15	178
					TD	5000	2.9±0.2	5.4±0.2	12.0+0.3/-0.1	4.0±0.1	0.85±0.1	255
TLR	2A	2.0	1.25	0.25	TE	1000	3.44±0.2	6.65±0.2	12.0+0.3/-0.1	4.0±0.1	1.0±0.15	178
					TD	5000	3.6±0.2	6.9±0.2	12.0+0.3/-0.1	4.0±0.1	0.85±0.1	255
TLRZ	1E	1.0	0.5	0.4	TE	2000	3.44±0.2	6.65±0.2	12.0+0.3/-0.1	4.0±0.1	1.0±0.15	178
					TD	5000	3.44±0.2	6.65±0.2	12.0+0.3/-0.1	4.0±0.1	1.0±0.15	178
TLRZ	1J	1.6	0.8	0.5	TE	2000	3.44±0.2	6.65±0.2	12.0+0.3/-0.1	4.0±0.1	1.0±0.15	178
					TD	5000	3.44±0.2	6.65±0.2	12.0+0.3/-0.1	4.0±0.1	1.0±0.15	178
TLRZ	2A	2.0	1.25	0.5	TE	2000	3.44±0.2	6.65±0.2	12.0+0.3/-0.1	4.0±0.1	1.0±0.15	178
					TD	5000	3.44±0.2	6.65±0.2	12.0+0.3/-0.1	4.0±0.1	1.0±0.15	178
TLRZ	2B	3.2	1.6	0.5	TE	2000	3.44±0.2	6.65±0.2	12.0+0.3/-0.1	4.0±0.1	1.0±0.15	178
					TD	5000	3.44±0.2	6.65±0.2	12.0+0.3/-0.1	4.0±0.1	1.0±0.15	178

\* TPL not available for RN73 and RN73H \*\*WK73 only

### Packaging specifications

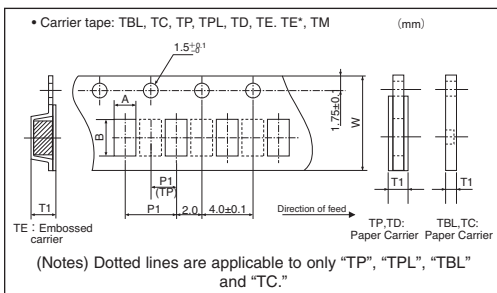

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

2/07/19

For Product Specific packaging, please refer to the individual product data sheets.

Type	Component Size (mm)			Carrier Tape	Quantity/ Reel (Pieces)	Taping (mm)					Reel Size øa (mm)	
	L	W	T			A	B	W	P1	T1		
PS	L (0.2mΩ)	6.3	3.15	1.40	TEB	5000	3.45±0.1	6.60±0.1	12	8	1.6±0.1	330
	L (0.3mΩ)	6.3	3.15	1.32	TEB	5000	3.45±0.1	6.60±0.1	12	8	1.6±0.1	330
	L (0.5mΩ)	6.3	3.15	1.12	TEB	5000	3.45±0.1	6.60±0.1	12	8	1.6±0.1	330
	J (0.2mΩ)	10.0	5.2	1.98	TEB	3000	5.6±0.1	10.45±0.1	16	8	2.3±0.1	330
	J (0.5mΩ)	10.0	5.2	1.27	TEB	3000	5.6±0.1	10.45±0.1	16	8	2.3±0.1	330
	J (1mΩ)	10.0	5.2	0.89	TEB	3000	5.6±0.1	10.45±0.1	16	8	2.3±0.1	330
	J (2mΩ)	10.0	5.2	1.17	TEB	3000	5.6±0.1	10.45±0.1	16	8	2.3±0.1	330
	J (3mΩ)	10.0	5.2	0.95	TEB	3000	5.6±0.1	10.45±0.1	16	8	2.3±0.1	330
	J (4mΩ)	10.0	5.2	0.84	TEB	3000	5.6±0.1	10.45±0.1	16	8	2.3±0.1	330
	F (0.5mΩ)	3.0	3.8	1.8	TEB	3000	3.25±0.1	4.25±0.1	12	8	2.2±0.1	330
	F (1mΩ)	3.0	3.8	1.8	TEB	3000	3.25±0.1	4.25±0.1	12	8	2.2±0.1	330
	G (0.5mΩ)	6.9	6.6	3.05	TEB	1500	7.2±0.1	7.3±0.1	16	12	3.4±0.1	330
	G (1mΩ)	6.9	6.6	2.8	TEB	1500	7.2±0.1	7.3±0.1	16	12	3.4±0.1	330
	B	10.0	8.4	0.65	TEB	4000	8.8±0.1	10.4±0.1	24	12	1.0±0.1	329
	B (0.2mΩ)	10.0	8.4	1.1	TEB	3000	8.8±0.1	10.4±0.1	24	12	1.5±0.1	329
I (3m/4mΩ)	10.0	5.2	0.7	TEB	3000	5.6±0.1	10.4±0.1	24	8	1.1±0.1	329	
E	6.4	6.4	0.65	TE	2000	6.8±0.1	6.8±0.1	12	8	1.0±0.1	178	
TSL	1	6.3	3.1	1	TE	3000	3.4±0.1	6.6±0.1	12.0±0.1	4.0±0.1	1.3±0.1	180
CSR	1	10.8	6.2	2.1	TED	1000	6.7±0.1	11.1±0.14	24	12.0±0.1	2.6±0.1	255
	2	12.8±0.5	8.2±0.3	3.1±0.2	TEB	1000	9.0±0.15	13.0±0.1	24	12.0±0.1	4.35±0.1	330
LR72	A	10±0.2	5.2	2	TED	2000	1.45±0.2	5.7±0.2	24±0.2	8.0±0.10	2.3±0.2	255
	B	10±0.2	3	2	TED	2000	1.45±0.2	3.4±0.2	24±0.2	8.0±0.10	2.5±0.2	255
	C	11.2±0.4	3.2±0.4	3.5±0.4	TEB	1500	1.17±0.1	4.3±0.1	24±0.2	8.0±0.1	4.4±0.15	330
BLR	1	13±0.5	5.5±0.5	2.5±1.0	TE	1000	6.2±0.1	15.0±0.1	24.0±0.2	12.0±0.1	6.7±0.1	330
	2	18±0.5	6.3±0.5	3.0±0.1	TE	1000	7.0±0.1	20.5±0.1	32.0±0.2	12.0±0.1	7.5±0.1	330
	3	18±0.5	8.2±0.5	3.0±0.1	TE	750	10.0±0.1	20.5±0.1	32.0±0.2	16.0±0.1	7.0±0.1	380
CN CN_A CN_K/N CNZ CNN CN-RT CN_K-RT	1F8K	3.8±0.1	1.6±0.2	0.44±0.1	TD	5000	1.85±0.1	4.05±0.1	8.0±0.2	4.0±0.05	0.6±0.1	180
	1E2/1E2K	1	1	0.35	TD	10000	1.2±0.1	1.2±0.1	8.0±0.2	2.0±0.05	0.45±0.1	180
	1E4	2		0.45	TD	10000	1.27±0.1	2.27±0.1	8.02±0.2	2.0±0.6	0.7±0.1	180
	1E4K		0.35	TD	10000	1.2±0.1	2.2±0.1	8.02±0.2	2.0±0.6	0.45±0.1	180	
	1J2/1J2K	1.60	1.6	0.6/0.5	TD	5000	1.9±0.1	1.9±0.1	8.0±0.2	4.0±0.1	0.6+0.2/-0 0.75+0.2/-0	180
	1J2/1J2K	1.60	1.6	0.6/0.5	TDD	10000	1.9±0.1	1.1±0.1	8.0±0.2	4.0±0.1	0.6+0.2/-0 0.75+0.2/-0	255
	1J4/1J4K,A	3.20		0.6/0.5	TD	5000	3.5±0.1	2.0±0.1	8.0±0.2	4.0±0.1	0.75+0.2/-0 0.6+0.2/-0	180
					TDD	10000	1.9±0.1	1.1±0.1	8.0±0.2	4.0±0.1	0.75+0.2/-0 0.6+0.2/-0	255
	1J8	6.40	2	0.6	TE	4000	6.9±0.2	2.0±0.2	12.0±0.1	4.0±0.1	0.9±0.1	180
				TE	10000	6.9±0.2	2.0±0.2	12.0±0.1	4.0±0.1	0.9±0.1	255	
	2A2	2.54	2	0.6	TE	4000	2.9±0.2	2.4±0.2	8.0±0.2	4.0±0.1	1±0.15	180
					TE	10000	2.9±0.2	2.4±0.2	8.0±0.2	4.0±0.1	1±0.15	255
	2A4	5.08			TE	4000	5.4±0.2	2.3±0.2	12.0±0.1	4.0±0.1	1±0.15	180
					TE	10000	5.4±0.2	2.3±0.2	12.0±0.1	4.0±0.1	1±0.15	255
	2A8	10.16	3.2	0.6	TE	4000	10.6±0.2	2.45±0.2	16	4.0±0.1	1±0.15	180
					TE	10000	10.6±0.2	2.45±0.2	16	4.0±0.1	1±0.15	255
	2B2	2.54			TE	4000	3.5±0.2	2.85±0.2	8.0±0.2	4.0±0.1	1±0.15	180
					TE	10000	3.5±0.2	2.85±0.2	8.0±0.2	4.0±0.1	1±0.15	255
	2B4	5.08	3.1	0.55	TE	4000	5.4±0.2	3.4±0.2	12.0±0.1	4.0±0.1	1±0.15	180
					TE	10000	5.4±0.2	3.4±0.2	12.0±0.1	4.0±0.1	1±0.15	255
2B4A	5.10	TE			4000	5.4±0.2	3.4±0.2	12	4	1±0.15	180	
		TE			2000	10.55±0.2	3.6±0.2	16	4.0±0.1	1±0.15	180	
2B8	10.16	3.2	0.6	TE	5000	10.55±0.2	3.6±0.2	16	4.0±0.1	1±0.15	255	
CND-K	1J10K	3.2	1.6	0.5	TD	5000	2.0±0.1	3.5±0.1	8.0	4.0	0.6+0.2/-0	180
CND	2B10	6.40	3.1	0.6	TE	4000	3.4±0.2	6.6±0.2	12.0±0.1	4.0±0.1	1±0.15	180
	1J10	3.20	1.6	0.55	TD	5000	2.0±0.1	3.5±0.1	8.0±0.2	4.0±0.1	0.75+0.2/-0	180
	2A10	4.00	2.1	0.6	TE	4000	2.5±0.2	4.45±0.2	12.0±0.1	4.0±0.1	1±0.15	180
CNB	2B5Z	3.2	2.5	0.6	TE	4000	3.0±0.2	3.5±0.2	8.0±0.2	4.0±0.1	1±0.15	180
	2E9Z	6.40	3.2		TE	4000	3.5±0.2	6.7±0.2	12.0±0.1	4.0±0.1	1±0.15	180
RD41	2A	2	1.25	-	TE	3000	1.5±0.2	2.3±0.2	8	4	1.5 max.	178
RN41	2ES, 12M	3.5	1.4	-	TE	3000	1.7±0.1	3.7±0.1	8	4	2.0 max.	178
RM41	2D	3.2	1.55	-	TE	2000	1.9±0.1	3.5±0.1	8	4	2.0 max.	178
CC	2E, 2H, 25	5.9	2.2	-	TE	1500	2.4±0.1	6.2±0.1	12	4	2.9 max.	178
NT73 LA73 LT73	1E	1	0.5	0.35	TP	10000	1.15±0.1	0.65±0.1	8.0±0.2	2.0±0.05	0.45+0.1/-0	178
	1J	1.6	0.8	0.45	TD	5000	1.9±0.1	1.1±0.1	8.0±0.2	4.0±0.1	0.6+0.2/-0	178
	2A	2	1.25	0.5	TD	5000	2.4±0.2	1.65±0.2	8.0±0.2	4.0±0.1	0.75+0.2/-0	178
	2B	3.2	1.6	0.6	TD	5000	3.5±0.2	2±0.2	8.0±0.2	4.0±0.1	0.75+0.2/-0	178
SDT73H/SV	2B	3.2	1.6	0.5	TEK/TE	1000/5000	3.6±0.1	2.0±0.1	8.0±0.2	4.0±0.1	0.85+0.05/-0.1	180

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.



11/14/18

For Product Specific packaging, please refer to the individual product data sheets.

Type		Component Size (mm)			Carrier Tape	Quantity/ Reel (Pieces)	Taping (mm)					Reel Size $\phi a$ (mm)
		L	W	T			A	B	W	P1	T1	
LP73	1J	1.6	0.8	0.5	TE	5000	1.9±0.1	1.1±0.1	8.0±0.2	4.0±0.1	0.6±0.1	180
	2A	2.0	1.25	0.5	TE	5000	2.4±0.1	1.6±0.1	8.0±0.2	4.0±0.1	0.85±0.1	180
	2B	3.2	1.6	0.5	TE	5000	3.6±0.1	2.0±0.2	8.0±0.2	4.0±0.1	0.85±0.1	180
RCU		1.60	0.8	1.15	TE/TED	2000/5000	1.85±0.16	1.05±0.15	8.0±0.2	4.0±0.1	1.25±0.1	178/260
RCT		2.00	1.25	1.45	TE/TED	2000/5000	2.45±0.15	1.65±0.1/-0.2	8.0±0.2	4.0±0.1	1.70±0.1	178/260
RCS		3.20	1.6	1.25	TE/TED	2000/5000	3.6±0.2	2.0±0.2	8.0±0.2	4.0±0.1	1.45±0.15	178/260
RCW		3.2	1.6	2	TE	2000	3.4±0.1/-0.05	1.95±0.1/-0.05	8.0±0.2	4.0±0.1	2.2±0.1	178
KQC	0603	1.6	1.05	0.7	TE	2000	1.77±0.05	1.20±0.05	8	4	0.86±0.05	178
KQT	0402	1.0	0.5	0.55	TD	2000	1.20±0.05	0.65±0.05	8	4	0.68±0.1	178
KQC					TP	10000	1.20±0.05	0.65±0.05	8	2	0.68±0.1	178
KQ	0603	1.60	1.0	0.9	TE	2000	1.86±0.05	1.15±0.05	8	4	1.05±0.1	178
	0805	2.00	1.5	1.3	TE	2000	2.22±0.1	1.60±0.1	8	4	1.5±0.1	178
	1008	2.50	2.2	1.8	TE	2000	2.7±0.1	2.35±0.1	8	4	2.1±0.1	178
LPC	4545	4.6	4.1	4.6	TE	2500	4.5±0.2	5.0±0.2	12	8	5.0±0.2	380
	4045	4.50	4	4.5	TED	2500	4.15±0.2	4.8±0.2	12.0±0.1	8.0±0.2	5±0.2	380
	4235	4.5	4.2	3.5	TM	2000	4.8±0.2	4.5±0.2	12.0±0.1	8.0±0.1	4.0±0.2	330
CZB	1E	1.0±0.1	0.5±0.1	0.5±0.1	TP	10000	0.65±0.1	1.17±0.1	8.0±0.22	2.0±0.23	0.63±0.1	178
	1J	1.6±0.15	0.8±0.15	0.8±0.15	TD	4000	1.1±0.1	1.8±0.1	8.1±0.1	4.0±0.1	1.1±0.1	178
CZP	2A	2.0±0.2	1.25±0.2	0.9±0.2	TD	2000/4000*	1.6±0.1	2.4±0.1	8.1±0.1	4.0±0.1	1.2±0.1	178
	2B	3.2±0.2	1.6±0.2	0.51±0.25	TE	3000	1.8±0.1	3.5±0.1	8.1±0.1	4.0±0.1	1.8±0.1	178
MHL	1E	1.0±0.1	0.5±0.1	0.5±0.1	TP	10000	0.67±0.1	1.17±0.1	8.0±0.22	2.0±0.23	0.63±0.1	178
	1J	1.6±0.15	0.8±0.15	0.8±0.15	TD	4000	1.15±0.1	1.85±0.1	8.0±0.1	4.0±0.1	1.1±0.1	178
NV73 NV73DL	1H	0.6	0.3	0.3	TBM	15000	0.38±0.02	0.68±0.02	8.0±0.2	2.0±0.1	0.42±0.02/-0	180
	1E	1.0±0.1	0.5±0.1	0.25±0.15	TP	10000	0.65±0.1	1.15±0.1	8.0±0.2	2.0±0.1	0.6±0.2	180
	1J	1.6±0.15	0.8±0.15	0.8±0.15	TE	2500	1.2±0.1	1.9±0.1	8.0±0.2	4.0±0.1	1.75 max.	180
	2A	2.0±0.2	1.25±0.2	1.3 max.	TE	2500	1.6±0.1	2.4±0.1	8.0±0.2	4.0±0.1	1.75 max.	180
	2B	3.2±0.2	1.6±0.2	1.65 max.	TE	2500	2.0±0.1	3.6±0.1	8.0±0.2	4.0±0.1	1.75 max.	180
	2E	3.2	2.5	1.5 max.	TE	2000	2.85±0.1	3.5±0.1	8.0±0.2	4.0±0.2	1.55 max.	180
	2J	4.5	3.2	2.0 max.	TE	1000	3.6±0.1	4.9±0.1	12.0±0.2	8.0±0.2	2.05 max.	180
	2L	5.7	5.0	2.5 max.	TE	1000	5.4±0.1	6.0±0.1	12.0±0.2	8.0±0.2	2.60 max.	180
NV73DS	2L	6.1	5.1	3.0 max.	TE	500	5.3±0.1	6.6±0.1	12	8	3.00 max.	180
TF	10	1.00	0.5	0.45	TB	10000	0.65±0.05	1.15±0.05	8.0±0.2	2.0±0.1	0.6±0.2/-0	178
	16	1.60	0.8	0.6	TD	5000	1.1±0.1	1.9±0.1	8.0±0.3	4.0±0.1	0.6±0.1	180
CCP	2B	3.20	1.6	1.2	TE	3000	1.9±0.1	3.5±0.1	8.0±0.3	4.0±0.1	1.5±0.1	178
	2E		2.5	2.2	TE	2000	2.8±0.1	3.5±0.1	8.0±0.3	4.0±0.1	2.4±0.1	178
CCF	1N,1F	6.0	2.5	2.5	TE	1000	2.7±0.2	6.4±0.2	12.0±0.3	4.0±0.1	2.9±0.2	178
AC(X)	Q16	4.9	5.99	1.6	TEB	2500	6.5±0.1	5.3±0.1	12	8	2.5±0.2	330
DNA	Q20	8.66	5.99	1.6	TEB	2500	6.5±0.1	9.0±0.1	16	8	2.5±0.2	330
DN(X)	Q24	8.66	5.99	1.6	TEB	2500	6.5±0.1	9.0±0.1	16	8	2.5±0.2	330
HVD	Q28	10.0	5.99	1.6	TEB	2500	6.5±0.1	10.3±0.1	16	8	2.5±0.2	330
RD(X)	N08	4.83	5.99	1.6	TEB	2500	6.5±0.1	5.3±0.1	12	8	2.5±0.2	330
R(X)A	N14	8.66	5.99	1.6	TEB	2500	6.5±0.1	9.0±0.1	16	8	2.5±0.2	330
RT(X)	N16	9.91	5.99	1.6	TEB	2500	6.5±0.1	10.3±0.1	16	8	2.5±0.2	330
TF(X)	S03	2.92	2.30	0.95	TE	3000	3.15±0.1	2.77±0.1	8	4	1.3±0.2	180

\* CZB2A: <2200Ω=TD:4,000; 2200Ω=TD: 2,000 pcs/reel

### Packaging specifications

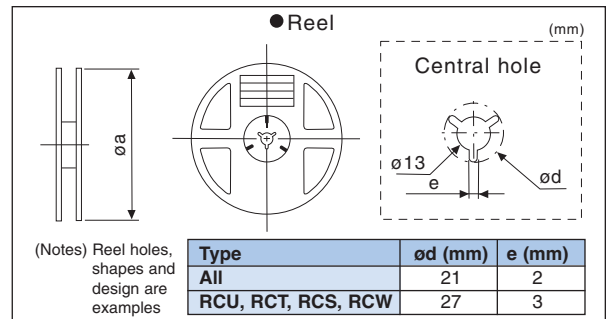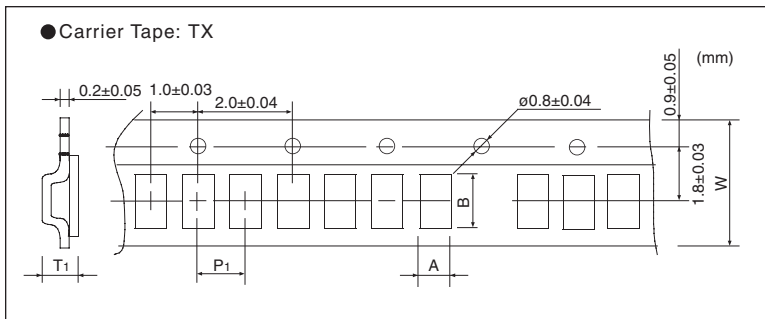




### standard soldering pad dimensions

The optimum soldering pad dimensions may differ depending on soldering conditions, however, the following land dimensions are generally recommended.

### Flat Type Components

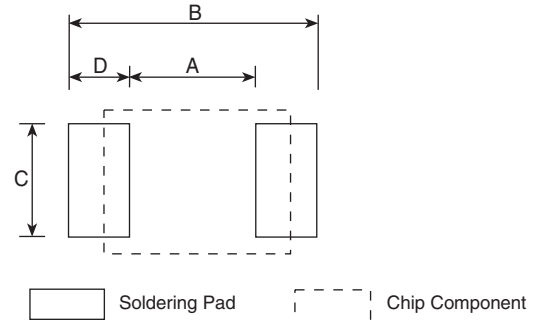

Type	Style	Dimensions millimeters					
		Component Size	A	B	C	D	
WG73	1E	0.5 X 1.0	0.2	1.1	1.0	0.45	
	1J	0.8 X 1.6	0.4	1.7	1.6	0.65	
	2A	1.25 X 2.0	0.55	2.35	2.0	0.9	
WK73	2B/2B15	1.6 X 3.2	0.7	2.3	3.2	0.8	
WU73	2H/2H2	2.5 X 5.0	1.0	3.5	5.0	1.25	
	2J	3.1 X 4.6	1.6	3.9	4.75	1.15	
	3A/3A3	3.1 X 6.4	1.6	3.9	6.4	1.15	
RK73 RS73 SG73 RN73R RN73H SR73 LT73 NT73 LA73 RF73 HV73 LP73 SDT73	1F	0.4 X 0.2	0.12	0.48	0.18	0.18	
	1H	0.6 X 0.3	0.25	0.7	0.3	0.225	
	1E	1.0 X 0.5	0.5	1.3	0.3	0.4	
	1J	1.6 X 0.8	1.0	2.0	0.6	0.5	
	2A	2.0 X 1.25	1.3	2.5	1.05	0.6	
	2B	3.2 X 1.6	2.2	4.0	1.4	0.9	
	2E	3.2 X 2.5	2.2	4.0	2.3	0.9	
	2H	5.0 X 2.5	3.3	6.1	2.3	1.4	
	3A/W3W/ W3A2	6.4 X 3.2	4.6	8.0	3.0	1.7	
	SL/TSL	07, W07	5.0 X 2.5	2.3	7.0	2.6	2.35
		1, W1	6.3 X 3.1	3.4	8.0	3.0	2.3
		2-3	11.5 X 7.0	5.4	15.0	5.0	4.8
SLN	2, 3, 5	11.5 X 7.0	5.0	15.0	6.0	5.0	
CCP	2E	3.2 X 2.5	2.2	5.0	2.0	1.4	
	2B	3.2 X 1.6	2.2	5.0	1.4	1.4	
CCF	1N, 1F	6.0 X 2.5	3.0	7.2	2.8	2.1	
LPC	4045	4.5 X 4.0	1.5	5.1	3.5	1.8	
	4235	4.5 X 4.2	1.9	5.5	2.6	1.8	
	4545	4.1 X 4.6	2.9	5.3	4.7	1.2	
	10065	10.0 X 10.4	5.0	13.0	6.0	4.0	
	12065	12 X 12.4	5.0	15.0	7.5	5.0	
KQT	0402	1.0 X 0.5	0.46	1.18	0.66	0.36	
KQ KQC	0603	1.6 X 1.0	0.64	1.92	1.02	0.64	
	0805	2.0 X 1.5	0.76	2.8	1.78	1.02	
	1008	2.5 X 2.2	1.27	3.31	2.54	1.02	
CZB CZP MHL	1E	0.50 X 0.10	0.4	1.6	0.6	—	
	1J	0.80 X 1.6	0.55	2.6	0.94	—	
	2A	1.25 X 2.0	0.66	3.0	1.45	—	
	2B	1.6 X 3.2	1.5	4.4	1.8	—	
TF	10	1.0 X 0.5	0.5	1.3	0.3	0.4	
	16	1.6 X 0.8	1.0	2.0	0.6	0.5	

Type	Style	Dimensions millimeters				
		Component Size	A	B	C	D
TLR	1E	1.0 X 0.5	0.2	1.3	0.6	0.55
	2A	2.0 X 1.25	0.5	2.5	1.3	1.0
	2BW/2BP (0.5mΩ)	3.2 X 1.6	0.6	4.0	1.8	1.7
	2BN/2B/ 2BW/2BP (1mΩ, 1.5mΩ)	3.2 X 1.6	0.8	4.0	1.8	1.6
	2BN/2B/ 2BW/2BP (2mΩ-20mΩ)	3.2 X 1.6	1.4	4.0	1.8	1.3
	2H, 2HW (0.5mΩ, 1mΩ)	5.0 X 2.5	1.0	6.1	3.0	2.55
	2H, 2HW (2mΩ-6mΩ)	5.0 X 2.5	1.3	6.1	3.0	2.4
	2H, 2HW (7mΩ-10mΩ)	5.0 X 2.5	3.3	6.1	3.0	1.4
	3A(1mΩ)	6.35 X 3.18	1.45	7.55	3.83	3.05
	3A(2mΩ)	6.35 X 3.18	3.45	7.55	3.83	2.05
	3A(3mΩ)	6.35 X 3.18	2.15	7.55	3.83	2.70
	3A(4mΩ)	6.35 X 3.18	3.45	7.55	3.83	2.05
	3AW (0.5-0.82mΩ)	6.35 X 3.18	0.8	7.55	3.83	3.375
	3AW (1mΩ-4mΩ)	6.35 X 3.18	1.45	7.55	3.83	3.05
	3AW (5mΩ-8mΩ)	6.35 X 3.18	3.45	7.55	3.83	2.05
	3AW (9mΩ, 10mΩ)	6.35 X 3.18	4.40	7.55	3.83	1.575
	3AP (0.5-0.82mΩ)	6.35 X 3.18	0.80	7.55	3.83	3.375
	3AP (1mΩ)	6.35 X 3.18	1.45	7.55	3.83	3.05
	3AP (2mΩ)	6.35 X 3.18	1.05	7.55	3.83	3.25
	3AP (3mΩ-4mΩ)	6.35 X 3.18	1.45	7.55	3.83	3.05
	3AP (5mΩ-8mΩ)	6.35 X 3.18	3.45	7.55	3.83	2.05
	3AP (9mΩ-10mΩ)	6.35 X 3.18	4.40	7.55	3.83	1.575
	3APS	6.35 X 3.18	3.45	7.55	3.83	2.05


### standard soldering pad dimensions (continued)

The optimum soldering pad dimensions may differ depending on soldering conditions, however, the following land dimensions are generally recommended.

Type	Style	Dimensions millimeters				
		Component Size	A	B	C	D
TLRH	2A	2.0 X 1.25	0.5	2.5	1.3	1.0
	3AW	6.3 X 3.2	4.4	7.5	3.7	1.55
	3AP	6.3 X 3.2	2.15	7.55	3.83	2.7
TLRZ	1E	1.0 X 0.5	0.5	1.3	0.6	0.4
	1J	1.6 X 0.8	0.5	2.0	0.9	0.75
	2A	2.0 X 1.25	0.5	2.5	1.45	1.0
	2B	3.2 X 1.6	2.2	3.8	1.8	0.8
UR73	2A	2.0 X 1.25	1.3	2.6	1.1	0.65
	2B	3.2 X 1.6	2.2	4.2	1.6	1.0
UR73D	1E	1.0 X 0.5	0.5	1.8	0.5	0.65
	1J	1.6 X 0.8	0.5	2.5	0.9	1.0
	2A	2.0 X 1.25	0.8	3.4	1.3	1.3
	2B	3.2 X 1.6	1.2	4.6	1.8	1.7
	2H (10mΩ-30mΩ)	5.0 X 2.5	1.8	6.1	2.6	2.15
	2H (33mΩ-100mΩ)	5.0 X 2.5	3.3	6.1	2.5	1.4
	3A (10mΩ-30mΩ)	6.3 X 3.1	2.3	8.0	3.3	2.85
3A (33mΩ-100mΩ)	6.3 X 3.1	4.6	8.0	3.2	1.7	
UR73V	2A	2.0 X 1.25	1.2	3.4	1.3	1.1
	2B	3.2 X 1.6	2.2	4.2	1.6	1.0
UR73VD	2A (10m-18m)	2.0 X 3.1	0.6	3.4	1.3	1.4
	2A (20m-36m)	2.0 X 3.1	0.8	3.4	1.3	1.3
	2B (10m-13m)	3.2 X 1.6	0.7	4.4	1.6	1.85
	2B (15m-16m)	3.2 X 1.6	0.9	4.4	1.6	1.75
	2B (18m-20m)	3.2 X 1.6	1.0	4.4	1.6	1.7
	2B (22m-27m)	3.2 X 1.6	1.1	4.4	1.6	1.65
NV73 NV73DL	1H	0.6 X 0.3	0.25-0.35	0.65-0.95	0.25-0.35	0.2-0.3
	1E	1.0 X 0.5	0.51	1.73	0.51	0.61
	1J	1.6 X 0.8	1.0	3.0	1.2	1.0
	2A	2.0 X 1.25	1.2	4.0	1.0	1.4
	2B	3.2 X 1.6	2.2	5.0	1.3	1.4
	2E	3.2 X 2.5	2.2	5.0	2.2	1.4
	2J	4.5 X 3.2	3.0	5.8	2.9	1.4
	2L	5.7 X 5.0	4.5	7.5	4.7	1.5

Type	Style	Dimensions millimeters				
		Component Size	A	B	C	D
NV73DS	2L	6.1 X 5.1	4.5	7.5	4.7	1.5
PS	L	6.3 X 3.15	3.4	7	3.4	1.8
	J	10.0 X 5.2	5.6	11	6.2	2.7
	B(0.2mΩ)	10.0 X 8.4	2.2	10.8	9.0	4.30
	B(0.75mΩ)	10.0 X 8.4	2.8	10.7	8.9	3.95
	B(1mΩ)	10.0 X 8.4	3.8	10.7	8.9	3.45
	I	10.0 X 5.2	5.6	11.0	6.2	2.7
	E	6.4 X 6.4	1.4	7.6	7.0	3.1


### Flat Type Components



### current sense resistor—CSR

Type	Dimensions inches (mm)								
	L	W	A	B	C	D	E	F	G
CSR1	.393 (10.0)	.236 (6.0)	.039 (1.0)	.078 (2.0)	.196 (5.0)	.062 (1.6)	.118 (3.0)	.078 (2.0)	.039 (1.0)
	CSR2	.472 (12.0)	.314 (8.0)	.062 (1.6)	.125 (3.2)	.236 (6.0)	.086 (2.2)	.208 (5.3)	.090 (2.3)

### CSR

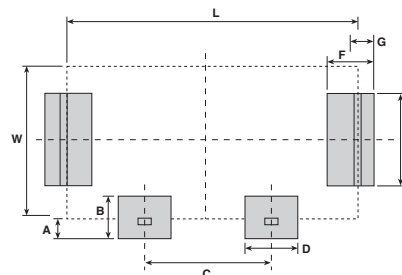


### resistor arrays—CN


Type	Style	Dimensions								
		Component Size		A	B	C	D	E	F	G
		L*	W							
CN	1E2K	1.0	1.0	0.5	1.5	0.4	0.25	0.67	—	—
	1E4K	2.0	1.0							
	1F8K	3.8	1.6	1.0	2.6	0.3	0.5	0.5	—	—
	1JA/K	0.8 X n	1.6	1.0	2.6	0.6	0.5	0.8	—	—
	1E	0.5 X n	1.0	0.5	1.5	0.3	0.5	0.5	—	—
	2B4A	5.1	3.1	2.1	4.1	0.9	0.5	1.27	—	—
	1J	0.8 X n	1.6	0.8	2.6	0.4	0.5	0.8	—	—
	2A	1.27 X n	2.0	1.0	3.0	0.65	0.5	1.27	—	—
CND	2B	1.27 X n	3.2	2.2	4.2	0.65	0.5	1.27	—	—
	1J10K	3.2	1.6	0.9	2.6	0.4	0.5	0.64	—	—
	2B10	6.4	3.1	2.1	4.1	0.6	0.5	1.27	—	—
	1J10Y	3.2	1.6	0.9	2.3	0.3	0.7	0.635	2.45	0.4
CNB	2A10Y	4.0	2.1	1.0	3.0	0.4	1.0	0.8	3.4	0.4
	2E5Z	3.2	2.5	1.7	3.9	0.5	1.1	1.0	0.5	—
CNN	2B9Z	6.4	3.2	2.4	4.6	0.5	1.1	1.3	0.65	—
	2A	2.54	2.0	1.2	2.8	0.6	0.4	1.27	—	—

\* n = number of resistors


#### Chip Networks

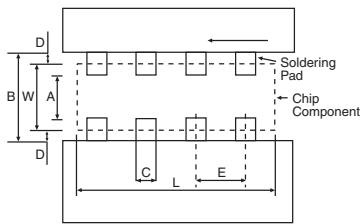

#### CNB2E5Z, CNB2B9Z




#### CND1J10Y, CND2A10Y




### integrated passive devices—SOIC, TSSOP, QSOP & SOT23

Chip Size	Dimensions inches (mm)					
	A	B	C	D	E	F
N08	.028 (0.7)	.050 (1.27)	.094 (2.4)	.098 (2.5)	.287 (7.3)	.150 (3.81)
N14	.028 (0.7)	.050 (1.27)	.094 (2.4)	.098 (2.5)	.287 (7.3)	.300 (7.62)
N16	.028 (0.7)	.050 (1.27)	.094 (2.4)	.098 (2.5)	.287 (7.3)	.350 (8.89)
Q16	.012 (0.3)	.025 (0.63)	.050 (1.27)	.180 (4.56)	.280 (7.1)	.175 (4.45)
Q20	.012 (0.3)	.025 (0.63)	.050 (1.27)	.180 (4.56)	.280 (7.1)	.225 (5.72)
Q24	.012 (0.3)	.025 (0.63)	.050 (1.27)	.180 (4.56)	.280 (7.1)	.275 (6.99)
SOT23	.035 (0.9)	.037 (0.95)	.055 (1.4)	.031 (0.8)	.141 (3.6)	—

#### SOIC, TSSOP, QSOP

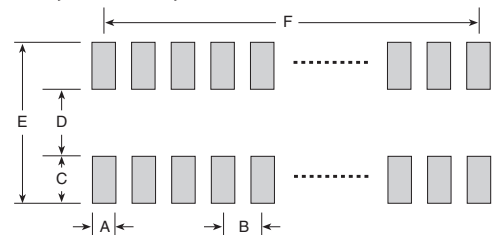


#### SOT23




## melf type components—RD41, RN41, RM41, MLT, CC

Type	Style	Dimensions millimeters				
		Component Size	A	B	C	D
RD41 RN41 RM41 CC	2A	2.0 X 1.25	1.3	1.3	2.0	1.3
	2ES 12M	3.5 X 1.40	1.5	2.2	1.5	2.0
	2D	3.2 X 1.55	1.5	2.2	1.5	2.0
	2E 25	5.9 X 2.2	2.0	3.0	3.0	4.0
	2H	5.9 X 2.2	2.0	3.0	3.0	4.0

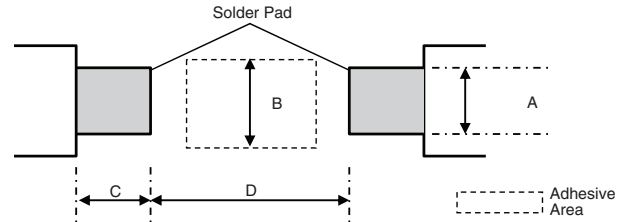


## other chips—RCS, RCT, RCU, RCW

Type	Dimensions millimeters	
	A	B
RCS	4.1-4.3	1.4-1.6
RCT	2.9-3.1	1.05-1.25
RCU	2.5-2.7	0.6-0.8
RCW	4.1-4.3	1.4-1.6




## power chip inductor—LPC

Type	Dimensions inches (mm)			
	A	B	C	D
LPC4045	.059 (1.5)	.201 (5.1)	.138 (3.5)	.071 (1.8)
LPC4235	.075 (1.9)	.217 (5.5)	.102 (2.6)	.071 (1.8)
LPC4545	.114 (2.9)	.209 (5.3)	.185 (4.7)	.047 (1.2)

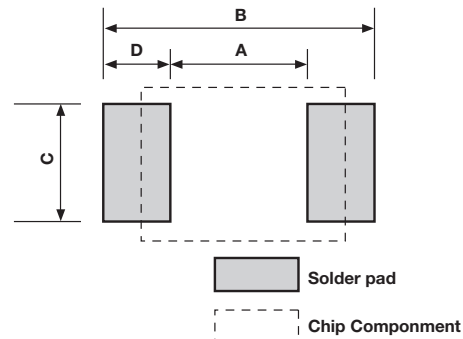

## current sense resistor—PSG/PSF

Type	Dimensions inches (mm)								
	A	B	C	D	E	F	G	H	I
PSG4 (2725)	.078 (2.0)	.370 (9.4)	.220 (5.6)	.146 (3.7)	.031 (0.8)	.031 (0.8)	.307 (7.8)	.035 (0.9)	.138 (3.5)
PSF4 (1216)	.024 (0.6)	.142 (3.6)	.116 (2.95)	.059 (1.5)	.020 (0.5)	.024 (0.6)	.142 (3.6)	.028 (0.7)	.059 (1.5)





KOA SPEER ELECTRONICS, INC.

# Appendix C


packaging - leaded components

## axial tapings


Straight Type Name	Taping Type Name	Lead ød (mm)	Packaging Style	Packaging & Q'ty (pcs)		Weight (g)		
				AMMO	Reel	AMMO	Reel	Net 1000pcs
MOS1/2 <sup>2</sup>	MOS1/2CT26	0.6	T26	2000	—	350	—	140
MOS1/2	MOS1/2CT52	0.6	T52	2000	5000	590	1400	250
MOS1	MOS1CT52	0.6	T52	2000	4000	810	1550	350
MOS1	MOS1CT526	0.6	T52	2000	4000	810	1550	350
MOS1C8	MOS1CT528	0.8	T52	2000	4000	810	1550	350
MOS1	MOS1CL52	0.8	L52	2000	4000	810	1550	350
MOS2	MOS2CT52	0.8	T52	1000	2000	910	1750	800
MOS2	MOS2CT521	0.8	T521	1000	—	910	—	800
MOS2	MOS2CL521	0.8	L521	1000	1000	910	950	800
MOS3	MOS3CL521	0.8	L521	500	—	775	—	1350
MOS3	MOS3CT521	0.8	T521	500	1000	775	1500	1350
MOS3	MOS3CT631	0.8	T631	1000	1000	1580	1600	1400
MOS3	MOS3CL631	0.8	L631	1000	1000	1580	1600	1400
SPR1/4 <sup>3</sup>	SPR1/4CT26	0.45	T26	2000	—	250	—	90
SPR1/4	SPR1/4CT52	0.45	T52	2000	5000	340	850	140
SPR1/2	SPR1/2CT26	0.6	T26	2000	—	350	—	140
SPR1/2	SPR1/2CT52	0.6	T52	2000	5000	590	1400	250
SPR1/2	SPR1/2CL52	0.65	L52	2000	5000	590	1400	250
SPR1	SPR1CT52	0.8	T52	2000	4000	1140	2150	500
SPR1	SPR1CL52	0.8	L52	2000	4000	1140	2150	500
SPR2	SPR2CT52	0.8	T52	1000	2000	910	1750	800
SPR2	SPR2CT521	0.8	T521	1000	—	910	—	800
SPR2	SPR2CL521	0.8	L521	1000	1000	910	950	800
SPR3	SPR3CT521	0.8	T521	500	1000	765	1500	1350
SPR3	SPR3CL521	0.8	T521	500	—	775	—	1350
SPR3	SPR3CT631	0.8	T631	1000	1000	1580	1600	1400
SPR3	SPR3CL631	0.8	L631	1000	1000	1580	1600	1400
RF16	RF16CT26	0.45	T26	2000	—	220	—	90
RF16	RF16CT52	0.45	T52	2000	5000	340	800	150
RF25	RF25CT26	0.6	T26	2000	—	330	—	140
RF25	RF25CT52	0.6	T52	2000	5000	500	1300	230
RF50	RF50CT52	0.6	T52	2000	4000	660	1320	310
RF1	RF1CT52	0.8	T52	2000	4000	1080	2050	500
RF2	RF2CT521	0.8	T521	500	1000	700	1420	1300
RF2	RF2CT631	0.8	T631	1000	—	1410	—	1350
Z16	Z16CT26	0.45	T26	5000	—	615	—	110
Z16	Z16CT52	0.45	T52	3000	5000	530	920	150
Z25	Z25CT26	0.6	T26	2000	—	410	—	180
Z25	Z25CT52	0.6	T52	2000	5000	530	1400	240
J1/6Z	J1/6ZCT26	0.5	T26	2000	—	230	—	90
J1/6Z	J1/6ZCT52	0.5	T52	2000	5000	320	950	130
J1/4Z	J1/4ZCT26	0.6	T26	2000	—	320	—	130
J1/4Z	J1/4ZCT52	0.6	T52	2000	5000	460	1310	190
JL5	JL5CT26	0.5	T26	5000	—	420	—	75
JL5	JL5CT52	0.5	T52	5000	—	680	—	120
JL6	JL6CT26	0.6	T26	5000	—	515	—	100
JL6	JL6CT52	0.6	T52	5000	1000	815	—	160
JL8	JL8CT52	0.8	T52	—	10000	—	3054	305
LP1/8	LP1/8CT26	0.65	T26	2000	—	410	—	170
LP1/8	LP1/8CT52	0.65	T52	2000	—	580	—	260
LP1/16	LP1/16CT26	0.5	T26	4000	—	450	—	100
LP1/16	LP1/16CT52	0.5	T52	4000	—	630	—	150
CFS1/4	CFS1/4 CT26	0.45	T26	5000	—	615	—	110
CFS1/4	CFS1/4 CT52	0.45	T52	3000	5000	530	920	150
CF1/4	CF1/4 CT26	0.6	T26	2000	—	410	—	180
CF1/4	CF1/4 CT52	0.6	T52	2000	5000	530	1400	240
CFB1/2	CFB1/2 CT52	0.7	T52	2000	4000	1110	2280	520
CFS1/2	CFS1/2 CT26	0.6	T26	2000	—	525	—	230
SDT101A	SDT101AXCT26	0.4	T26	2000	—	350	—	75
SDT101A	SDT101AXCT52	0.4	T52	2000	—	470	—	150
SDT101B	SDT101BXNT52	0.4	T52	—	2000	—	410	150

### Packaging

(1) AMMO Pack  
(Symbol:A) Standard



(2) Reel (Symbol: R)




\*1: The same taping applicable also to MOX.  
\*2: The same taping applicable also to MOSX.  
\*3: The same taping applicable also to SPRX.

## axial tapings


Straight Type Name	Taping Type Name	Lead ød (mm)	Packaging Style	Packaging & Q'ty (pcs)		Weight (g)		
				AMMO	Reel	AMMO	Reel	Net 1000pcs
CFS1/2	CFS1/2 CT52	0.6	T52	2000	4000	640	1500	290
CFPS1/4	CFPS1/4 CT26	0.45	T26	5000	—	615	—	100
CFPS1/4	CFPS1/4 CT52	0.45	T52	3000	—	530	—	150
CFP1/4	CFP1/4 CT26	0.6	T26	2000	—	410	—	180
CFP1/4	CFP1/4 CT52	0.6	T52	2000	5000	530	1400	240
CFP1/4	CFP1/4 CL52	0.65	L52	2000	—	530	—	240
CFPS1/2	CFPS1/2 CT26	0.6	T26	2000	—	525	—	230
CFPS1/2	CFPS1/2 CT52	0.6	T52	2000	4000	640	1500	290
MFS1/4**	MFS1/4 □CT26	0.45	T26	3000	—	350	—	90
MFS1/4	MFS1/4 □CT52	0.45	T52	3000	—	500	—	120
MFS1/2	MFS1/2 □CT26	0.6	T26	2000	—	360	—	160
MFS1/2	MFS1/2 □CT52	0.6	T52	2000	5000	500	1300	215
MF1/4	MF1/4 □CT26	0.6	T26	2000	—	360	—	160
MF1/4	MF1/4 □CT52	0.6	T52	2000	5000	500	1300	215
MF1/2	MF1/2 □CT52	0.6	T52	2000	4000	900	2000	360
MFP1/4	MFP1/4 □CT26	0.6	T26	2000	—	450	—	250
MFP1/4	MFP1/4 □CT52	0.6	T52	2000	5000	470	1400	250
MFP1/2	MFP1/2 □CT52	0.6	T52	2000	4000	950	2010	430
RNS1/4	RNS1/4 □CT52	0.6	T52	2000	4000	600	1550	440
RNS1/8	RNS1/8 □CT26	0.6	T26	2000	—	400	—	180
RNS1/8	RNS1/8 □CT52	0.6	T52	2000	5000	600	1550	220
RNS1/2	RNS1/2 □CT52	0.6	T52	2000	4000	1100	2150	500
RNS1	RNS1 □CT521	0.8	T521	500	1000	750	2100	1500
RCR16	RCR16 CT26	0.45	T26	5000	—	500	—	100
RCR16	RCR16 CT52	0.45	T52	3000	—	450	—	150
RCR25	RCR25 CT26	0.6	T26	2000	—	390	—	180
RCR25	RCR25 CT52	0.6	T52	2000	—	520	—	240
RCR25EN	RCR25EN CT26	0.6	T26	2000	—	390	—	180
RCR25RN	RCR25EN CT52	0.6	T52	2000	—	520	—	240
RCR50 (+)	RCR50(+) CT52	0.7	T52	2000	3000	1050	1630	520
RCR50EN	RCR50ENCT52	0.7	T52	2000	3000	1050	1630	520
RCR60	RCR60 CT52	0.7	T52	2000	3000	1050	1630	520
RCR75	RCR75 CT52	0.8	T52	1000	—	830	—	800
RCR100	RCR100 CT521	0.8	T521	500	—	750	—	1400
RCR100	RCR100 CT631	0.8	T631	1000	—	1450	—	1400
RK1/4	RK1/4 □CT26	0.6	T26	2000	—	360	—	250
RK1/4	RK1/4 □CT52	0.6	T52	2000	5000	500	1300	250
RK1/2	RK1/2 □CT52	0.6	T52	2000	4000	900	—	380
RK1	RK1 □CT521	0.8	T521	500	—	700	—	1340
PCF1/2	PCF1/2 CT52	0.7	T52	—	2000	—	1140	450
PCF1	PCF1 CT631	0.8	T631	—	1000	—	1530	1270
PCF2	PCF2 CT631	0.8	T631	—	500	—	1340	2160
HPC1/2	HPC1/2 CT52	0.8	T52	1000	2000	800	1440	600
HPC1	HPC1 CT631	0.8	T631	—	1000	—	1440	1170
CW1/4	CW1/4 CT26	0.45	T26	2000	—	460	—	150
CW1/4	CW1/4 CT52	0.45	T52	3000	—	690	—	150
CW1/2	CW1/2 CT52	0.6	T52	2000	—	570	—	250
CW1 <sup>4</sup>	CW1 CT52	0.8	T52	1000	—	580	—	650
CW2 <sup>4</sup>	CW2 CT52	0.8	T52	1000	—	780	—	950
CW2 <sup>4</sup>	CW2 CT521	0.8	T521	1000	—	790	—	950
CW3 <sup>4</sup>	CW3 CT521	0.8	T521	500	—	740	—	1780
CW3 <sup>4</sup>	CW3 CT631	0.8	T631	500	—	750	—	1780
CW1S	CW1S CT52	0.6	T52	2000	—	570	—	250
CWFS23	CWFS23 CT52	0.8	T52	1000	—	780	—	950
CWFS35	CWFS35CT521	0.8	T521	500	—	740	—	1780

### Packaging


(1) AMMO Pack  
(Symbol:A) Standard




(2) Reel (Symbol: R)



### T-Type



### L-Type



□ T.C.R. \* 4 The same taping applicable also to CW-P, CW-X and CW-H  
\*\* ±0.1% and ±0.25% not available in reel packaging

### T-Type

Packaging Style	Dimensions (mm)				Accumulated Tolerance
	W	P	A	l <sub>1</sub> -l <sub>2</sub>	
T26 <sup>6</sup>	26 <sup>+0.2</sup> <sub>-0</sub>	5.00±0.3	39±1.0	0.2Max. <sup>5</sup>	250.0±3mm/P×50
	26 <sup>+1</sup> <sub>-0</sub>	5.00±0.3	39±1.0	1.0Max.	100.0±2mm/P×20
T52 <sup>6</sup>	52±1	5.08±0.38	65±1.0	1.0Max.	101.6±2mm/P×20
T521	52±1	10.16±0.80	65±1.0	1.0Max.	203.2±3mm/P×20
T631	63±1	10.16±0.80	—	1.0Max.	203.2±3mm/P×20

\*5 Applied to CFS1/4 (CFPS1/4) T26 Only

\*6 Contact us for LP and SDT series

### L-Type

Type	Dimensions (mm)			
	H±1	W	d	h <sub>1</sub> , h <sub>2</sub>
MOS <sup>2</sup>	1 □L52	25.5	1.20~1.45	0.8
	2 □L521	36.0		0.8
	3 □L631	42.5		0.8
SPR <sup>3</sup>	1/2 □L52	26.0	1.17~1.40	0.65
	1 □L52	25.5		0.8
	2 □L521	36.0		0.8
	3 □L631	42.5		0.8
CFP	1/4 □L52	H1: 24.5±1	1.17~1.4	0.65
CW	1/2 □L52	26.0	1.05~1.35	0.6
CW	1 □L52	27.5	1.20~1.40	0.8

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/28/18



## radial tapings

(mm)


VT					VT					VTE				
Radial Type Name	Radial Lead ød	AMMO (pcs)	Reel (pcs)	Weight g/AMMO	Radial Type Name	Radial Lead ød	AMMO (pcs)	Reel (pcs)	Weight g/AMMO	Radial Type Name	Radial Lead ød	AMMO (pcs)	Reel (pcs)	Weight g/AMMO
MFS1/2□CVT	0.6	2000	2500	750	MFS1/4□CVT	0.45	3000	3000	620	MFS1/2□CVTE	0.6	2000	2500	750
MF1/4□CVT	0.6	2000	2500	750	CFS1/4 CVT	0.45	3000	3000	720	MF1/4□CVTE	0.6	2000	2500	750
RNS1/8□CVT	0.6	2000	2500	750	SPR1/4 CVT*	0.45	3000	3000	720	RNS1/8□CVTE	0.6	2000	2500	750
J1/4Z CVT*	0.6	2000	2500	670						MOS1/2 CVTE	0.6	2500	2500	930
CF1/4 CVT	0.6	2000	2500	720						SPR1/2 CVTE	0.6	2500	2500	930
CFS1/2 CVT	0.6	2000	2500	800						CF1/4 CVTE	0.6	2500	2500	900
CFP1/4 CVT*	0.6	2000	2500	720						CFS1/2 CVTE	0.6	2500	2500	1000
CFPS1/2 CVT*	0.6	2000	2500	800						RF25 CVTE	0.6	2000	2500	750
RF25 CVT*	0.6	2000	2500	750										
VTP					VTF									
Radial Type Name	Radial Lead ød	AMMO (pcs)	Reel (pcs)	Weight g/AMMO	Radial Type Name	Radial Lead ød	AMMO (pcs)	Reel (pcs)	Weight g/AMMO					
MOS1/2 CVTP	0.6	2000	2500	740	CW1/2 CVTP*	0.6	2000	—	750					
MOS1 CVTP	0.6	1500	—	1110	CW1 CVTP*	0.8	1000	—	740					
MOS2 CVTP	0.65	1000	—	1080	CW2 CVTP*	0.8	1000	—	1080					
SPR1/2 CVTP	0.6	2000	2500	740	J1/4Z CVTP*	0.6	2000	2500	670					
SPR1 CVTP	0.6	1000	—	740	MF1/4□CVTP	0.6	2000	2500	750					
SPR2 CVTP	0.65	1000	—	1080	RNS1/8□CVTP	0.6	2000	2500	750					
MFS1/2□CVTP	0.6	2000	2500	750	CF1/4 CVTP	0.6	2000	2500	740					
					CFS1/2 CVTP	0.6	2000	2500	800					
					CFP1/4 CVTP	0.6	2000	2500	740					
					CFPS1/2 CVTP	0.6	2000	2500	800					
					RF25 CVTP	0.6	2000	2500	750					
MT					MHT					FT				
Radial Type Name	Radial Lead ød	AMMO (pcs)	Reel (pcs)	Weight g/AMMO	Radial Type Name	Radial Lead ød	AMMO (pcs)	Reel (pcs)	Weight g/AMMO	Radial Type Name	Radial Lead ød	AMMO (pcs)	Reel (pcs)	Weight g/AMMO
MFS1/4□CMT	0.45	3000	—	620	CFS1/4 CMHT	0.45	3000	—	720	BPR26 CFT	0.6	500	—	790
CFS1/4 CMT	0.45	3000	3000	720	CFPS1/4 CMHT	0.6	3000	—	720	BPR58 CFT	0.8	500	—	1940
CFPS1/4 CMT	0.45	3000	3000	720	RF16 CMHT	0.45	3000	—	240					
J1/6Z CMT	0.5	2000	—	450										

□T.C.R. \* The insulated coating on the lead wire is not available.  
Also for MOSX, SPRX types, radial taping in the same shape as MOS, SPR types is applicable.


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. 12/13/17

## radial tapings

(mm)

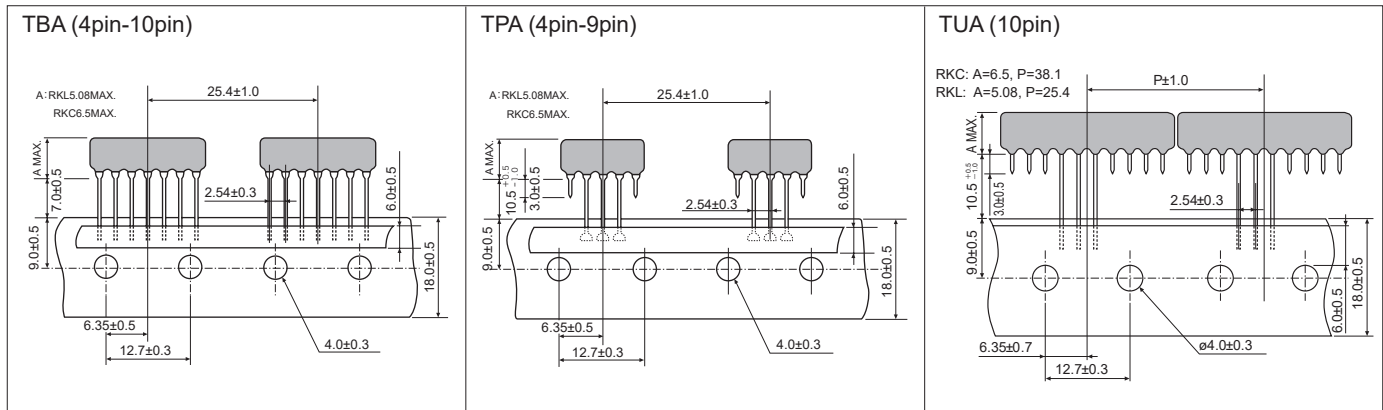

Radial Type Name	AMMO (pcs)	Weight g/AMMO	Radial Type Name	AMMO (pcs)	Weight g/AMMO	Radial Type Name	AMMO (pcs)	Weight g/AMMO
RKC TBA	1000	850(9Pin)	RKC TPA	1000	800(9Pin)	RKC TUA	1000	850(9Pin)
RKL TBA	1000	850(9Pin)	RKL TPA	1000	800(9Pin)	RKL TUA	1000	850(9Pin)

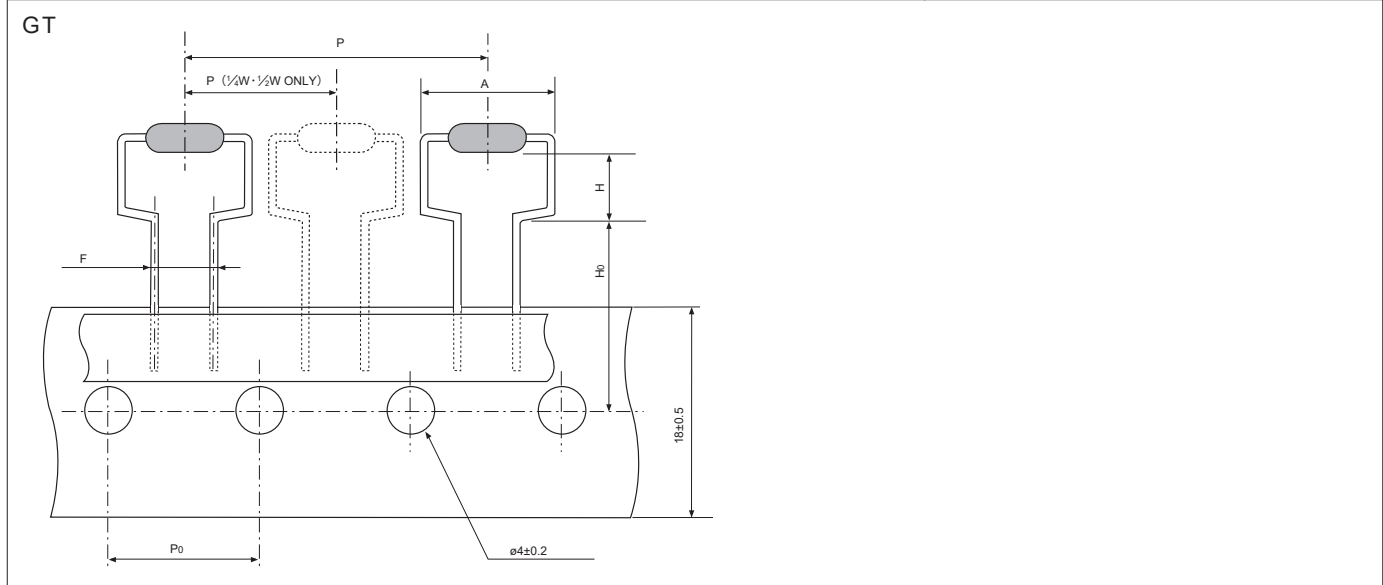

Radial Type Name	Radial Lead ød	AMMO (pcs)	Weight g/AMMO	F	P	P0	H	H0	AMax.		
MOS1/2CGT	0.6	2000	740	5±0.5	12.7±1.0	12.7±0.3	6.5 <sup>+0.6</sup> <sub>-0</sub>	16±0.5	12		
MOS1CGT	0.8	1000	730	7.5 <sup>+0.8</sup> <sub>-0.2</sub>	30±1.0	15±0.3	6.5 <sup>+1.0</sup> <sub>-0</sub>	19±0.7	14.5		
MOS1CGT4	0.8	1000	700				4.0 <sup>+1.0</sup> <sub>-0</sub>				
MOS2CGT	0.8	500	580				7.5 <sup>+1.0</sup> <sub>-0</sub>				
MOS2CGT4	0.8	500	560				4.0 <sup>+1.0</sup> <sub>-0</sub>				
MOS3CGT	0.8	500	910	7.5±0.5			8.5 <sup>+1.0</sup> <sub>-0</sub>	19±1.0	21		
MOS3CGTS <sup>1</sup>	0.8	500	910				5.5±1.0				
SPR1/2CGT	0.6	2000	740				6.5 <sup>+0.6</sup> <sub>-0</sub>			16±0.5	12
SPR1CGT	0.8	1000	770	7.5 <sup>+0.8</sup> <sub>-0.2</sub>	30±1.0	15±0.3	6.5 <sup>+1.0</sup> <sub>-0</sub>	19±0.7	14.5		
SPR2CGT	0.8	500	540				7.5 <sup>+1.0</sup> <sub>-0</sub>				
SPR3CGT	0.8	500	910				8.5 <sup>+1.0</sup> <sub>-0</sub>				
CFP1/4CGT	0.65	2000	720				6.5 <sup>+0.6</sup> <sub>-0</sub>			16±0.5	12
CFPS1/2CGT	0.8	1500	600	5±0.5	12.7±1.0	12.7±0.3	6.5 <sup>+0.6</sup> <sub>-0</sub>	16±0.5	12		
CW1HCGT	0.8	1000	920	7.5 <sup>+0.8</sup> <sub>-0.2</sub>	30±1.0	15±0.3	6.5 <sup>+1.0</sup> <sub>-0</sub>	19±0.7	14.5		
RF50CGT	0.8	1000	730								
RF1CGT	0.8	1000	770								
RF2CGT	0.8	500	1820							8.5 <sup>+1.0</sup> <sub>-0</sub>	21
CW2CGT	0.8	500	1080							7.5 <sup>+1.0</sup> <sub>-0</sub>	17.5
CW3CGT	0.8	500	1820							8.5 <sup>+1.0</sup> <sub>-0</sub>	21

□ T.C.R.

Also for MOSX, SPRX types, radial taping in the same shape as MOS, SPR types is applicable. <sup>1</sup>Sprocket hole position is different from above image. Please contact KOA.


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. 11/15/18

forming (not available taping)

Forming Style	Forming Type Name	Forming Dimension (mm)				Weight g/100pcs	Basic Unit (pcs)	Straight Type Name
		P±1	H3±1orH5	H4±1orH6	d			
<b>L Forming</b> 	CW1/2CL10A (CW1SCL10A)	10.0	5.3	4.5	0.6	24	2000	CW1/2 (CW1S)
	CW1CL12.5A (CW1PCL12.5A) (CW1HCL12.5A)	12.5	6.5	4.0	0.8	56	2000	CW1 (CW1P) (CW1H)
	CW1CL15A (CW1PCL15A) (CW1HCL15A)	15.0	5.3	4.5	0.8	56	2000	CW1 (CW1P) (CW1H)
	CW2CL15A (CW2PCL15A) (CW2HCL15A)	15.0	7.0	4.5	0.8	84	2000	CW2 (CW2P) (CW2H)
	CW2CL20A (CW2PCL20A) (CW2HCL20A)	20.0	8.0	4.5	0.8	84	2000	CW2 (CW2P) (CW2H)
	CW3CL20A (CW3PCL20A) (CW3HCL20A)	20.0	8.0	4.0	0.8	160	1000	CW3 (CW3P) (CW3H)
	CW3CL25A (CW3PCL25A) (CW3HCL25A)	25.0	7.0	4.5	0.8	160	1000	CW3 (CW3P) (CW3H)
	CW5CL30A	30.0	8.5	4.5	0.8	524	500	CW5
	CW5CL35A	35.0	5.5	4.5	0.8	524	500	CW5
	MOS1/2CL10A (MOSX1/2CL10A)	10.0	5.3	4.0	0.6	23	2000	MOS1/2 (MOSX1/2)
	MOS1CL12.5A (MOSX1CL12.5A)	12.5	7.0	4.0	0.8	31	2000	MOS1 (MOSX1)
	MOS1CL15A (MOSX1CL15A)	15.0	6.5	4.0	0.8	31	2000	MOS1 (MOSX1)
	MOS2CL15A (MOSX2CL15A)	15.0	7.0	4.0	0.8	71	2000	MOS2 (MOSX2)
	MOS2CL20A (MOSX2CL20A)	20.0	9.0	4.0	0.8	71	2000	MOS2 (MOSX2)
	MOS3CL20A (MOSX3CL20A)	20.0	8.0	4.0	0.8	146	1000	MOS3 (MOSX3)
	MOS3CL25A (MOSX3CL25A)	25.0	7.0	4.0	0.8	146	1000	MOS3 (MOSX3)
	MOS5CL30A (MOSX5CL30A)	30.0	8.5	4.0	0.8	524	500	MOS5 (MOSX5)
	MOS5CL35A (MOSX5CL35A)	35.0	5.5	4.0	0.8	524	500	MOS5 (MOSX5)
	SPR1/2CL10A (SPRX1/2CL10A)	10.0	5.3	4.0	0.6	23	2000	SPR1/2 (SPRX1/2)
	SPR1CL12.5A (SPRX1CL12.5A)	12.5	6.5	4.0	0.8	54	2000	SPR1 (SPRX1)
	SPR1CL15A (SPRX1CL15A)	15.0	5.3	4.0	0.8	54	2000	SPR1 (SPRX1)
	SPR2CL15A (SPRX2CL15A)	15.0	7.0	4.0	0.8	71	2000	SPR2 (SPRX2)
	SPR2CL20A (SPRX2CL20A)	20.0	9.0	4.0	0.8	71	2000	SPR2 (SPRX2)
	SPR3CL20A (SPRX3CL20A)	20.0	8.0	4.0	0.8	141	1000	SPR3 (SPRX3)
	SPR3CL25A (SPRX3CL25A)	25.0	7.0	4.0	0.8	141	1000	SPR3 (SPRX3)
	SPR5CL30A (SPRX5CL30A)	30.0	8.5	4.0	0.8	456	500	SPR5 (SPRX5)
	SPR5CL35A (SPRX5CL35A)	35.0	5.5	4.0	0.8	456	500	SPR5 (SPRX5)
	RCR50(+)CL15A	15.0	5.3	4.5	0.7	34	2000	RCR50 (+)
	RCR50ENCL15A	15.0	5.3	4.5	0.7	34	2000	RCR50EN
	RCR60CL15A	15.0	5.3	4.5	0.7	34	2000	RCR60
	RCR75CL15A	15.0	7.0	4.5	0.8	69	2000	RCR75
	RCR100CL25A	25.0	7.0	4.0	0.8	142	1000	RCR100
	RK1/4 CL10A	10.0	5.3	4.5	0.6	23	1000	RK1/4
	RK1 CL20A	20.0	8.8	4.5	0.8	146	1000	RK1
	CFP1/4CL10A	10.0	6.5	4.5	0.65	23	1000	CFP1/4
	CFPB1/2CL12.5A	12.5	6.5	4.5	0.65	44	1000	CFPB1/2
	RF25CL10A	10.0	5.35	5.0	0.6	23	2000	RF25
	RF50CL12.5A	12.5	6.0	5.2	0.6	29	2000	RF50
	RF50CL15A	15.0	6.0	5.3	0.6	29	2000	RF50
	RF1CL12.5A	12.5	6.5	4.8	0.8	46	2000	RF1
	RF1CL15A	15.0	5.3	4.5	0.8	46	2000	RF1
	RF1CL20A	20.0	5.3	4.5	0.8	46	2000	RF1
	RF2CL20A	20.0	8.0	5.0	0.8	141	1000	RF2
	RF2CL25A	25.0	7.0	4.5	0.8	141	1000	RF2
	<b>U Forming</b> 	MFS1/4 CU	-	5.5Max.	15.0±1.0	0.45	14	2000
CFS1/4CU		-	5.5Max.	15.0±1.0	0.45	12	2000	CFS1/4
<b>U Forming</b> 	MF1/4 CU	-	9.5Max.	28.0±3.0	0.6	23	2000	MF1/4
	MFP1/4 CU	-	9.5Max.	28.0±3.0	0.6	23	2000	MFP1/4
	RK1/4 CU	-	9.5Max.	30.0±3.0	0.6	23	1000	RK1/4
	RK1/4 CUC-5	-	9.5Max.	5.0±1.0	0.6	23	1000	RK1/4
	CF1/4CUCL	-	10.0Max.	10.0±1.0	0.6	23	1000	CF1/4
CFS1/2CU	-	9.5Max.	30.0±3.0	0.6	44	1000	CFS1/2	
<b>U Forming</b> 	MOS1CU (MOSX1CU)	-	19.5±3.0	15.0Min.	0.8	23	1000	MOS1 (MOSX1)
	MOS2CU (MOSX2CU)	-	22.0±3.0	15.0Min.	0.8	71	1000	MOS2 (MOSX2)
	MOS3CU (MOSX3CU)	-	25.0±3.0	15.0Min.	0.8	146	1000	MOS3 (MOSX3)
	SPR1CU (SPRX1CU)	-	19.5±3.0	15.0Min.	0.8	54	1000	SPR1 (SPRX1)
	SPR2CU (SPRX2CU)	-	22.0±3.0	15.0Min.	0.8	93	1000	SPR2 (SPRX2)
SPR3CU (SPRX3CU)	-	25.0±3.0	15.0Min.	0.8	141	1000	SPR3 (SPRX3)	
<b>UCL Forming</b> 	MOS1CUCL (MOSX1CUCL)	-	13.0±1.0	3.5±1.0	0.8	23	1000	MOS (X)1
	MOS2CUCL (MOSX2CUCL)	-	14.5±1.0	3.5±1.0	0.8	71	1000	MOS (X)2
	MOS3CUCL (MOSX3CUCL)	-	20.0Max.	4.0±1.0	0.8	146	1000	MOS (X)3

□T.C.R.

## forming (not available taping)

Forming Style	Forming Type Name	Forming Dimension (mm)					Weight g/100pcs	Basic Unit (pcs)	Straight Type Name
		P±1	H1	H2	e Max.	d			
 <p>M Forming</p>	MFS1/4□CM5F	5.0	-	5.0±1.0	2.0	0.45	14	2000	MFS1/4
	MFS1/4□CM5R	5.0	10.0±1.0	-	2.0	0.45	14	2000	MFS1/4
	MFS1/4□CM5W	5.0	-	15.0	2.0	0.45	14	2000	MFS1/4
	MFS1/2□CM10R	10.0	-	5.0±1.0	2.0	0.6	23	2000	MFS1/2
	MF1/4□CM10F	10.0	-	5.0±1.0	2.0	0.6	23	2000	MF1/4
	MF1/4□CM12.5R	12.5	10.0±1.0	-	2.0	0.6	23	2000	MF1/4
	MF1/2□CM12.5R	12.5	10.0±1.0	-	2.0	0.6	41	2000	MF1/2
	MF1/2□CM15R	15.0	10.0±1.0	-	2.0	0.6	41	2000	MF1/2
	MFP1/4□CM10F	10.0	-	5.0±1.0	1.7	0.6	24	2000	MFP1/4
	MFP1/4□CM12.5R	12.5	10.0±1.0	-	1.7	0.6	24	2000	MFP1/4
MFP1/2□CM12.5R	12.5	10.0±1.0	-	2.0	0.6	41	2000	MFP1/2	
MFP1/2□CM15R	15.0	10.0±1.0	-	2.0	0.6	41	2000	MFP1/2	
RCR16CM5F	5.0	-	5.0±1.0	2.0	0.45	14	2000	RCR16	
RCR25CM10F	10.0	-	5.0±1.0	2.0	0.6	23	2000	RCR25	
RCR25ENCM10F	10.0	-	5.0±1.0	2.0	0.6	23	2000	RCR25EN	
RCR50(+ )CM15F	15.0	-	5.0±1.0	2.0	0.7	40	2000	RCR50	
RCR50CM15F	15.0	-	5.0±1.0	2.0	0.7	40	2000	RCR50+	
RCR60CM15F	15.0	-	5.0±1.0	2.0	0.7	40	2000	RCR60	
RCR100CM20E	20.0	-	4.6±1.0	2.0	0.8	120	1000	RCR100	
RK1/4□CM10F	10.0	-	5.0±1.0	1.7	0.6	21	1000	RK1/4	
RK1/4□CM10R	10.0	-	10.0±1.0	1.7	0.6	21	1000	RK1/4	
RK1/4□CM12.5R	12.5	-	10.0±1.0	1.7	0.6	23	1000	RK1/4	
RK1/2□CM15F	15.0	-	5.0±1.0	2.0	0.6	40	1000	RK1/4	
RK1/2□CM12.5F	12.5	-	5.0±1.0	2.0	0.6	37	1000	RK1/2	
RK1/2□CM15R	15.0	-	10.0±1.0	2.0	0.6	37	1000	RK1/2	
CFS1/4CM5F	5.0	5.9±1.0	5.0±1.0	1.5	0.45	12	2000	CFS1/4	
CF1/4CM10H	10.0	6.0±1.0	4.8±1.0	1.7	0.6	23	1000	CF1/4	
CF1/4CM12.5H	12.5	6.0±1.0	4.8±1.0	1.7	0.6	23	1000	CF1/4	
CFB1/2CM12.5K	12.5	7.0±1.0	5.0±1.0	1.7	0.7	44	1000	CFB1/2	
CFS1/2CM10H	10.0	6.0±1.0	4.8±1.0	1.7	0.6	26	1000	CFS1/2	
CFPS1/4CM5F	5.0	5.9±1.0	5.0±1.0	1.5	0.45	12	2000	CFPS1/4	
CFP1/4CM10H	10.0	6.0±1.0	4.8±1.0	1.7	0.6	23	1000	CFP1/4	
CFPB1/2CM12.5K	12.5	7.0±1.0	5.0±1.0	2.0	0.7	44	1000	CFB1/2	
J1/6ZCM7.5H	7.5	-	5.0 <sup>+2.0</sup> <sub>-3.0</sub>	1.5	0.5	5	1000	J1/6Z	
J1/4ZCM10H	10.0	-	5.0 <sup>+2.0</sup> <sub>-3.0</sub>	1.5	0.6	9	1000	J1/4Z	
RF16CM5F	5.0	-	5.0±1.0	2.0	0.45	12	2000	RF16	
RF25CM10X	10.0	16.0±1.0	14.8±1.0	1.5	0.6	23	2000	RF25	
RF50CM12.5E	12.5	-	4.5±1.0	1.5	0.6	29	2000	RF50	
RF1CM15F	15.0	-	5.0±1.0	1.5	0.8	46	2000	RF1	
MO1/2CM15F (MOX1/2CM15F)	15.0	-	5.0±1.0	2.0	0.7	40	2000	MO1/2 (MOX1/2)	
MO1CM15S (MOX1CM15S)	15.0	-	11.5±1.5	2.0	0.8	75	2000	MO1 (MOX1)	
MO2CM20E (MOX2CM20E)	20.0	-	4.6±1.0	2.0	0.8	120	1000	MO2 (MO2)	
MO2CM25C (MOX2CM25C)	25.0	-	3.5±1.0	2.0	0.8	120	1000	MO2 (MOX2)	
MOS1/2CM10C (MOSX1/2CM10C)	10.0	-	3.5±1.0	2.0	0.6	23	2000	MOS (X) 1/2	
MOS1/2CM10F (MOSX1/2CM10F)	10.0	-	5.0±1.0	2.0	0.6	23	2000	MOS (X) 1/2	
MOS1CM12.5C (MOSX1CM12.5C)	12.5	-	3.5±1.0	2.0	0.8	31	2000	MOS (X) 1	
MOS1CM12.5D (MOSX1CM12.5D)	12.5	-	4.0±1.0	2.0	0.8	31	2000	MOS (X) 1	
MOS1CM15F (MOSX1CM15F)	15.0	-	5.0±1.0	2.0	0.8	31	2000	MOS (X) 1	
MOS1CM15J (MOSX1CM15J)	15.0	-	6.3±1.0	2.0	0.8	31	2000	MOS (X) 1	
MOS1CM15S (MOSX1CM15S)	15.0	-	11.0±1.0	2.0	0.8	31	2000	MOS (X) 1	
MOS2CM15C (MOSX2CM15C)	15.0	-	3.5±1.0	2.0	0.8	71	2000	MOS (X) 2	
MOS2CM15E (MOSX2CM15E)	15.0	-	4.5±1.0	2.0	0.8	71	2000	MOS (X) 2	
MOS2CM16D (MOSX2CM16D)	16.0	-	4.0±1.0	2.0	0.8	71	2000	MOS (X) 2	
MOS2CM20D (MOSX2CM20D)	20.0	-	4.0±1.0	2.0	0.8	71	2000	MOS (X) 2	
MOS2CM20U (MOSX2CM20U)	20.0	-	13.5±1.5	2.0	0.8	71	2000	MOS (X) 2	
MOS3CM20E (MOSX3CM20E)	20.0	-	4.6±1.0	2.0	0.8	120	1000	MOS (X) 3	
MOS3CM26E (MOSX3CM26E)	26.0	-	4.7±1.0	2.0	0.8	120	1000	MOS (X) 3	
MOS5CM30U (MOSX5CM30U)	30.0	-	13.0±1.0	2.0	0.8	456	500	MOS (X) 5	
SPR1/2CM10F	10.0	-	5.0±1.0	2.0	0.6	23	2000	SPR1/2	
SPR1CM12.5D	12.5	-	4.0±1.0	2.0	0.8	44	2000	SPR1	
SPR1CM15F	15.0	-	5.0±1.0	2.0	0.8	44	2000	SPR1	
SPR2CM15E	15.0	-	4.5±1.0	2.0	0.8	71	2000	SPR2	
SPR3CM20E	20.0	-	4.6±1.0	2.0	0.8	120	1000	SPR3	
SPRX1/2CM10F	10.0	-	5.0±1.0	2.0	0.6	23	2000	SPRX1/2	
SPRX1CM12.5D	12.5	-	4.0±1.0	2.0	0.8	44	2000	SPRX1	
SPRX1CM15F	15.0	-	5.0±1.0	2.0	0.8	44	2000	SPRX1	
SPRX2CM15E	15.0	-	4.5±1.0	2.0	0.8	71	2000	SPRX2	
SPRX3CM20E	20.0	-	4.6±1.0	2.0	0.8	120	1000	SPRX3	

□T.C.R.

## minimum ordered quantity

### Chip Components

Type	Basic Unit/Bag	Quantity /Box	Taping
RK73B, RK73H	1F~W3A2	1,000	—
RK73G	1H~2B	1,000	—
RK73Z	1F~W3A	1,000	—
RN73, RN73H	1E~2E	200	—
WK73, WU73 WG73	1E~3A3	1,000	—
XR73	1H, 1E	1,000	—
SR73	1H~W3A2	1,000	—
UR73, UR73D, UR73V, UR73VD	1E~3A	1,000	—
HV73	1J~3A	1,000	—
SG73, SG73P, SG73S, SG73G	1E~W3A	1,000	—
PSI, PSB, PSE, PSF, PSJ, PSG, PSL		100	—
TLR, TLRH	1E, 1J, 2A, 2BP, 2B, 2H, 3A, 3AW, 2BW, 2HW, 3AP, 3APS	100	—
SL, SLN	07, 1, 2, W07, W1, 3, 5	100	—
TSL	1	100	—
CSR	1, 2	100	—
BLR	1	1,000	2,000
LR72		2,000	2,000
RD41	2ES	2,000	40,000
	2E	2,000	10,000
RN41	2A	5,000	50,000
	2ES	2,000	40,000
	2D	2,000	36,000
	2E, 2H	2,000	10,000
RM41	2D	2,000	36,000
	2H	2,000	10,000
CC	12M	2,000	40,000
	25	2,000	10,000
CPCN	1/2	1,000	10,000
	1, 2N, 2NS	1,000	5,000
	3	500	2,000
RF73	1J~3A	200	—
NT73	1J~2B	200	—
LT73, LT73V	2A, 2B	200	—
LA73	1J~2B	200	—
LP73	1J	1,000	—
	2A, 2B	500	—
SDT73H/V/S	2B	100	—
CNN	2A	100	—
CN	1E~2B	100	—
CN-A, CN-K	1E~1F	100	—
CN-RT CN-KRT	1F, 1J	10,000	—
	2A~2B	8,000	—
	1E	20,000	—
CND	1J, 2A, 2B	100	—
CND-K	1J	100	—
CNB	2B, 2E	100	—
KQC	0402, 0603	200	—
HS		81	384

Type	Basic Unit/Bag	Quantity /Box	Taping
KQT	0402	200	—
KQ	0603, 0805, 1008	200	—
LPC	4545, 4235	100	—
	4045	100	—
TF	10B, 16S, 16A, 16VN	100	—
CCP	2B, 2E	100	—
CCF	1N, 1F	100	—
NV73	1H • 1E	—	—
NV73, NV73DL	1J~2L	1,000	—
NV73DS	2L	500	—
RCU		—	—
RCT		—	—
RCS		1,000	—
RCW		—	—

Please refer to product pages for taping quantities.

### Discrete Components

Type	Basic Unit/Bag	Taping
CF (CFP)	S1/4	2,000
	1/4, B1/2, S1/2	1,000
MF (MFP)	S1/4	2,000
	S1/2, 1/4, 1/2	1,000
RNS	1/8~1	1,000
RK	1/4~1	1,000
RCR	16, 25	2,000
	50, 50+, 60, 75	2,000
	100	1,000
HPC	1/2	3,000
	1	1,000
	2, 3	1,000
	4, 5	500
PCF	1/2	2,000
	1	1,000
RF	2	500
	16~1	2,000
RF25CC	2	1,000
MOS (MOSX)		2,000
	1/2~2	2,000
	3, 1U, 2U	1,000
SPR (SPRX)	5	500
	1/4	2,000
	1/2~2	2,000
	3, 1U, 2U	1,000
	5	500
CW	1/2~3	1,000
	5	500

## Discrete Components (continued)

Type	Basic Unit/Bag	Taping	
BPR	26, 28	1,000	O
	38	1,000	—
	58	1,000	O
	108, 55, 77	400	—
LR	04~23	1,000	—
BGR, BWR, BSR, WF	BGR, BWR, BSR	WF	
	5N	(1500) 500 (1500)	—
	7N	(700) 250 (700)	—
	10N	(600) 200 (600)	—
BGR, BWR, BSR (Straight type)	1	500 (700)	—
	2, 3	(1000)	—
	5	(700)	—
	7, 10	(500)	—
	15	(320)	—
BGR, BSR (Lug terminal)	5~7, 10X, 10YS	200	—
	10Y, 10Z, 10H, 15~20	100	—
Z	16	2,000	O
	25	1,000	O
J1/6Z, J1/4Z	1,000	O	
JLT	—	—	O
RK92	1,000	—	
RKL, RKC	3pin	1,000	—
	4~5pin	1,000	O
	6~9pin	1,000	O
	10pin	1,000	—
	11~17pin	1,000	—
	4~8pin	1,000	—
RKH	9pin	1,000	—
	10~13pin	1,000	—

\* ( ) is flat container


Type	Basic Unit/Bag	Quantity /Box	Taping	
MRS	1/8~1/3	100	5000	—
GS	1/4	—	1000	—
	1/2	—	2000	—
	1	—	2000	—
	2	—	500	—
	3	—	500	—
	5	—	500	—
	7	—	250	—
	10	—	250	—
LF	1/8, 1/4, 1/2	100	2000	O
	1/16	100	2000	O
LP	1/8	100	1000	O
	A	100	2500	O
SDT101	B	100	2500	—
	SDT310	100	—	—
PSN•PV•PSO•PN•PWW•PAP		1	—	—
AFS		1	—	—
RW	1/2	20	1000	—
	1	20	1000	—
	2~7	20	500	—
	10	20	300	—
CR	100	1000	—	
MRP	3 pin	100	3000	—

Please refer to product pages for taping quantities.



## SIP resistor network taping—TBA style

For KOA type RKL & RKC networks with 4 to 9 pins

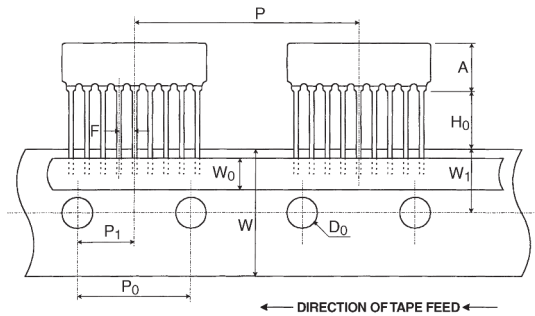


### Leaded Resistors (TBA Style)

Type	Dimensions (mm)
A	RKL: 5.0 max.-RKC: 6.5 max.
P	25.4 ± 1.0
P <sub>0</sub>	12.7 ± 0.3
P <sub>1</sub>	6.35 ± 0.5
F	2.54 ± 0.3
W	18.0 ± 0.5
W <sub>0</sub>	6.0 ± 0.5
W <sub>1</sub>	9.0 ± 0.5
H <sub>0</sub>	7.0 ± 0.5
D <sub>0</sub>	4.0 ± 0.3


## SIP resistor network taping—TUA style

For KOA type RKL & RKC 10-pin networks

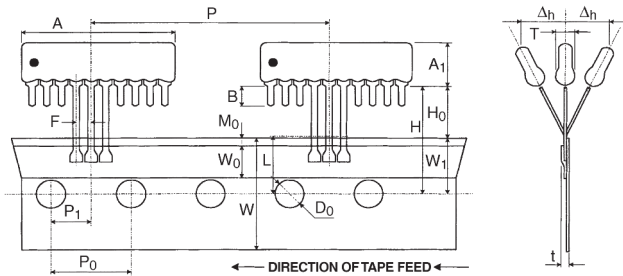

### Leaded Resistors (TUA Style)

Type	Dimensions (mm)
A	25.40 max.
T	2.5 max.
A <sub>1</sub>	5.0 max.
B	3 ± 0.5
P	RKL: 25.4, RKC: 38.1±1.0
P <sub>0</sub>	12.7 ± 0.3
P <sub>1</sub>	6.35 ± 0.7
Δh	0 ± 2.0
W	18 ± 0.5
W <sub>0</sub>	6 ± 0.5
W <sub>1</sub>	9 ± 0.5
H	19.5 ± 0.5
H <sub>0</sub>	10.5 ± 0.5
D <sub>0</sub>	4 ± 0.3
t	0.7 ± 0.2
L	11 max.
M <sub>0</sub>	1.0 ± 1.0

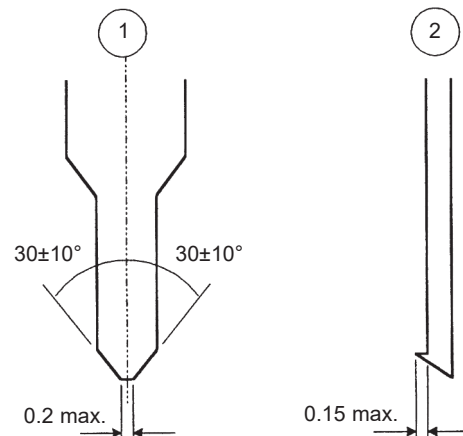


\*21 Holes Length = 254 ± 1mm

Application: Universal radial lead component insertion machine

### SIP resistor network taping—TPA style

For KOA type RKL & RKC networks with 4 to 9 pins

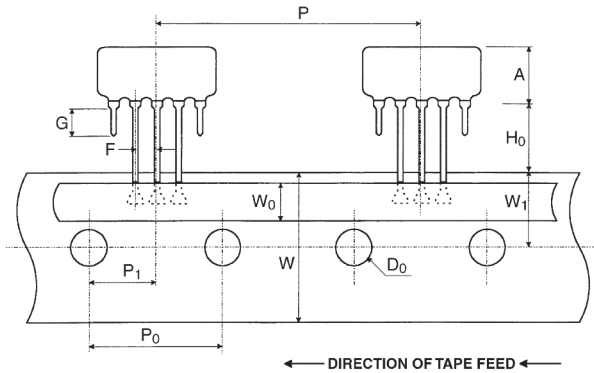


#### Leaded Resistors (TPA style)

Type	Dimensions (mm)
A	RKL: 5.0 max.-RKC: 6.5 max.
P	25.4 ± 1.0
P <sub>0</sub>	12.7 ± 0.3
P <sub>1</sub>	6.35 ± 0.5
F	2.54 ± 0.3
W	18.0 ± 0.5
W <sub>0</sub>	6.0 ± 0.5
W <sub>1</sub>	9.0 ± 0.5
H <sub>0</sub>	10.5 ± 0.5/1.0
D <sub>0</sub>	4.0 ± 0.3
G	3.0 ± 0.5

### SIP resistor network taping—TPA style

For KOA TPA style taping

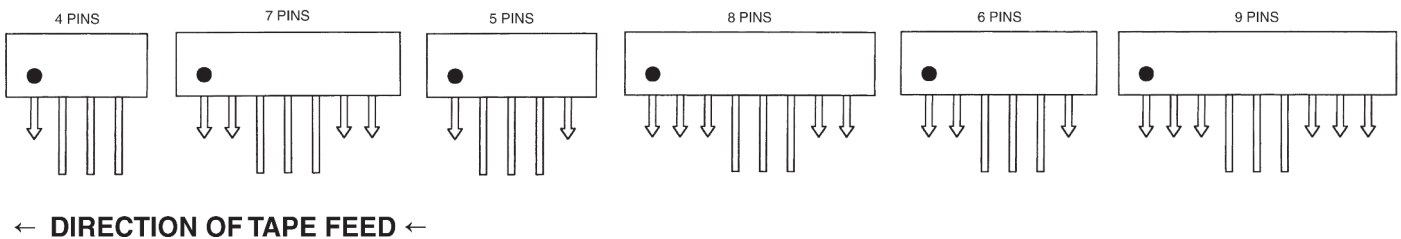


### SIP resistor network packaging—STP & STB style packaging for stick (magazine) case

Resistor Networks - RKL & RKC

Type RKC, RKL	STP Pieces Per Stick		STB Pieces Per Stick		Sticks Per Box STP & STB
	RKC	RKL	RKC	RKL	
4 Pin	46	48	54	55	50
5 Pin	37	38	42	44	50
6 Pin	31	32	34	37	50
7 Pin	27	27	30	31	50
8 Pin	23	24	25	27	50
9 Pin	21	21	23	24	50
10 Pin	19	19	21	22	50
11 Pin	17	17	19	20	50
12 Pin	15	16	18	18	50
13 Pin	14	—	16	—	50
14 Pin	13	—	15	—	50

Dimensions - mm (Inches)

Type	Length	Width	Height	
			RKL	RKC
STP	508 (20.0)	5.0 (0.20)	11.0 (0.43)	13.4 (0.53)
STB	580 (22.8)	3.8 (0.15)	12.5 (0.49)	13.4 (0.53)




## resistor networks

### Resistor Color Code Chart

Color	Significant Figure	Multiplier	Tolerance
Silver	–	$10^{-2}$	+10%
Gold	–	$10^{-1}$	+5%
Black	0	1	–
Brown	1	10	+1%
Red	2	$10^2$	+2%
Orange	3	$10^3$	–
Yellow	4	$10^4$	–
Green	5	$10^5$	+0.5%
Blue	6	$10^6$	+0.25%
Violet	7	$10^7$	+0.10%
Gray	8	$10^8$	+0.05%
White	9	$10^{-3*}$	–

\* The  $10^{-3}$  Multiplier is not an "Industry Standard" Multiplier

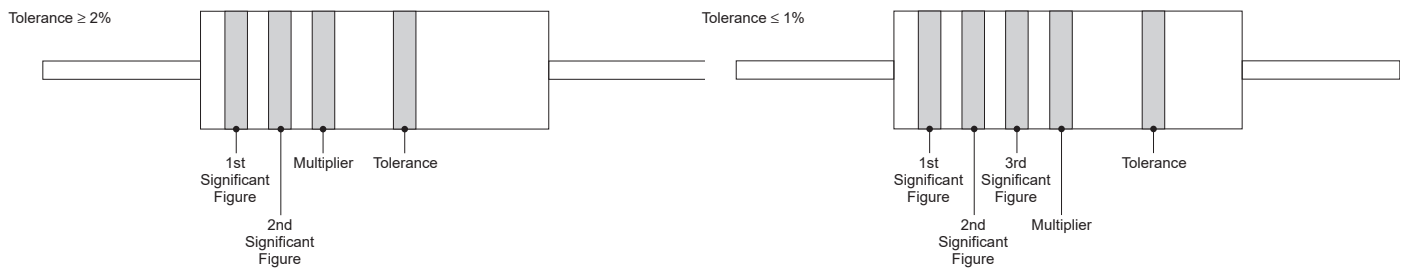


### surface mounted device style lead forming

#### Ratings


Type	Forming Type Name	Carrier Type	Forming Dimensions (mm)				Quantity/ Reel (pcs)	Weight (g)	
			P	T	A	d		Reel	NET/1000pcs
MOS (X) 1C	N14.5	TEB	14.5 ± 1	5.0 ± 0.5	4.8 ± 0.5	0.8	1000	700	350
MOS (X) 2C SPR(X) 2C RCR75C CW2C	N17	TEB	17.0 ± 1	6.0 ± 0.5	5.8 ± 0.5	0.8	1000	900	600
MOS (X) 3 SPR(X) 3 RCR100 CW3C	N20	TEG	20.0 ± 1	7.5 ± 1	6.5 ± 0.5	0.8	900	1,800	1,400

#### Forming Style

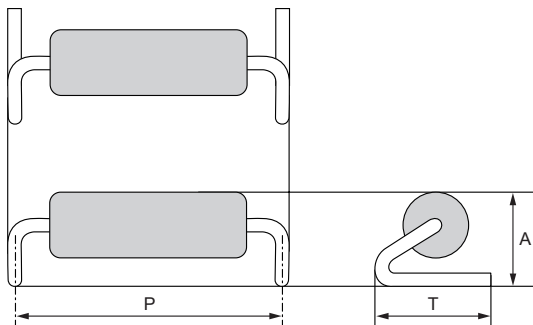


#### Packaging Specifications

Carrier tape: TEB (N14.5, N17)

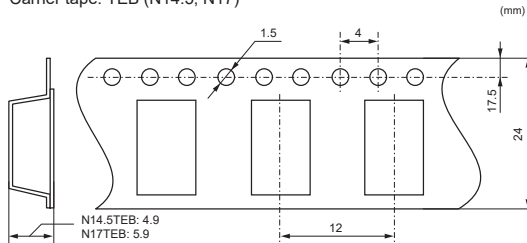


Carrier tape: TEG (N20)

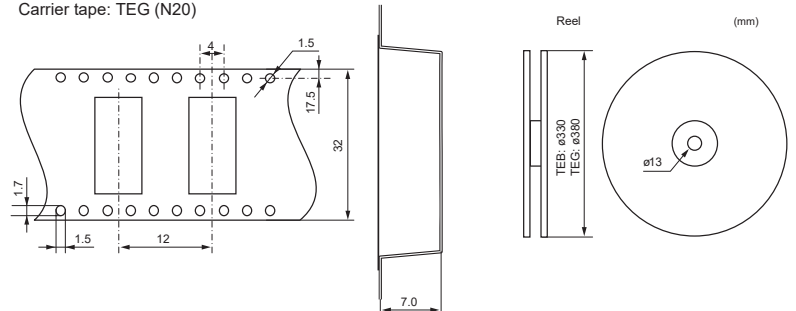

#### Recommended Pad Dimensions

Type	Forming Type Name	Forming Dimensions (mm)			
		A	B	C	D
MOS (X) 1C	N14.5TEB	12.5	16.5	7.0	2.0
MOS (X) 2C SPR(X) 2C RCR75C CW2C	N17TEB	14.6	19.4	8.0	2.4
MOS (X) 3 SPR(X) 3 RCR100 CW3C	N20TEG	17.6	22.4	9.5	2.4

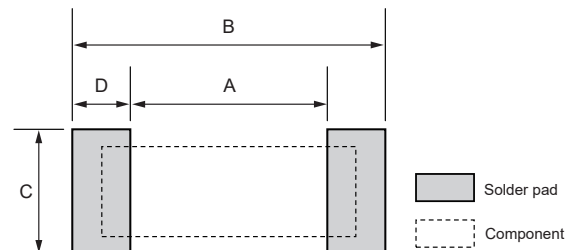

• Need a dedicated nozzle for automatic mounting.  
Please ask us before use.

### marking

KSE Part Designation		Color		Marking Type
		Body	Marking	
RK73F	1J (0603)	Black	None	None
	2A (0805)	Black	None	None
RK73B RK73B-RT XR73	1H (0201)	Black	None	None
	1E (0402)	Black	None	None
	1J (0603)	Black	White	3 Digits
	2A (0805)	Black	White	3 Digits
	2B (1206)	Black	White	3 Digits
	2E (1210)	Black	White	3 Digits
	2H, W2H (2010)	Black	White	3 Digits
	3A, W3A, W3A2, (2512)	Black	White	3 Digits
RK73Z RK73Z-RT	1H (0201), 1E (0402)	Green	None	None
	1F (01005)	Black	None	None
	1J (0603)	Black	White	0
	2A (0805)	Black	White	000
	2B (1206)	Black	White	000
	2E (1210)	Black	White	000
	2H (2010)	Black	White	000
	3A (2512)	Black	White	000
RK73H RK73H-RT	1F,1H	Black	None	None
	1E (0402)	Blue	None	None
	1J (0603)	Blue	Black	E-24 3 Digits, E-96 None
	2A (0805)	Blue	Black	4 Digits
	2B (1206)	Blue	Black	4 Digits
	2E (1210)	Blue	Black	4 Digits
	2H, W2H (2010)	Blue	Black	4 Digits
	3A, W3A, W3A2, (2512)	Blue	Black	4 Digits
RK73G RK73G-RT	1H (0201)	Black	None	None
	1E (0402)	Black	None	None
	1J (0603)	Dark Blue	Black	E-24 3 Digits E-96 None
	2A (0805)	Dark Blue	Black	4 Digits
RN73R	2B (1206)	Dark Blue	Black	4 Digits
	1E (0402)	Black	None	None
RN73H	1E	Black	—	None
	1J	Black	—	E-24 3 Digits E-96 4 Digits
RS73	2A, 2B, 2E	Black	—	4 Digits
	1J (0603)	Black	None	None
HV73(V)	1J	Black	None	None
HV73(V)-RT	2A-3A	Black	White	3 Digits
WK73	—	Black	White	3 Digits
WK73-RT	—	Black	White	3 Digits
WK731J	—	Black	None	None
WG73	—	Red	White	3 Digits
WU73	—	Black	None	None
UR73	(D) 1E	Indigo	None	None
	1J	Indigo	White	None
	(D) 3A	Indigo	White	4 Digits
	(D) 2A	Indigo	White	4 Digits
	(D) 2B	Indigo	White	4 Digits
	(D) 2H	Indigo	White	4 Digits

KSE Part Designation		Color		Marking Type
		Body	Marking	
UR73V (D)	2A/2B	Black	None	None
SG73	—	Red Wine	White	3 Digits
SG73P/S	1J-2E	Green	Black	3 Digits, E-24 Only
SG73P/S	1E	Black	None	None
SG73-RT	—	Red Wine	White	3 Digits
SG73P-RT	1E	Black	None	3 Digits
SG73S-RT	1E	Black	None	3 Digits
SG73P-RT	1J-2E	Green	Black	3 Digits, E-24 Only
SG73S-RT	1J-2E	Green	White	3 Digits, E-24 Only
CN	—	Black	White	3 Digits
	1E	Black	None	None
CN_A	—	Black	White	3 Digits
CN_K	1F	Black	None	None
	1E	Black	None	None
	1J	Black	White	3 Digits
CNB	—	Black	White	3 Digits + pin number
CND	—	Black	White	3 Digits
CNZ	—	Black	None	None
CNN	—	Green	White	2 Digits
SR73	1H	Black	None	None
	1E	Indigo	None	None
	1J	Indigo	—	1%: None 2%, 5%: 3 Digits
SR73-RT	2A ~ 3A2	Indigo	—	.5%, 1%: 4 Digits 2%, 5%: 3 Digits
	1J	Black	White	1%: 3 Digits
SR73-RT	2A/2B	Black	White	1%: 4 Digits 2%, 5%: 3 Digits
	—	Black	White or Laser	4 Digits + tolerance
TSL	—	Black	White	4 Digits designator
TLR	1E/2A/3APS (2m)	Black	None	None
	2BW/2HW	Silver	None	None
	2B/3A/3AW/3AP	Silver	Black	4 Digits
	3A/3AW/3AP (0.5m-1.5m)	Black	Black	4 Digits
	2BP	Black	None	None
TLRZ	1E/1J/2A/2B	Black	None	None
TLRH	2A/3AW/3AP	Black	Silver	4 Digits, 2A-no marking
LR72	—	Silver	None	3 Digits
CSR	—	Black	White	Distinctive
RD41	—	Ivory	3 color band	None
RN41	—	Blue	3 color band	None
RM41	—	Green	3 color band	None
CPCN	—	Gray	None	None
RKC, RKH RKL	—	Black	White	1%=4 Digits 2%, 5%=3 Digits
MRP	—	Black	White	Alphanumeric
MRS	—	Black	White	Alphanumeric
LT73(V)	—	Bronze	Black	3 Digits
LA73	—	Orange	Black	3 Digits
NT	1J	Pink	—	—
	2A, 2B	Pink	Black	3 Digit
RF73	—	Brown	Black	3 Digits
CCP	—	Black	White	2 Digits
CCF	—	White	Black	Alphanumeric

### marking (continued)

KSE Part Designation		Color		Marking Type
		Body	Marking	
TF16	SN, BN, VN	Black	White	Letter Designation
	AT	Black	Blue	Letter Designation
NV73	—	Black	None	None
NV73A	—	Black	None	None
NV73D	—	Black	None	None
MHL	1E	Brown	None	None
	1J	White	Black Stripe	None
KQ	0603	Black	White	3 Digits
	0805	Black	White	3 Digits
	1008	Black	White	3 Digits
KQ(T)	0402	White	None	None
KQC	0402	White	None	None
	0603	Black	None	None
LP73	—	Black	White	Alphanumeric
LPC	—	Black	None	None
CZB/CZP	—	Black	None	None
CF	1/4	Tan	—	Color Bands
CFP	1/4, 1/2	Green	—	Color Bands
CFS	1/4	Ivory	—	Color Bands
MF	1/4, 1/2, 1	Blue Gray	—	Color Bands
LF	1/8, 1/4, 1/2	Blue	—	Color Dot
RCR	16	Gray	—	Color Bands
	50+, 50EN	Green	—	Color Bands
	60	White	—	Color Bands
	75, 100	Black	—	Color Bands
PCF	—	Light Green	—	Color Bands
HPC	—	Redish Brown	White	Alphanumeric
RK92	—	Black	White	Alphanumeric
RK92-L	—	Green	White	Alphanumeric
MOS(x)	—	Pink	Color Bands	or Alphanumeric
SPR	1/4, 1/2, 1	Light Green	Color Bands	Color Bands
SPR	2, 3, 5	Light Green	Black	Alphanumeric
CWFS	—	Gray	Black	Alphanumeric
CW	1/4	Green	—	Alphanumeric
CW,CW_X	—	Blue	—	Color Bands
CW_P	—	Blue	—	Alphanumeric
CW1S	—	Black	—	Alphanumeric
CW1SS	—	Black	—	2 Silver bands
CWH	—	Black	—	Alphanumeric
RW	—	Black	—	Alphanumeric
BPR	—	White	Black	Alphanumeric
RF	—	Blue	—	Color Bands
RF25CC	—	Blue	—	Color Bands
SF	—	Black	—	Alphanumeric
MRS	—	Black	—	No Marking
RNS	—	Light Gray	—	Alphanumeric
CR	—	Black	—	Alphanumeric

### significant figures of nominal resistance

E-12 Decade Values					
10	12	15	18	22	27
33	39	47	56	68	82
E-24 Decade Values					
10	11	12	13	15	16
18	20	22	24	27	30
33	36	39	43	47	51
56	62	68	75	82	91
E-96 Decade Values					
100	102	105	107	110	113
115	118	121	124	127	130
133	137	140	143	147	150
154	158	162	165	169	174
178	182	187	191	196	200
205	210	215	221	226	232
237	243	249	255	261	267
274	280	287	294	301	309
316	324	332	340	348	357
365	374	383	392	402	412
422	432	442	453	464	475
487	499	511	523	536	549
562	576	590	604	619	634
649	665	681	698	715	732
750	768	787	806	825	845
866	887	909	931	953	976
E-192 Decade Values					
100	101	102	104	105	106
107	109	110	111	113	114
115	117	118	120	121	123
124	126	127	129	130	132
133	135	137	138	140	142
143	145	147	149	150	152
154	156	158	160	162	164
165	167	169	172	174	176
178	180	182	184	187	189
191	193	196	198	200	203
205	208	210	213	215	218
221	223	226	229	232	234
237	240	243	246	249	252
255	258	261	264	267	271
274	277	280	284	287	291
294	298	301	305	309	312
316	320	324	328	332	336
340	344	348	352	357	361
365	370	374	379	383	388
392	397	402	407	412	417
422	427	432	437	442	448
453	459	464	470	475	481
487	493	499	505	511	517
523	530	536	542	549	556
562	569	576	583	590	597
604	612	619	626	634	642
649	657	665	673	681	690
698	706	715	723	732	741
750	759	768	777	787	796
806	816	825	835	845	856
866	876	887	898	909	920
931	942	953	965	976	988



## Rated Power:

The maximum value of power which can be continuously loaded to a resistor at a rated ambient temperature.

## Rated Voltage:

The maximum value of D.C. voltage or A.C. voltage (rms) capable of being applied continuously to a resistor at the rated ambient temperature. Rated voltage shall be calculated from the following formula:

Rated Voltage(V) =

$$\sqrt{\text{Rated Power(W)} \times \text{Nominal Resistance Value (ohm)}}$$

However, it shall not exceed the maximum working voltage.

## Critical Resistance Value:

The maximum nominal resistance value at which the rated power can be loaded without exceeding the maximum working voltage. The rated voltage is equal to the maximum working voltage in the critical resistance value.

## Maximum Working Value:

The maximum value of D.C. voltage or A.C. voltage (rms) capable of being applied continuously to a resistor or a resistor element. However, the maximum value of the applicable voltage is the rated voltage at the critical resistance value or lower.

## Maximum Overload Voltage:

The maximum value of voltage capable of being applied to a resistor for five seconds in the short-time overload test. Typically the applied voltage in the short-time overload test shall be 2.5 times larger than the rated voltage. However, it shall not exceed the maximum overload voltage.

## Dielectric Withstanding Voltage:

A.C. voltage (rms) that can be applied to a designated spot between the electrode and the outer coating for one minute in the dielectric withstanding voltage test.

## Rated Ambient Temperature:

The maximum ambient temperature at which a resistor is capable of being used continuously with the prescribed rated power. The rated ambient temperature refers to the temperature around the resistor inside the equipment, not to the air temperature outside the equipment.

## Derating Curve:

The curve that expresses the relation between ambient temperature and the maximum value of continuously loadable power at its temperature, which is generally expressed in percentage.

## Temperature Coefficient of Resistance (T.C.R.):

The rate of change in resistance value per 1°C in the prescribed temperature within the range of resistor operating temperature shall be expressed in the following formula:

$$\text{T.C.R. (ppm/°C)} = \frac{R-R_0}{R_0} \times \frac{1}{T-T_0} \times 10^6$$

Where: R: Measured Resistance at T°C  
R<sub>0</sub>: Measured Resistance at T<sub>0</sub>°C  
T: Measured Test Temperature (°C)  
T<sub>0</sub>: Measured Base Temperature (°C)



## surface mount inductors

### Open Core Wirewound Chip Inductors

- KQT0402TK001Kit**  
Lead-free, 47 values 10 pcs each
- KQ0603TK001Kit**  
Lead-free, 52 values 10 pcs each
- KQ0805TK001Kit**  
Lead-free, 36 values 10 pcs each
- KQ1008TK001Kit**  
Lead-free, 40 values 10 pcs each
- KQC0402TK001Kit**  
Lead-free, 12 values 20 pcs each
- KQC0603TK001Kit**  
Lead-free, 12 values 20 pcs each

### High Current Chip Inductors

- LPC4045AK001kit**  
Lead-free, 19 values 25 pcs each
- LPC4235AK001kit**  
Lead-free, 17 values 25 pcs each

NOTE: Reference product data pages for available values.

## surface mount resistors

### NEW Anti-Sulfur Precision Flat Chip Resistors

- RK73H1ERT-Kit1 (0402 chip size)**  
122 values, 100 pcs each
- RK73H1JRT-Kit1 (0603 chip size)**  
122 values, 100 pcs each

### Precision Flat Chip Resistors

- RK73H1FTK001Kit (01005 chip size)**  
38 values, Lead-free, 25 pcs each (10R0 ~ 620K = ±1%)
- RK73H1HTK001Kit (0201 chip size)**  
217 values, Lead-free, 50 pcs each (0, 10R0 ~ 1M00 = ±1%)
- RK73H1ETK001Kit (0402 chip size)**  
122 values, Lead-free, 50 pcs each (0, 10R0 ~ 1M00 = ±1%) E-24
- RK73H1JTK001Kit (0603 chip size)**  
122 values, Lead-free, 50 pcs each (0, 10R0 ~ 1M00 = ±1%) E-24
- RK73H2ATK001Kit (0805 chip size)**  
122 values, Lead-free, 50 pcs each (0, 10R0 ~ 1M00 = ±1%)
- RK73H2BTK001Kit (1206 chip size)**  
122 values, Lead-free, 50 pcs each (0, 10R0 ~ 1M00 = ±1%)

### General Purpose Flat Chip Resistors

- RK73B1FTK001Kit (01005 chip size)**  
51 values, Lead-free, 25 pcs each (0, 10 ~ 1M = ±5%)
- RK73B1HTK001Kit (0201 chip size)**  
139 values, Lead-free, 50 pcs each (0, 2R2 ~ 2M2 = ±5%)

## surface mount resistors (continued)

### High Voltage Flat Chip Resistors

- HV73TK001Kit (0603, 0805, 1206, 2010 chip sizes)**  
156 values, Lead-free, 25 pcs each (10k ~ 10M = +1%)

### Varistors

- NV73TK001Kit (0201, 0402, 0603, 0805, 1206, 1210, 1812, 2220 chip sizes)**  
Lead-free, 122 values, 10 pcs each size
- NV73DLTK001Kit (0603, 0805, 1206 chip sizes)**  
17 values, Lead-free, 10 pcs each size

### Surge Current Flat Chip Resistors

- SG73TK001Kit (0603, 0805, 1206, 1210, 2010, 2512 chip sizes)**  
204 values, ±10%, Lead-free, 25 pcs each
- SG73STK001Kit (0603, 0805, 1206, 1210 chip sizes)**  
101 values, ±1%, Lead-free, 25 pcs each
- SG73PTK001Kit (0603, 0805, 1206, 1210 chip sizes)**  
97 values, ±1%, Lead-free, 25 pcs each

### Wide Terminal Flat Chip Resistors

- WK73TK001Kit (0612, 1020, 1218 & 1225 chip sizes)**  
79 values, Lead-free, 25 pcs each (±1%, ±5%)
- WU73TK001Kit (0612 chip sizes)**  
17 values, 20 pcs each (±1%)

NOTE: Reference product data pages for available values.

## surface mount resistors (continued)

### Ultra Precision Flat Chip Resistor

- RN731ETK016Kit25 (0402 chip size)**  
193 values, Lead-free, 25 pcs each ( $\pm 0.1\%$ , 25ppm $^{\circ}\text{C}$ )
- RN731JTK016Kit25 (0603 chip size)**  
85 values, Lead-free, 25 pcs each ( $\pm 0.1\%$ , 25ppm $^{\circ}\text{C}$ )
- RN732ATK016Kit25 (0805 chip size)**  
289 values, Lead-free, 25 pcs each ( $\pm 0.1\%$ , 25ppm $^{\circ}\text{C}$ )
- RN732BTK016Kit25 (1206 chip size)**  
289 values, Lead-free, 25 pcs each ( $\pm 0.1\%$ , 25ppm $^{\circ}\text{C}$ )
- RN73H1ET-Kit (0402 chip size)**  
49 values, Lead-free, 50 pcs each ( $\pm 0.1\%$ , 25ppm $^{\circ}\text{C}$ )
- RN73H1JT-Kit (0603 chip size)**  
67 values, Lead-free, 50 pcs each ( $\pm 0.1\%$ , 25ppm $^{\circ}\text{C}$ )
- RN73H2AT-Kit (0805 chip size)**  
73 values, Lead-free, 50 pcs each ( $\pm 0.1\%$ , 25ppm $^{\circ}\text{C}$ )

### Circuit Protection - Thermal Sensors

- NT73TK001Kit (0603, 0805, 1206 chip sizes)**  
Lead-free, 53 values (1J, 2A, 2B), 10 pcs each size

### Circuit Protection - Fuses

- CCFTK001Kit (2410 chip size)**  
18 values, Lead-free, 20 pcs each
- CCPTK001Kit (1206, 1210 chip sizes)**  
35 values, Lead-free, 20 pcs each
- FuseKit-TF10BN (0402 chip size)**  
12 values, Lead-free, 100 pcs each
- FuseKit-TF16SN (0603 chip size)**  
14 values, Lead-free, 100 pcs each
- FuseKit-TF16AT (0603 chip size)**  
13 values, Lead-free, 100 pcs each

NOTE: Reference product data pages for available values.

## current sense resistors

### Surface Mount Molded

- SLW07TK001Kit (2010, 1W size)**  
27 values, 20 pcs each ( $\pm 1\%$ ).
- SLW1TK001Kit (2512, 1.5W size)**  
25 values, 20 pcs each ( $\pm 0.5\%$ ).
- SL1TK001Kit (2512, 1W size)**  
58 values, 20 pcs each ( $\pm 1\%$ ).
- SL2TK001Kit (4528, 2W size)**  
45 values, 20 pcs each ( $\pm 1\%$ ).
- SL3TK001Kit (4528, 3W size)**  
33 values, 20 pcs each ( $\pm 1\%$ ).
- SLN3TK001Kit (4528, 3W size)**  
32 values, 20 pcs each ( $\pm 0.5\%$ ).
- SLN5TK001Kit (4528, 5W size)**  
21 values, 10 pcs each ( $\pm 0.5\%$ ).
- TSL1TK001Kit (2512, 1W size)**  
33 values, Lead-free, 20 pcs each ( $\pm 1\%$ ).
- PowerShuntTK001Kit (PSB, PSE, PSI)**  
9 values, Lead-free, 25 pcs each.

### Metal Plate

- TLR2ATK001Kit (0805 chip size)**  
9 values, complete range, 20 pcs each ( $\pm 1\%$ ).
- TLR2BWD-Kit (1206 chip size)**  
18 values, 15 pcs each ( $\pm 1\%$ ).
- TLR2HWD-Kit (2010 chip size)**  
10 values, 15 pcs each ( $\pm 1\%$ ).
- TLR3APD-Kit (2512 chip size)**  
10 values, 20 pcs each ( $\pm 1\%$ ).
- TLRDK001Kit (1206, 1210, 2512 chip sizes)**  
40 values, Lead-free, complete range, 20 pcs each ( $\pm 1\%$ ).

### Chip Resistors

- UR73TK001Kit (0402, 0603, 0805, 1206, 2512 chip sizes)**  
144 values, Lead-free, 20 pcs each ( $\pm 1\%$ ).
- UR73VTK001Kit (1206 chip sizes)**  
8 values, 20 pcs each ( $\pm 1\%$ ).

### Thick Film

- SR731HTK001Kit (0201 chip size)**  
29 values, Lead-free, 50 pcs each (R47 ~ 10R0,  $\pm 1\%$ ,  $\pm 5\%$ )
- SR731ETK001Kit (0402 chip size)**  
49 values, Lead-free, 50 pcs each (R100 ~ 1R00,  $\pm 1\%$ )
- SR731JTK001Kit (0603 chip size)**  
49 values, Lead-free, 50 pcs each (R100 ~ 10R0,  $\pm 1\%$ )
- SR732ATK001Kit (0805 chip size)**  
49 values, Lead-free, 50 pcs each (R100 ~ 10R0,  $\pm 1\%$ )
- SR732BTK001Kit (1206 chip size)**  
49 values, Lead-free, 50 pcs each (R100 ~ 10R0,  $\pm 1\%$ )
- SR732ETK001Kit (1210 chip size)**  
49 values, Lead-free, 50 pcs each (R100 ~ 10R0,  $\pm 1\%$ )
- SR732HTK001Kit (2010 chip size)**  
49 values, Lead-free, 50 pcs each (R100 ~ 10R0,  $\pm 1\%$ )
- SR733ATK001Kit (2512 chip size)**  
49 values, Lead-free, 50 pcs each (R100 ~ 10R0,  $\pm 1\%$ )

NOTE: Reference product data pages for available values.

**APM Naltron**

8710 W. Hillsborough Ave (Suite 301)  
Tampa, FL 33615  
1100 Town Plaza Court  
(Suite 1020- B) (Shipments)  
Winter Springs, FL 32708  
PH: 813-886-2457

**Astec Components Ltd.**

2140 Winston Park Dr (Suite 204)  
Oakville, Ontario, Canada  
L6H 5V5  
PH: 905-607-1444  
FX: 905-607-9991

**Astec Components Ltd.**

190-19567 Fraser Highway  
Surrey, British Columbia, Canada  
V3S 9A4  
PH: 604-532-3881  
FX: 604-532-3886

**Carlberg & Associates**

451 E. Juanita Ave. (Suite One)  
Mesa, AZ 85204  
PH: 602-909-8066  
FX: 480-460-1123

**Carlberg & Associates**

7336 Mission Viejo Dr  
El Paso, TX 79912  
PH: 915-309-0009 (Cell)

**Carlberg & Associates**

Rio Usumacinta (#120)  
Col. Crystal Lagoons  
Apodaca, NL 66604  
Mexico  
PH: 011+521 8180243967 (Cell)

**CFE- MacInnis**

1650 Sycamore Ave (Suite 9)  
Bohemia, NY 11716  
PH: 631-567-3377  
FX: 631-567-3378

**DL Marketing**

405 Ave Esmeralda  
Guaynabo, PR 00969  
PH: 787-640-0488 (Cell)

**Fastec Mexico SA DE CV**

Ontario #1791-9  
Col. Colomos Providencia  
Guadalajara, Jalisco 44660  
Mexico  
PH: 011 52 33 3641 5051  
FX: 011 52 33 3641-5052

**Greenslade Sales, Inc.**

505 E. Golf Road (Suite A)  
Arlington Heights, IL 60005  
PH: 847-593-3450  
FX: 847-593-3468

**Halbar - RTS**

1110 8th St  
Kirkland, WA 98033  
PH: 425-893-8400  
FX: 425-893-8500

**Halbar - RTS**

8196 SW Hall Blvd. (Suite 115)  
Beaverton, OR 97008  
PH: 425-893-8400  
FX: 425-893-8500

**Hughes Cain & Associates**

2221 Justin Rd (#119-329)  
Flower Mound, TX 75028  
PH: 214-995-1034

**Hughes Cain & Associates**

108 Timberlake Dr  
Kingsland, TX 78636  
PH: 512-826-3039

**Hughes Cain & Associates**

6535 Tradition Circle  
Brownsville, TX 78526  
PH: 011-52 868 819 2290

**John F. Kilfoil Company**

9200 Montgomery Rd (Suite 3A/4A)  
Cincinnati, OH 45209  
PH: 513-791-6150  
FX: 513-791-6153

**John F. Kilfoil Company**

28275 Farris Garden Path  
Westlake, OH 44145  
PH: 216-695-8682 (Cell)

**John F. Kilfoil Company**

11202 Governors Lane  
Fishers, IN 46037  
PH: 317-450-2635 (Cell)

**JF Kilfoil Michigan**

3675 Running Brook Dr SE  
Kentwood, MI 49512  
PH: 616-498-0288 (Cell)

**JF Kilfoil Michigan**

37875 West Twelve Mile Rd  
(Suite 100)  
Farmington Hills, MI 48331  
PH: 248-705-0693 (Cell)

**Metz-Jade Associates, Inc.**

Paoli Executive Green II (Suite 200)  
43 Leopard Rd  
Paoli, PA 19301  
PH: 484-318-7779  
FX: 484-318-7842

**Northeast Representatives**

PO Box 447  
570 Pleasant St (Shipments)  
Marshfield, MA 02051  
PH: 781-837-8788  
FX: 781-837-9342

**Rep One Associates, Inc.**

403 Madison St  
Huntsville, AL 35801  
PH: 256-539-7371

**Rep One Associates, Inc.**

3235 Satellite Blvd (Bldg. 400,  
Suite 300)  
Duluth, GA 30096  
PH: 770-209-9242

**Rep One Associates, Inc.**

912 Oleander Lane  
Waxhaw, NC 28173  
PH: 704-516-0242

**Rep One Associates, Inc.**

432 East Park Ave (Unit C)  
Charlotte, NC 28203  
PH: 704-626-0912

**Rep One Associates, Inc.**

207 Stromer Dr  
Cary, NC 27513  
PH: 919-632-0980

**Spectrum Sales**

6800 W. 107th St (Suite 200)  
Overland Park, KS 66212  
PH: 913-648-6811

**Spectrum Sales**

36 Four Seasons Center (Suite 276)  
Chesterfield, MO 63017  
PH: 636-537-5266

**Spectrum Sales**

380 Kilbirnie Rd  
Robins, IA 52328  
PH: 319-444-9957  
Cell: 319-360-6351

**Straube Associates**

7970 Sheridan Blvd (Suite C)  
Westminster, CO 80003  
PH: 303-426-0890  
FX: 303-426-0896

**Straube Associates**

3059 East 7180 South  
Salt Lake City, Utah 84121  
PH: 801-556-0214

**Straube Associates (SAI)**

333 W. Maude Ave. (Suite 205)  
Sunnyvale, CA 94085  
PH: 650-969-6060

**Tradecomp**

Rua Sansao Alves dos Santos  
433-CJ 61 - Brooklin Novo  
Sao Paulo - SP  
Brazil - 04571-090  
PH: (55) 11 5507-2627  
FX: (55) 11 5505-7905

**Tri-Tech Electronics, Inc.**

2200 West Ridge Rd (Suite 100)  
Rochester, NY 14626  
PH: 585-385-6500

**Victory Sales America, Inc.**

4600 W. 77th St. (Suite 205)  
Edina, MN 55435  
PH: 612-615-9777  
FX: 651-994-6978

**Westrep CA**

400 N. Tustin Ave (Suite 130)  
Santa Ana, CA 92705  
PH: 714-527-2822  
FX: 714-527-3868

State	City/Zip	Name	Street	Phone
AL	Huntsville	Arrow Electronics	4930 Corporate Drive (Ste F)	256-864-3300
	Huntsville	Carlton-Bates	250 Finney Road	800-859-5859
	Huntsville	TTI, Inc.	4725 Whitesburg Drive (Ste 201)	256-721-1597
AR	Little Rock	Carlton-Bates	3600 W. 69th Street	844-284-3700
AZ	Phoenix	Arrow Electronics	1955 East Sky Harbor Circle N	602-256-2290
	Phoenix	Carlton-Bates	3380 W. Durango	501-235-4224
	Tempe	TTI, Inc.	2151 East Broadway Road (Ste 211)	480-638-1590
CA	Foothill Ranch	Arrow Electronics	26632 Towne Centre Drive (Ste 100)	949-380-4700
	San Diego	Arrow Electronics	10089 Willow Creek Road (Ste 225)	858-536-7600
	San Jose	Arrow Electronics	1732 N. 1st St (Ste 300)	669-342-3800
	Woodland Hills	Arrow Electronics	20935 Warner Center Lane	818-932-1000
	Fremont	Mouser Electronics, Inc.	48371 Fremont Blvd. (Ste 107)	408-717-0167
	Irvine	SMD, Inc.	1 Oldfield	949-470-7700
	Chatsworth	TTI, Inc.	9121 Oakdale Avenue (Ste 200)	818-407-8000
	Fremont	TTI, Inc.	48371 Fremont Blvd. (Ste 107)	510-668-0830
	San Diego	TTI, Inc.	13220 Evening Creek Drive South (Ste 101)	858-748-2025
	Tustin	TTI, Inc.	14511 Myford Road (Ste 210)	714-505-4857
	CO	Englewood	Arrow Electronics	7459 S. Lima Street (Bldg 1)
Denver		Carlton-Bates	6883 E. 47th Ave	855-395-1654
Westminster		TTI, Inc.	9035 Wadsworth Pkwy (Ste 1600)	303-427-0241
CT	Wallingford	Arrow Electronics	2 Barnes Industrial Rd South	203-265-7741
	Wallingford	Midstate Electronics	71 South Turnpike Road	203-265-9900
	Wallingford	TTI, Inc.	8 Fairfield Blvd.	203-949-6262
FL	Lake Mary	Arrow Electronics	200 Colonial Center Pkwy (Ste 250)	321-233-8800
	Plantation	Arrow Electronics	8211 W. Broward Blvd (Ste 430)	954-429-8200
	Orlando	TTI, Inc.	5810 Hoffner Ave. (Ste 801)	407-273-6977
GA	Duluth	Arrow Electronics	2915 Premiere Parkway (Ste 150)	770-495-5200
	Norcross	Carlton-Bates	5050 Oakbrook Parkway	877-706-6576
IL	Itasca	Arrow Electronics	1162 Springlake Drive	630-250-0916
	Elmhurst	Carlton-Bates	723 Oaklawn Ave.	888-654-4011
	Schaumburg	TTI, Inc.	915 National Parkway (Ste 30 Entrance D)	847-884-6500
IN	Indianapolis	Arrow Electronics	3077 E. 98th Street (Ste 160)	317-810-6254
KS	Overland Park	Arrow Electronics	10740 Nail Ave. (Ste 390)	913-469-3691
	Shawnee	Carlton-Bates	10814 West 78th Street	877-787-7130
	Overland Park	TTI, Inc.	6405 Metcalf Ave (Ste 105)	913-789-6427
MA	Peabody	Arrow Electronics	4 Technology Drive	978-538-8630
	Tewksbury	TTI, Inc.	Three Highwood Drive	978-851-2000
MD	Columbia	Arrow Electronics	7067 Columbia Gateway Drive	410-312-4600
	Columbia	TTI, Inc.	6304 Woodside Court (Ste 115)	410-995-6627
MI	Plymouth	Arrow Electronics	44720 Helm Street	734-335-9260
MN	Bloomington	Arrow Electronics	10900 Nesbitt Ave. S	952-456-3500
	Minneapolis	TTI, Inc.	7825 Washington Avenue South (Ste 800)	952-829-7200
MO	Earth City	Arrow Electronics	514 Earth City Expressway (Ste 321)	314-725-4164
	Springfield	Carlton-Bates	241 South Union Ave	866-618-4518
	St. Louis	Carlton-Bates	2820 Market Street	314-655-2978
NC	Durham	Arrow Electronics	4601 Creekstone Dr (Ste 203)	919-768-6812
	Raleigh	Carlton-Bates	501A Uwharrie Ct	855-832-9164
	Wilmington	Justin Electronics	108 North Kerr Avenue (Ste F-1)	910-791-9688
	Raleigh	TTI, Inc.	220 Horizon Drive (Ste 203)	919-876-8922

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/05/18



State	City/Zip	Name	Street	Phone
NH	Merrimack	Brevan Electronics, Inc.	6 Continental Blvd.	603-429-1900
	Salem	SMD, Inc.	7B Raymond Avenue	603-681-0320
NJ	Parsippany	Arrow Electronics	90 E. Halsey Road (Ste 114)	973-560-3820
	Rockaway	Tonar Industries, Inc.	419 Franklin Avenue	973-586-9000
	Mount Laurel	TTI, Inc.	307 Fellowship Road (Ste 100)	856-234-6400
NY	Islandia	Arrow Electronics	3001 Express Drive North (Ste 100)	631-851-2300
	Pittsford	Arrow Electronics	1000 Pittsford-Victor Rd (2nd Floor)	585-427-0300
	Hauppauge	Justin Electronics	400 Oser Avenue (Ste 800)	631-951-4900
	Bellport	M3 Technology	58 Sawgrass Drive	631-205-0005
	Ronkonkoma	TTI, Inc.	3281 Veterans Highway (Ste E-3)	631-737-2000
	Victor	TTI, Inc.	7640 Omnitech Pl (Ste 5-C)	203-949-6262
OH	Dayton	Arrow Electronics	7887 Washington Village Dr. (Ste 200)	800-348-4619
	Solon	Arrow Electronics	6675 Parkland Blvd.	440-248-9996
	Columbus	Carlton-Bates	2256 Citygate Drive	866-431-3802
	Warren	REM Electronics	525 S. Park Avenue	330-373-1300
	Dayton (Centerville)	TTI, Inc.	10564 Success Lane (Ste B)	937-885-6270
	Independence	TTI, Inc.	Corporate Plaza 2 6480 Rockside Woods Blvd. (Ste 110)	216-524-2810
OK	Tulsa	Arrow Electronics	12111 E 51 Street (Ste 101)	918-557-9277
	Broken Arrow	Carlton-Bates	13047 E. 59th Street	844-443-4289
	Norman	Carlton-Bates	2350 McKown Drive	844-284-3700
OR	Beaverton	Arrow Electronics	6600 SW 105th Avenue (Ste 100)	503-629-1400
	Beaverton	TTI, Inc.	8700 SW Nimbus Avenue (Ste B)	503-644-4560
PA	Fort Washington	Arrow Electronics	500 Office Center Drive (Ste 400)	215-956-4800
	Pittsburgh	Arrow Electronics	3245 Old Frankstown Road	724-327-1130
	Newton	Carlton-Bates	12 Penns Trail	866-331-1385
	Erie	REM Electronics Inc.	2043 W. 12th Street	814-453-5626
SC	Greenville	Carlton-Bates	706A Garlington Road	855-832-9164
TN	Johnson City	Carlton-Bates	524 Suncrest Drive	800-482-5439
	Memphis	Carlton-Bates	3953 Hickory Road	800-223-6157
TX	Austin	Arrow Electronics	1908 Kramer Lane, Braker B (Ste 200)	512-672-8900
	El Paso	Arrow Electronics	4150 Rio Bravo (Ste 150)	915-834-6100
	Addison	Arrow Electronics	15455 Dallas Parkway (Ste 600)	972-985-6600
	Houston	Carlton-Bates	7049 Brookhollow West Dr	844-443-4289
	El Paso	REM Electronics, Inc.	7500 Viscount (Ste 187)	915-778-7333
	El Paso	SMD, Inc.	11 Founders Blvd. (Ste 600)	949-470-7700
	Houston	TTI, Inc.	6051 North Course Drive (Ste 250)	713-339-2700
	Irving	TTI, Inc.	4600 Fuller Drive (Ste 100)	972-594-5900
	Fort Worth	TTI, Inc. (Corporate Headquarters)	2441 Northeast Parkway	817-740-9000
	Fort Worth	TTI, Inc. (Mexico & Latin America)	5050 Mark IV Parkway	817-624-6380
	Fort Worth	TTI, Inc. (Telemarketing)	5050 Mark IV Parkway	817-624-6380
	Fort Worth	TTI, Inc. (Teleservices & BDG)	5050 Mark IV Parkway	817-624-6380
	Mansfield	Mouser Electronics, Inc.	1000 N. Main Street	817-804-3800
UT	Salt Lake City	Arrow Electronics	448 E 6400 S (Ste 400)	801-313-7300
WA	Bellevue	Arrow Electronics	3380 14th Pl SE (Ste 301)	425-643-9992
	Redmond	TTI, Inc.	11121 Willows Road NE (Ste 130)	425-882-0291



State	City/Zip	Name	Street	Phone
<b>WI</b>	Brookfield	Arrow Electronics	400 N. Executive Drive (Ste 112)	262-879-0434
	Green Bay	Carlton-Bates	2740 South Ashland Ave	920-499-6000
	Jackson	Carlton-Bates	N173 W21490 Northwest Passage Way	800-558-7033
	Oconomowoc	GW Electronics	1833 Executive Drive	262-567-9445
	Brookfield	TTI, Inc.	250 North Patrick Blvd (Ste 160)	262-797-9233
<b>Canada</b>				
<b>AB</b>	Calgary	Arrow Electronics	160 Quarry Park Blvd, SE	403-735-2800
<b>BC</b>	Burnaby	Arrow Electronics	4946 Canada Way (Unit 125)	604-630-4300
<b>Ontario</b>	Mississauga	Arrow Electronics	171 Superior Boulevard (Unit 2)	905-670-7769
	Ottawa	Arrow Electronics	343 Preston Street (Unit 1163)	343-291-1112
	Woodbridge	TTI, Inc.	111A Zenway Blvd. 13	905-850-3003
<b>Quebec</b>	Dorval	Arrow Electronics	1425 Trans Canada Highway (Ste 140)	514-421-4360
	Pointe-Claire	TTI, Inc.	52 Hymus Boulevard (Ste 102)	514-426-1212



## KOA Overseas Sales Offices and Plants

Area	Country	Sales Office	Street	Phone	FAX
Japan	Japan	Global Sales Center	2-17-2 Midori-Cho, Fuchu-Shi, Tokyo 183-0006, Japan	(+81) 42-336-5755	(+81) 42-336-5353
North and South America	USA	KOA Speer Electronics, Inc.	Bolivar Drive, P.O. Box 547 Bradford, PA.16701, USA	(+1) 814-362-5536	(+1) 814-362-8883
Europe	Germany	KOA Europe GMBH	Kaddenbusch 6, D-25578 Dägeling Itzehoe, Germany	(+49) 4821-8989-0	(+49) 4821-8989-89
	Sweden	KOA Nordic	c/o EG Components Sweden AB, Box 39 SE-162 11, Vällingby, Sweden	(+46) 8 759 35 20	(+46) 8 739 28 58
Asia	Singapore	KOA Denko (S) PTE., Ltd.	72 Bendemeer Road, #06-02 Hiap Huat House, Singapore 339941	(+65) 63395151	(+65) 63398556
	Malaysia	KOA Denko (Malaysia) Berhad	Lots 7, 8 & 9, Batu Berendam FTZ 75350, Malacca, Malaysia	(+60) 6-2328031-3	(+60) 6-2328030
	Hong Kong	KOA Electronics (H.K.) Ltd.	Unit 1803, Miramar Tower, 132 Nathan Road T.S.T., Kowloon, Hong Kong	(+852) 2492-6918	(+852) 2492-7398
	China	Shanghai KOA Electronics Trading Co., Ltd.	Xin Yin Building Room No. 1702 Yi Shan Road 888 Shanghai, China 200233	(+86) 21-64320101	(+86) 21-64320083
	China	Shanghai KOA Electronics Co., Ltd.	No. 581 Guiping Road, Cao He Jing, Shanghai, China	(+86) 21-64850723	(+86) 21-64852960
	China	Wuxi KOA Electroceramics Co., Ltd.	Heqiao, Yixing City, Jiangsu Province, China	(+86) 510-7871645	(+86) 510-7871626
	China	KOA Electronics (Taicang) Co., Ltd.	No. 111 Luoyang Road, Taicang Economy Development Area, Taicang, Jiangsu Province, China	(+86) 512-53561111	(+86) 512-53561600
	Taiwan R.O.C.	Dah Hsing Electric Co., Ltd.	11th Floor Ping-An Mansion, No. 34 Sec.1, Nan-King East Road, Taipei, Taiwan, R.O.C.	(+886) 2-2521-4166	(+886) 2-2564-1859
	Taiwan R.O.C.	KOA Kaohsiung Corporation	17-2 Kai-Fa Road, N.E.P.Z. Kaohsiung, Taiwan, R.O.C.	(+886) 7-363-4157~8	(+886) 7-363-4543
	Japan	Head Office	3672 Ina, Ina-Shi, Nagano 396-8585, Japan	(+81) 265-78-2121	

## world class quality

Successful companies recognize the value in selecting suppliers committed to total quality. KOA Speer has long embraced the principals of continuous improvement to attain new performance levels in every aspect of customer support. Our manufacturing programs redefine industry standards with defect levels measured in parts per billion. This organization-wide focus on quality resulted in our receiving ISO 9001:2008 certification. In addition, our quality program has recently received the more stringent TS-16949 certification required to be a tier one supplier in the automotive industry.

## customer programs

KOA Speer can play a vital role in helping your operation achieve maximum efficiency. Our sales/customer service representatives will meet with your design, production and purchasing teams to create a program that makes sense for your organization. Among the areas we regularly address are data entry and access through customized EDI, and inventory management through dock-to-stock and JIT programs. Our willingness to not only develop these programs but to execute them as promised, makes KOA Speer a dependable partner worth integrating into your operation.

## responsive service

Providing products and answers when you need them is a fundamental policy at KOA Speer. Our 185,000 square foot warehouse features an automated material handling system based upon bar coding and radio frequency data communication (RFDC) to maintain an inventory of billions of components, while shipping millions of components per day. Standard product availability, the industry's most extensive electronic data interchange (EDI) program and a willingness to inventory to customer requirements, make KOA Speer JIT delivery an integral part of our customer's efforts at improving efficiency.

## a global presence .....

### North America

KOA Speer Electronics, Inc.  
Bradford, PA 16701 USA  
(814) 362-5536

### Europe

KOA Europe GmbH  
Dageling, Germany  
(49) 4821-89890

### China

Shanghai KOA Electronics  
Shanghai, China  
(86) 21-64855477

### Japan

KOA Corporation  
Tokyo, Japan  
(81) 4233-65755

### Singapore

KOA Denko Singapore  
(65) 339-5151

**KOA**<sup>®</sup>  
KOA SPEER ELECTRONICS, INC.  
[www.koaspeer.com](http://www.koaspeer.com)





199 Bolivar Drive  
Bradford, PA 16701  
Phone: 814-362-5536  
Fax: 814-362-8883  
[www.koaspeer.com](http://www.koaspeer.com)