




### features

- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Superior to RK73 series chip resistors in pulse withstanding voltage and high power
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified

### dimensions and construction

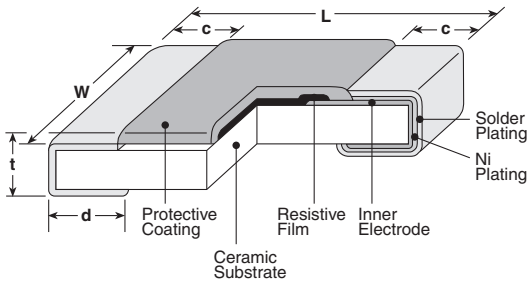

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
SG73S 1E, (0402)	.039 <sup>+0.004</sup> / <sub>-0.002</sub> (1.0 <sup>+0.1</sup> / <sub>-0.05</sub> )	.020±.002 (0.5±0.05)	.006±.004 (0.15±0.1)	.010 <sup>+0.002</sup> / <sub>-0.004</sub> (0.25 <sup>+0.05</sup> / <sub>-0.1</sub> )	.014±.002 (0.35±0.05)
SG73S 1J, (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
SG73S 2A, (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.012 <sup>+0.008</sup> / <sub>-0.004</sub> (0.3 <sup>+0.2</sup> / <sub>-0.1</sub> )	.012 <sup>+0.008</sup> / <sub>-0.004</sub> (0.3 <sup>+0.2</sup> / <sub>-0.1</sub> )	.020±.004 (0.5±0.1)
SG73S 2B, (1205)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.016 <sup>+0.008</sup> / <sub>-0.004</sub> (0.4 <sup>+0.2</sup> / <sub>-0.1</sub> )	.016 <sup>+0.008</sup> / <sub>-0.004</sub> (0.4 <sup>+0.2</sup> / <sub>-0.1</sub> )	.024±.004 (0.6±0.1)
NEW SG73S 2E, SG73S 2E1 (1210)		.102±.008 (2.6±0.2)			

### ordering information

SG73S	2A	RT	TD	103	J
Type	Power Rating	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance
SG73S	1E 1J 2A 2B 2E NEW 2E1	RT: Sn Anti-Sulfur	TP: 0402, 0603, 0805: 7" 2mm pitch punch paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TDD: 0603, 0805, 1206, 1210: 10" paper tape TE: 0805, 1206, 1210: 7" embossed plastic TED: 0805, 1206, 1210: 10" embossed plastic For further information on packaging, please refer to Appendix A	±0.5%, ±1%: 3 significant figures + 1 multiplier ±2%, ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω	D: ±0.5% F: ±1% G: ±2% J: ±5%

### applications and ratings

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range				Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range
					D: ±0.5% E-24, E-96	F: ±1% E-24, E-96	G: ±2% E-24	J: ±5% E-24			
SG73S 1E	0.125W	70°C	125°C	±200	100Ω - 1MΩ	10Ω - 1MΩ	10Ω - 10MΩ	1Ω - 10MΩ	75V	100V	-55°C to +155°C
	0.2W* <sup>2</sup>	—	105°C								
SG73S 1J	0.2W	70°C	125°C	±100* <sup>1</sup>					150V	200V	
	0.33W* <sup>2</sup>	—	—								
SG73S 2A	0.25W	70°C	125°C	±200					400V	600V (800V)* <sup>3</sup>	
	0.5W* <sup>2</sup>	—	100°C								
SG73S 2B	0.33W	70°C	125°C	±200					200V	400V	
	0.75W* <sup>2</sup>	—	105°C								
SG73S 2E	0.5W	70°C	125°C	±200					200V	400V	
	0.75W* <sup>2</sup>	—	110°C								
NEW SG73S 2E1	1.0W* <sup>2</sup>	—	95°C	±200							




\*<sup>1</sup> Cold T.C.R. (-55°C ~ +25°C) is ±150x10<sup>-6</sup>/K \*<sup>2</sup> If you want to use the rated power of \*<sup>2</sup>, \*<sup>3</sup> please reference below. \*<sup>3</sup> Applies when power rating is 0.4W or lower.

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog. Also, contact KOA prior to usage and for the max. working voltage and max. overload voltage.

### environmental applications

#### Derating Curve

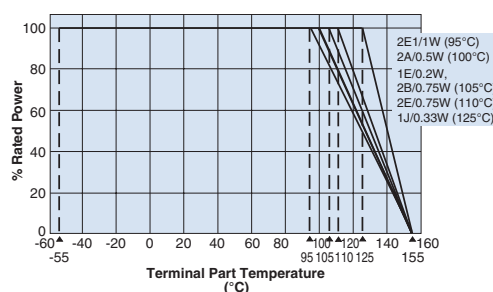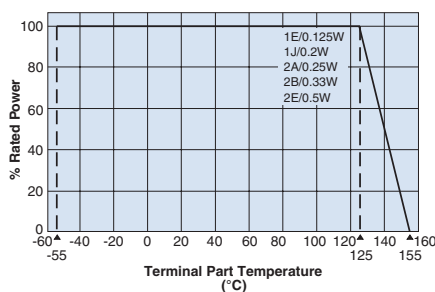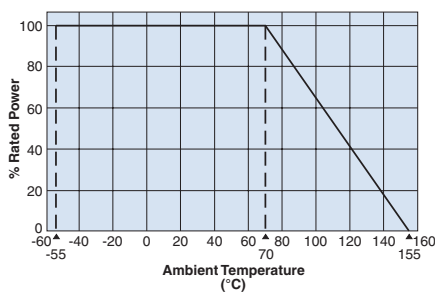

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

\*<sup>2</sup>, \*<sup>3</sup> If you want to use the rated power of \*<sup>2</sup>, \*<sup>3</sup>, please use the derating curve based on the terminal part temperature on the right hand side.


Additional environmental applications can also be found at [www.koaspeer.com](http://www.koaspeer.com)

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/25/18

### environmental applications (continued)

#### ESD Limiting Voltage

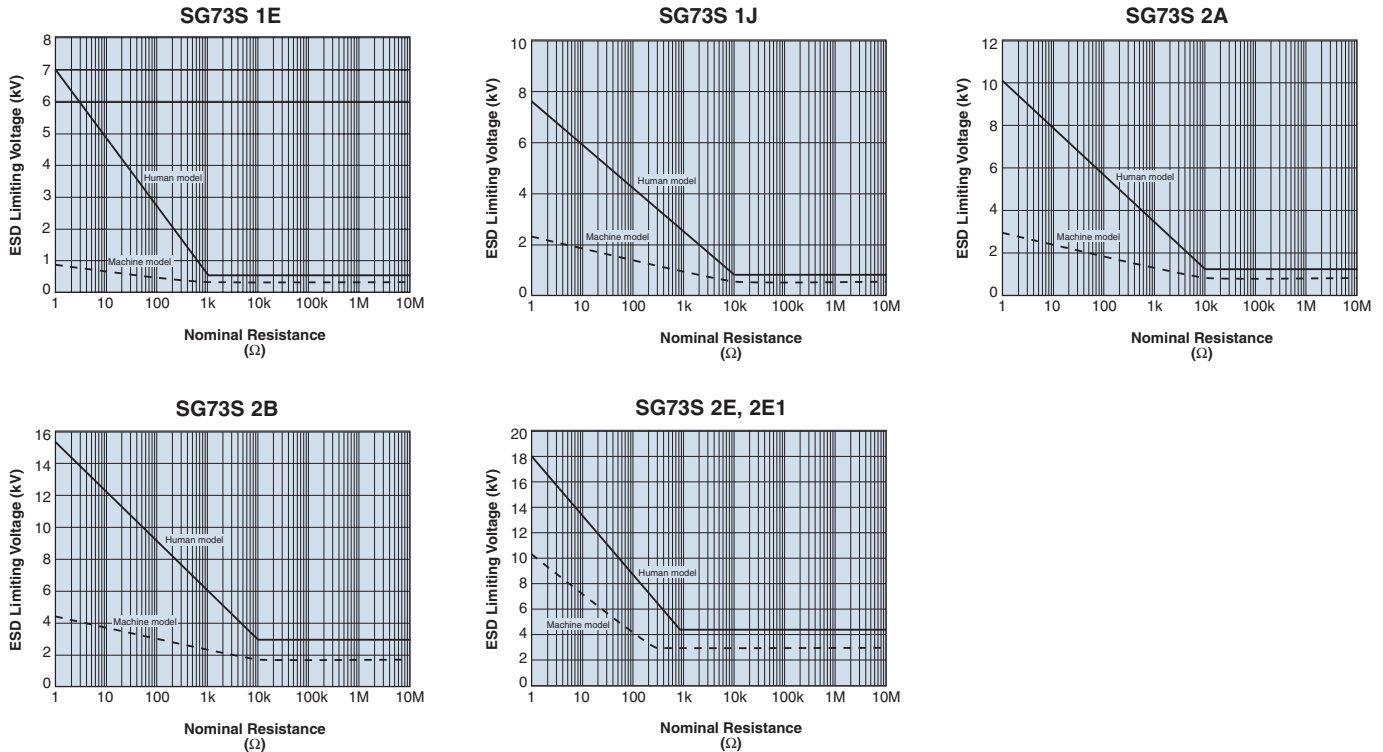

#### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±0.5%	Rated Voltage x 2.5 for 5 seconds (2A: 0.4W, 0.5W; 2B: 0.75W; 2E: 0.75W; 2E1: 1W x 2 for 5 seconds)
Resistance to Solder Heat	±1%	±0.75%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.3%	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±3%	±0.75%	40°C ± 2°C, 90%~95%RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±3%	±0.75%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.3%	+155°C, 1000 hours
Sulfuration Test	±5%	±0.2%	Soaked in industrial oil with 3.5% sulfur concentration 105°C ± 3°C, 500 hours